


STERLING 2997- ___ H







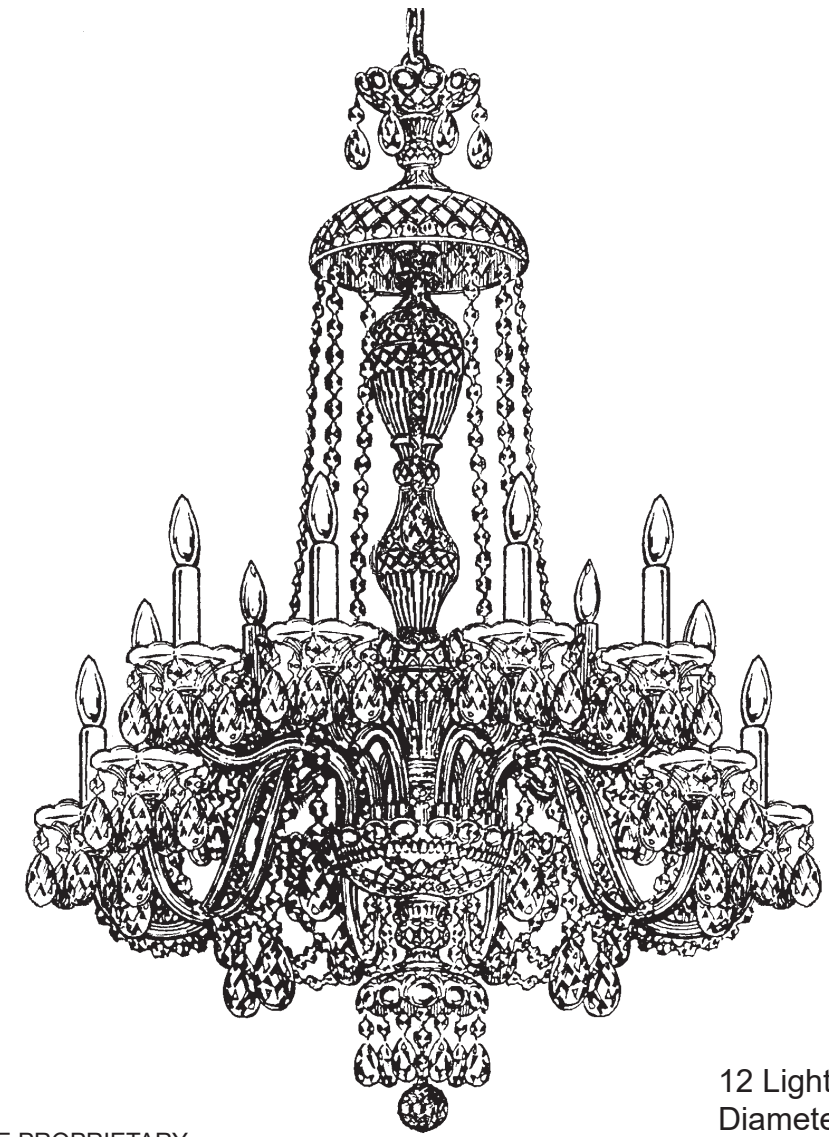





12 Lights
Diameter: 29"
Body Length: 37"
Hanging Weight: 32 lbs.



THIS DESIGN IS THE PROPRIETARY
TRADE DRESS/TRADEMARK OF
W SCHONBEK LLC.



 **SCHONBEK** | 1870


 **SCHONBEK** | 1870

								
MAX <u>60</u> W	110-120 V							

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

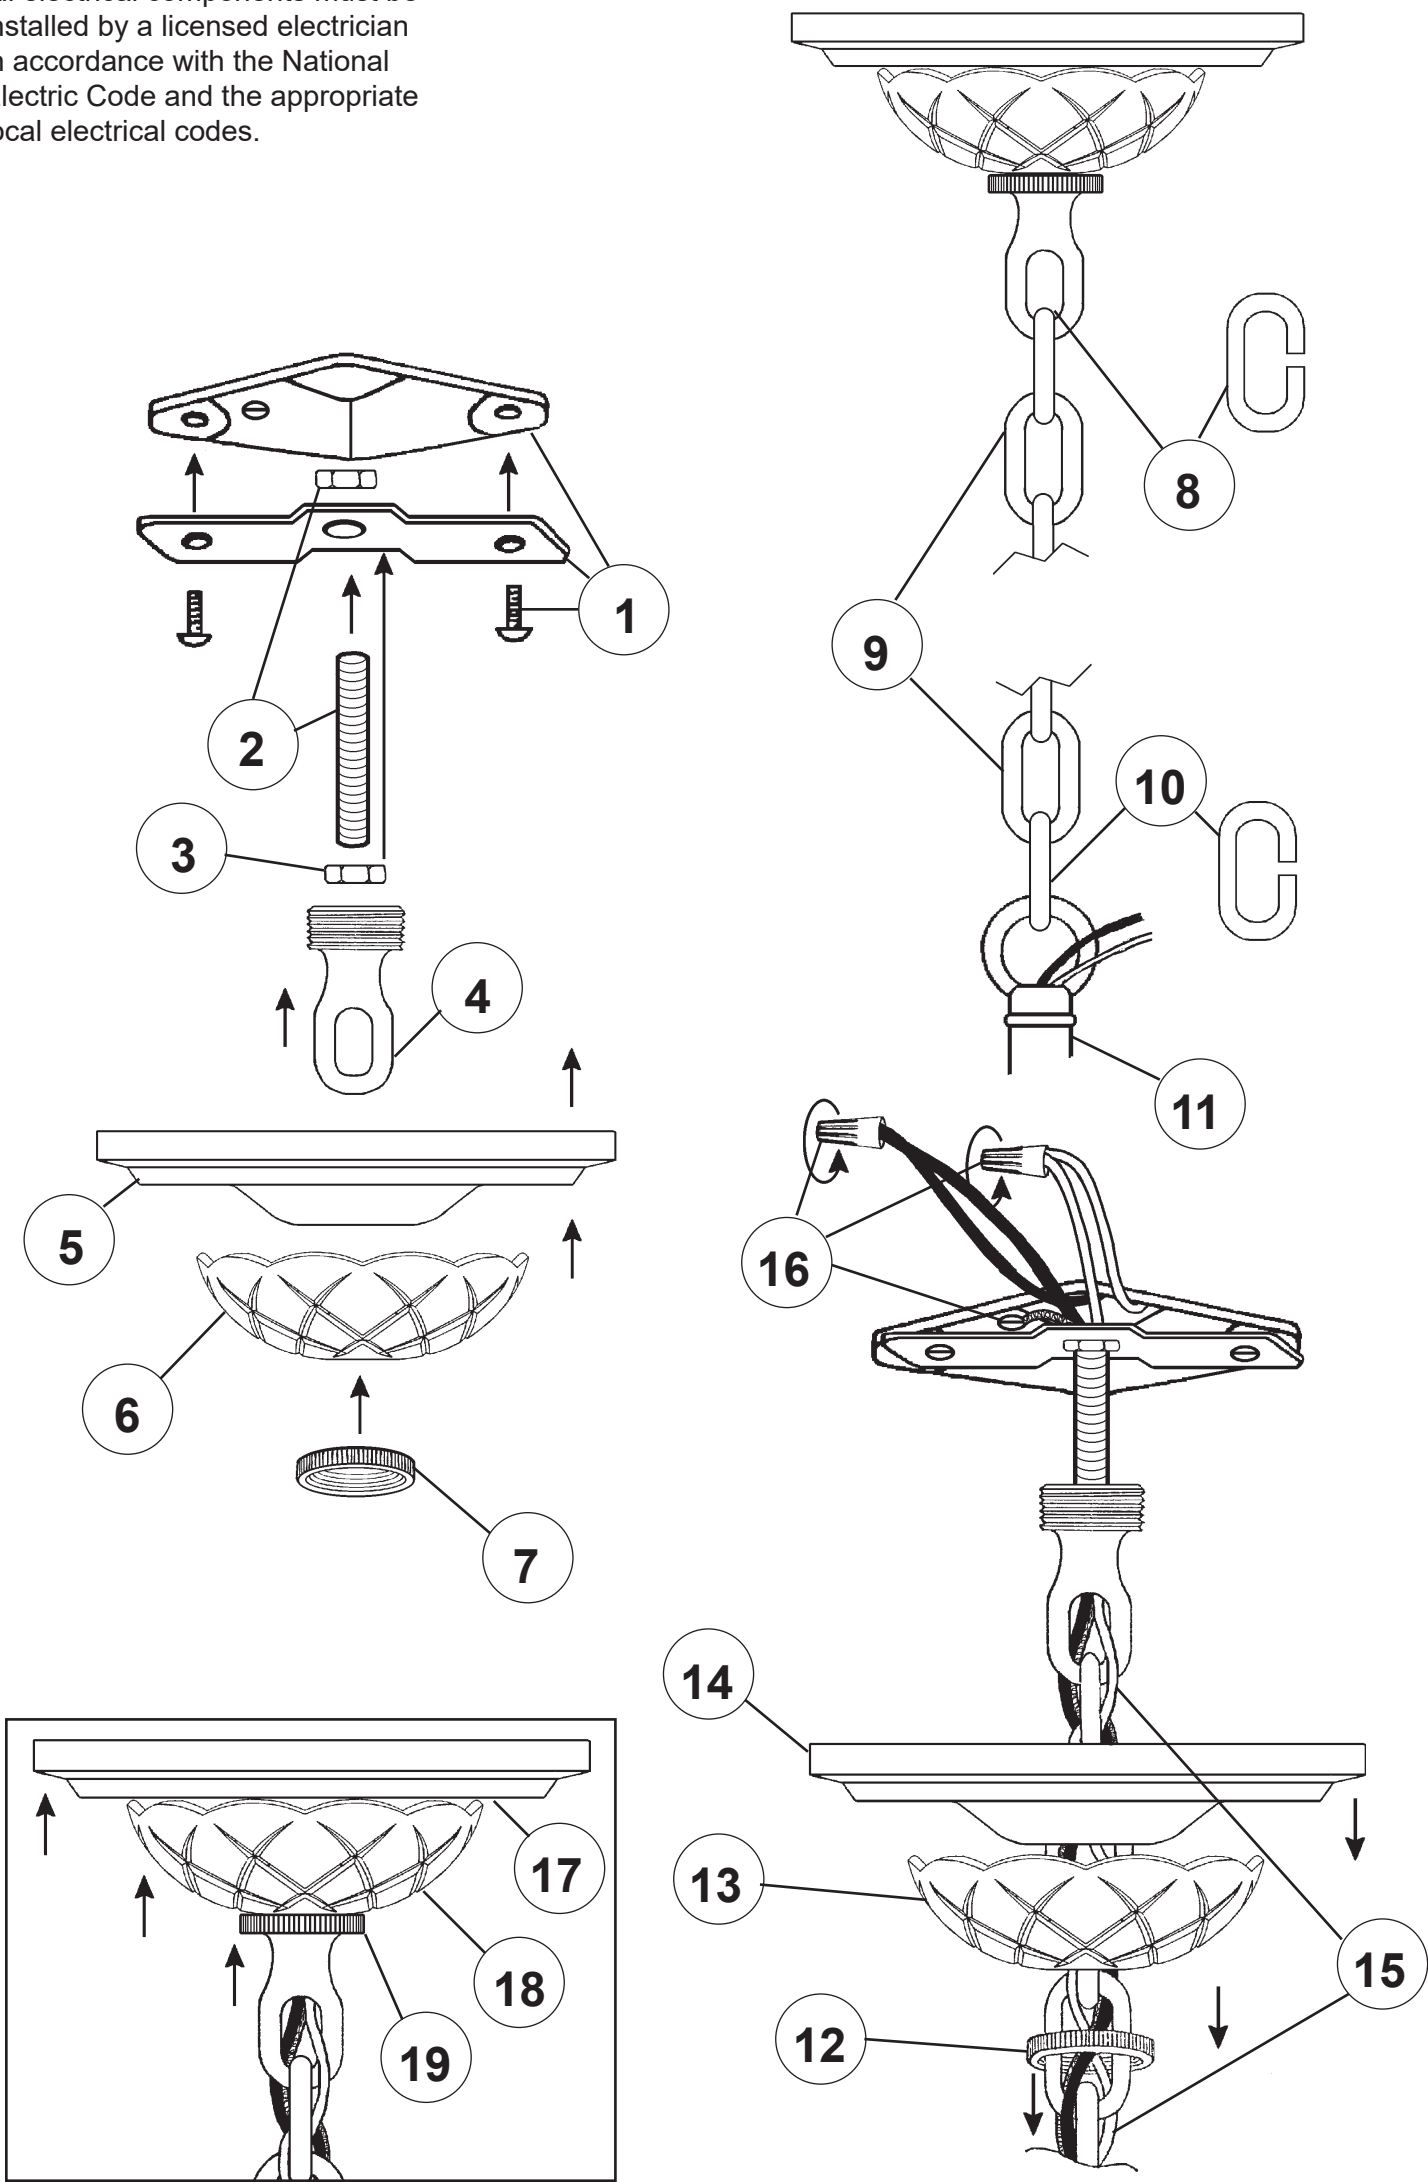



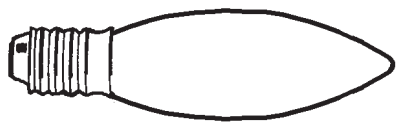



21

You will need 12 - B10
25 Watts Recommended
60 Watts Max

Install bulbs and be sure
to test fixture **BEFORE**
trimming.

CAUTION: Glass parts are fragile.
To avoid breakage use care when
assembling or cleaning.

**WHEN ORDERING REPLACEMENT
ARM(S):**
| Give arm number from trim diagram
| Give color code from the arm itself

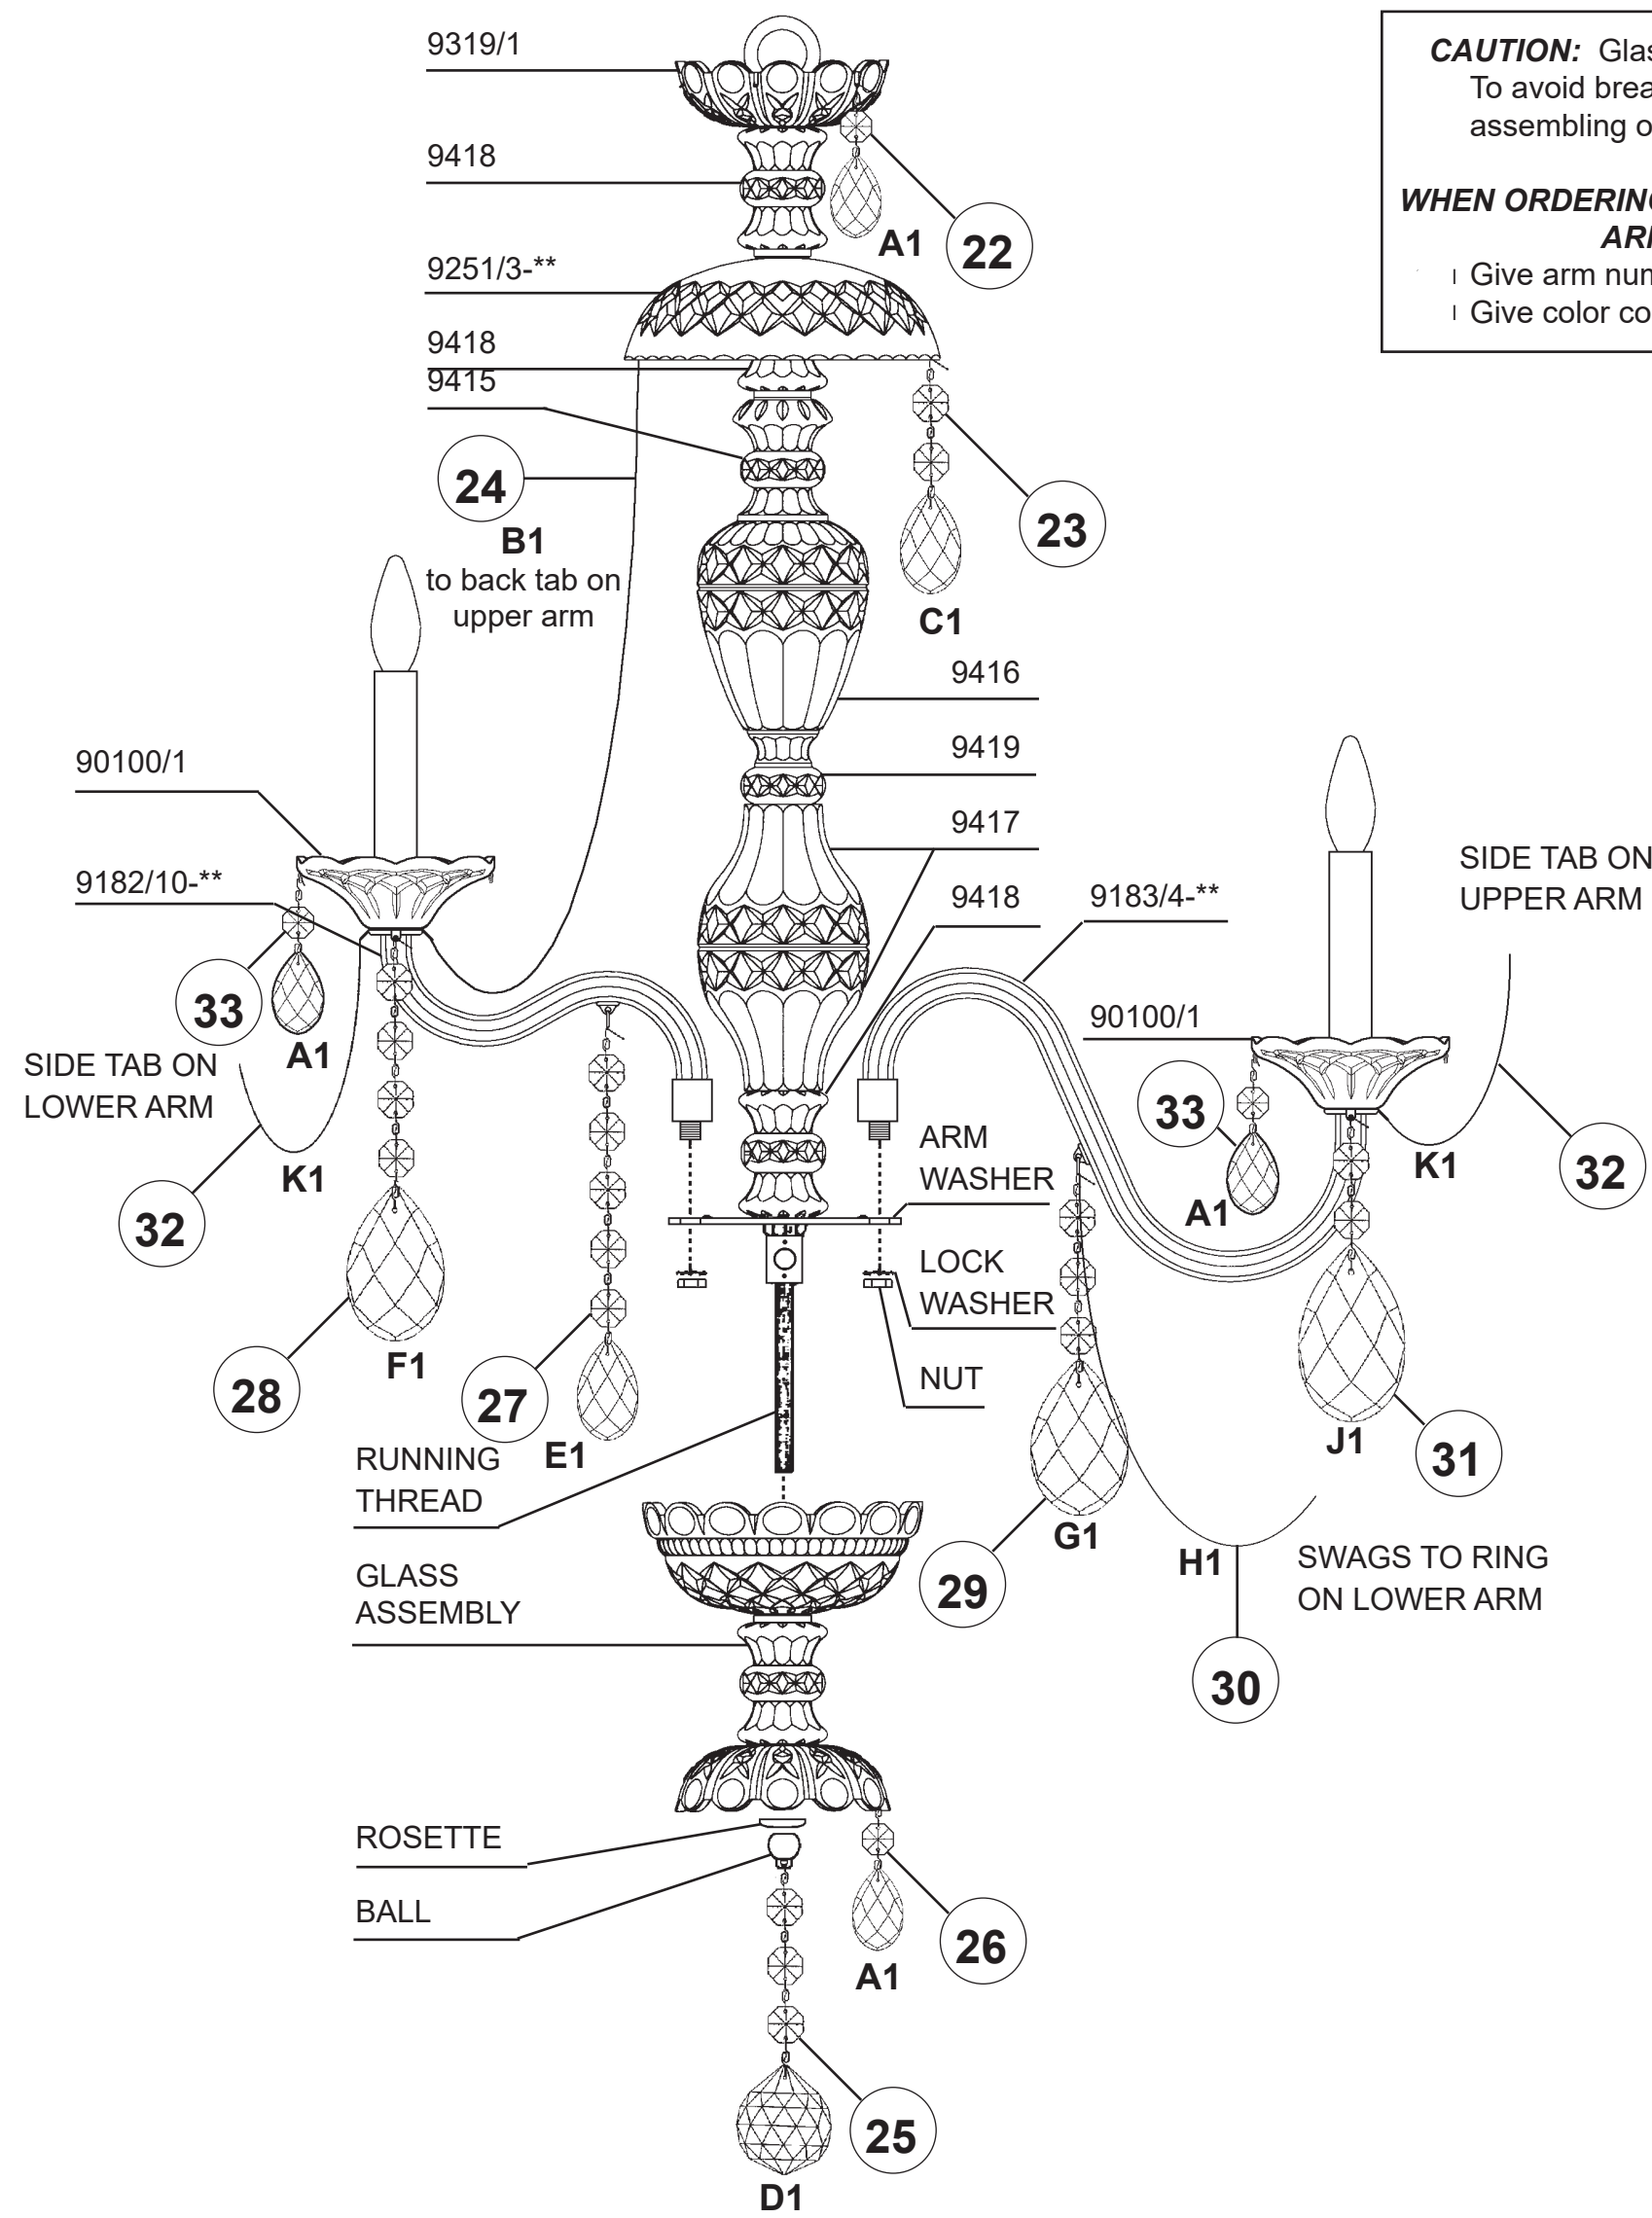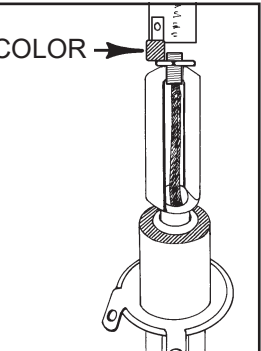

20 Install running thread and lock with set
screw. ALTERNATELY install two different arms
into washer. Line up holes in arms with dimple in
washer. Use lock washer and nut to secure arms
in place.
Connect ground wire in each arm to ground wire
in center column. **NO MORE THAN 5-WIRES
PER WIRE NUT.** Use electrical tape to secure
wire nuts.
Connect white arm wires to neutral column wire
(ribbed or marked is neutral).
Connect black arm wires to the power wire in
column.
Carefully press wires as close as possible to the
underside of washer.
Attach glass assembly with rosette and ball.

