



| | | |
|----------------|--|--------------|
| LOCATION | | DATE |
| PREPARED BY | | QUANTITY |
| COMMENTS | | FIXTURE TYPE |
| CATALOG NUMBER | | |

Anton LED Flush Mount ANF Series

Features

This modern single drum design provides a dramatic look and features Lumafuse™ laminated fabric/acrylic shade. White bottom acrylic diffuser disperses the light.



Construction

The canopy is made of 22-gauge cold rolled steel. The LED pan is white painted. The acrylic diffuser is supported by the inner shade. Power supply connections must be made inside a junction box (not included).

Finish

Stamped metal components are paintable white baked gloss enamel.

Diffuser

Utilizing Lumafuse™ laminated fabric to acrylic. Available in Jute and Linen White. Matte white acrylic bottom lay-in diffuser.



Electrical

Input 120-277 VAC 60 HZ.
Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers.
TRIAC and ELV dimming only at 120VAC.

3in1 color temperature
3000K/3500K/4000K

LED

Integrated LED modules capable of producing:
12" - 18W - 1400 source lumens
15" - 30W - 2400 source lumens
19" - 42W - 3200 source lumens
Adjustable Choice 3000K, 3500K, 4000K (CCT).
Rated for 50,000 Hrs., 90 CRI.



Jute

Linen White

Certification

cETLus listed for indoor damp locations
*Title 24/JA8 Compliant


Options (Consult Factory)

Semi-flush mount
Battery back-up

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions
subject to change without notice.

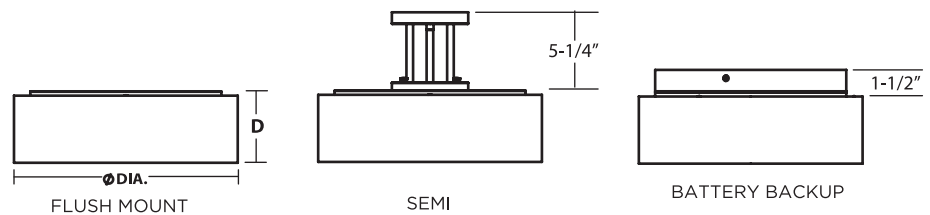

Ordering Information:

| Jute | Linen White | LED | Source Lumens | Adjustable CCT | DIA. | D |
|-----------------|------------------|-----|---------------|-------------------|---------|--------|
| ANF1214LAJUD-JT | *ANF1214LAJUD-LW | 18W | 1400 | 3000K/3500K/4000K | 12-1/4" | 4-3/4" |
| ANF1524LAJUD-JT | *ANF1524LAJUD-LW | 30W | 2400 | 3000K/3500K/4000K | 15" | 5-1/2" |
| ANF1932LAJUD-JT | *ANF1932LAJUD-LW | 42W | 3200 | 3000K/3500K/4000K | 19-1/4" | 5-1/2" |