



Capri LED Flush Mount CFF Series

Features

Shallow euro styled ceiling or wall mount fixture available in four diameters and can be used in various applications including corridors and baths. Fixture mounts to standard junction box (not included).

Construction

Housing is spun 22-gauge steel. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Finish

Interior housing is finished in lighting grade white baked gloss enamel paint. Exposed exterior ring is available in two finish options, white or brushed nickel.

Diffuser

Diffuser is .05" thick injection molded smooth white acrylic that is held in place by a lift and shift motion and secured with three spring clips.

Electrical

This unit is direct wired with constant current low voltage electronic LED drivers. The constant current LED driver is rated for up to 36W with a constant voltage of 120 VAC/60 Hz. and is dimmable down to 10% with a 150W 2-wire (Triac) or electronic low voltage (ELV) dimmer. (Fixtures with the larger lumen package utilize (2) LED drivers.)

Lamping

12W LED module producing 1100 source lumens
 17W LED module producing 1600 source lumens
 27W LED module producing 2400 source lumens
 35W LED module producing 3100 source lumens
 2700K or 3000K (CCT). Rated for 50,000 Hrs. 90 CRI

Certification

All fixtures are cETLus listed for damp locations.
 ENERGY STAR® qualified
 Title 24/JA8 Compliant

Options

120-277V Universal-Voltage driver

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.


Specifications and dimensions

subject to change without notice.

Ordering Information:

White	Brushed Nickel	LED	Source Lumens	CCT	Dia.	D
CFF091100L27D1WH	CFF091100L27D1BN	12W	1100	2700K	9-9/16"	2-3/8"
CFF091100L30D1WH	CFF091100L30D1BN	12W	1100	3000K	9-9/16"	2-3/8"
CFF111600L27D1WH	CFF111600L27D1BN	17W	1600	2700K	11"	3"
CFF111600L30D1WH	CFF111600L30D1BN	17W	1600	3000K	11"	3"
CFF142400L27D1WH	CFF142400L27D1BN	27W	2400	2700K	14"	3-7/16"
CFF142400L30D1WH	CFF142400L30D1BN	27W	2400	3000K	14"	3-7/16"
CFF193100L27D1WH	CFF193100L27D1BN	35W	3100	2700K	19"	4-3/16"
CFF193100L30D1WH	CFF193100L30D1BN	35W	3100	3000K	19"	4-3/16"

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

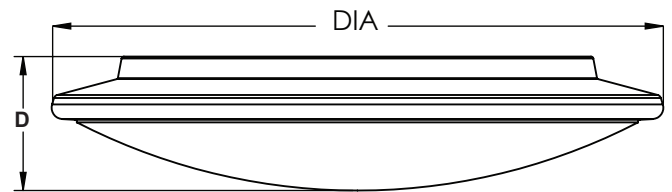

Wall Dimmer Compatibility Chart

Product can be dimmed to 10% of full scale using a standard two-wire dimmer.

Brand	Model #
Leviton®	6674-POW
Lutron®	CTCL-153P, DVCL-153P