



| | | |
|----------------|--|--------------|
| LOCATION | | DATE |
| PREPARED BY | | QUANTITY |
| COMMENTS | | FIXTURE TYPE |
| CATALOG NUMBER | | |

Carter LED Flush Mount CSF Series

Features

Low profile, soft edged square cloud ceiling mount fixture available in four sizes and can be used in various applications including baths and kitchens. Fixture mounts to standard junction box (not included).

Construction

Housing is die-formed of 22-gauge steel. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Finish

Back plate is finished in lighting grade white baked gloss enamel paint.

Diffuser

Diffuser is .07" thick vacuum formed smooth white acrylic that is secured by plastic latches.

Electrical

This unit is direct wired with constant current low voltage electronic LED drivers. The constant current LED driver is rated for up to 36W with a constant voltage of 120 VAC/60 Hz. and is dimmable down to 10% with a 150W 2-wire (Triac) or electronic low voltage (ELV) dimmer.
(Fixtures with the larger lumen package utilize (2) LED drivers.)

Lamping

12W LED module producing 1100 source lumens
17W LED module producing 1600 source lumens
27W LED module producing 2400 source lumens
35W LED module producing 3100 source lumens
2700K or 3000K (CCT). Rated for 50,000 Hrs. 90 CRI

Certification

All fixtures are cETLus listed for damp locations.
ENERGY STAR® qualified

Options

120-277V Universal-Voltage driver


Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions
subject to change without notice.

Ordering Information:

| White | LED | Source Lumens | CCT | Dia. | D |
|----------------|-----|---------------|-------|------|--------|
| CSF101100L27D1 | 12W | 1100 | 2700K | 10" | 2-1/2" |
| CSF101100L30D1 | 12W | 1100 | 3000K | 10" | 2-1/2" |
| CSF121600L27D1 | 17W | 1600 | 2700K | 12" | 2-1/2" |
| CSF121600L30D1 | 17W | 1600 | 3000K | 12" | 2-1/2" |
| CSF142400L27D1 | 27W | 2400 | 2700K | 14" | 2-1/2" |
| CSF142400L30D1 | 27W | 2400 | 3000K | 14" | 2-1/2" |
| CSF193100L27D1 | 35W | 3100 | 2700K | 19" | 2-1/2" |
| CSF193100L30D1 | 35W | 3100 | 3000K | 19" | 2-1/2" |

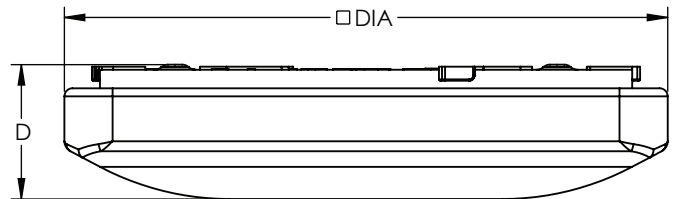

Wall Dimmer Compatibility Chart

Product can be dimmed to 10% of full scale using a standard two-wire dimmer.

| Brand | Model # |
|----------|----------------------|
| Leviton® | 6674-POW |
| Lutron® | CTCL-153P, DVCL-153P |