



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

LED Cloud LCL Series

Features

This clean appearance, surface mounted cloud provides a wide distribution of light with a white diffuser. It can be used in various applications including offices, corridors, garages, kitchens and public spaces. Fixture mounts to standard junction box (not included).



Construction

Housing is die-formed of 22-gauge steel. Standard mounting holes are included. Power supply connections can be made inside the fixture wire way or in a junction box (not included).

Finish

Housing is finished in lighting grade white baked gloss enamel paint.

Diffuser

White acrylic diffuser.

Electrical

Input 120 VAC, 60 Hz. The LED driver is dimmable with a 2-wire (TRIAC) or electronic low voltage (ELV) dimmer switch.

LED

Integrated LED modules capable of producing:
 36W = 3000 source lumens
 52W = 4100 source lumens
 60W = 5000 source lumens
 Adjustable Choice 3000K or 4000K (CCT).
 Rated for 50,000 Hrs., 90 CRI.


Certification

All fixtures are cETLus listed for damp locations.
 ENERGY STAR® Qualified
 *Title 24/JA8 Compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions subject to change without notice.

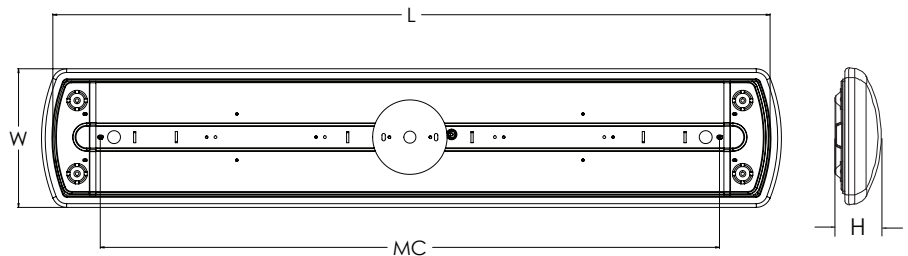

Ordering Information:

White	LED	Source Lumens	Adjustable CCT	L	W	H	MC
LCL3000LAJD1	36W	3000	3000K/4000K	49-3/4"	9-3/8"	3-1/4"	41-1/2"
LCL4100LAJD1	52W	4100	3000K/4000K	49-3/4"	9-3/8"	3-1/4"	41-1/2"
LCL5000LAJD1*	60W	5000	3000K/4000K	49-3/4"	9-3/8"	3-1/4"	41-1/2"