



Vera Task Lighting VRAU Series

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Features

The VRAU Series low profile make it ideal for undercabinet lighting in kitchens, study area and displays. The housing is available in 5 different lengths, ranging from 9" to 40" to handle most application requirements. Linkable up to 200 watts. In addition the units can be direct wired, and attached to the cabinet with 2 captive mounting screws provide for a smoother installation. Multiple knockouts on the top and the back which offers maximum wiring flexibility.

Features:

- BX/NM cable connector
- direct connector (included)



Construction

Fixture housing is made from extruded aluminum.

Finish

All exposed metal parts are post painted white.



Diffuser

White polycarbonate.

Electrical

Input 120V 60 Hz. This product provides a user selectable switch with 3 color choices - 2700K, 3000K & 4000K CCT respectively. The fixture is dimmable with most standard 2 wire (Triac) wall dimmers or an electronic low voltage dimmer switch (sold separately).

LED


Integrated LED type SMT array, non-replaceable arrays are used to create 2700K, 3000K or 4000K color temps. Rated to 75,000 hrs. 90 CRI.

Certification

Fixtures are cULus listed for indoor damp locations and carry a UL rating for undercabinet/convertible/linkable mounting. ENERGY STAR® qualified Title 24/JA8 Compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 7 years from date-of-purchase.

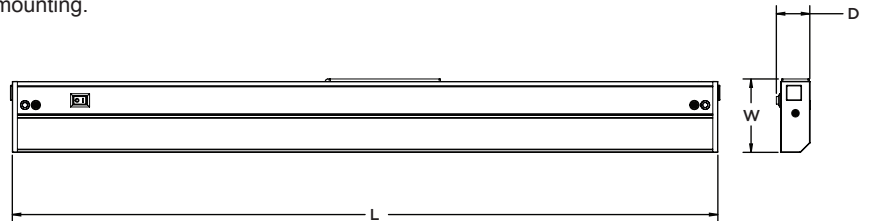


Specifications and dimensions
subject to change without notice.

Ordering Information:

Size	White	Type	Lumens			LPW	L	W	D
			2.7K	3.0K	4.0K				
9 in.	VRAU09WH	5W	290	300	295	60	9"	2-3/16"	1"
14 in.	VRAU14WH	9W	470	525	490	58.3	14"	2-3/16"	1"
22 in.	VRAU22WH	15W	820	915	865	61	22"	2-3/16"	1"
32 in.	VRAU32WH	18W	1020	1030	1000	57.2	32"	2-3/16"	1"
40 in.	VRAU40WH	23W	1315	1430	1400	62.2	40"	2-3/16"	1"

LPW based on 3000K color temperature



ACCESSORIES (ORDER SEPARATELY)

VRAC12WH	12" Interconnect cord
VRAC24WH	24" Interconnect cord
VRAC36WH	36" Interconnect cord
VRAC48WH	48" Interconnect cord
VRAC72WH	72" Interconnect cord
VRAP60WH	60" Cord & Plug
VRA-OCC	Occupancy sensor with 24" Cable