

INSTALLATION INSTRUCTIONS
675-LED Wall Sconce
WS-67514

dweLED

- CAUTION:** To prevent electrical shock, ensure electricity has been turned off at the circuit breaker before beginning.
- Read all instructions before installing.
 - System is intended for installation by a licensed electrician in accordance with the National Electrical Code (NEC) and local regulations.
 - When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.
 - Retain installation instructions for future maintenance reference.

WARNING: All parts must be used as indicated in these instructions. This product is designed for use only with the supplied parts and/or accessories designated for use by dweLED. Substitution of parts or accessories not designated for use with this product by dweLED could result in personal injury or property damage, and will void the warranty. Contact an authorized dealer or the manufacturer if any parts are damaged or missing.

MAINTENANCE NOTE: Coastal conditions may cause mineral and residue build-up on the fixture. We recommend that customers in coastal areas clean all external surfaces of the fixture once every two weeks with a wet cloth.

- MISE EN GARDE:** Pour éviter tout choc électrique, assurez-vous que le disjoncteur soit mis hors tension avant de commencer.
- Lisez toutes les instructions avant l'installation.
 - Le système doit être installé par un électricien licencié conformément au code national de l'électricité (NEC), et également aux règlements locaux.
 - Lors de la manipulation du luminaire, n'appuyez pas sur les LED. Tenez-le uniquement par la base.

ATTENTION: Toutes les pièces doivent être utilisées comme indiqué dans ces instructions. Ce produit est conçu pour être utilisé seulement avec les pièces et/ou accessoires fournis pour être utilisés avec les produits dweLED. Remplacer des pièces ou accessoires non conçus pour ce produit dweLED pourrait causer des dommages corporels ou matériels et pourrait également causer l'annulation de la garantie. Veuillez contacter un revendeur autorisé ou le fabricant si des pièces manquent ou sont endommagées.

NOTE D'ENTRETIEN: Les conditions côtières peut causer une accumulation de minéraux et de résidus sur le luminaire. Nous recommandons aux clients qui résident dans les zones côtières de nettoyer toutes les surfaces externes du luminaire une fois toutes les deux semaines avec un chiffon humide.

HARDWARE

			
Wire Connector Qty: 3pcs+1 Extra	Mounting Screw Qty: 1 Extra	Wood Screw Qty: 2pcs+1 Extra	Plastic Anchor Qty: 2pcs+1 Extra

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Ave
Ontario, CA 91761



INSTALLATION INSTRUCTIONS

675-LED Wall Sconce

WS-67514

dweLED

Fig.1 MOUNTING ON JUNCTION BOX


PREPARATION

1. Shut off the power at the circuit breaker and remove existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.

MOUNTING THE FIXTURE

MOUNTING ON JUNCTION BOX (Fig.1)

3. Remove mounting screws (B) from fixture shown in Fig 1 then remove backplate.(Fig 1).
4. The lamp can switch between four color temperatures (2700K-3000K-3500K-4000K), which can be adjusted to your preference with the switch in the canopy (Fig.3).
Note: The switch comes with a detachable switch cover, remove the switch cover prior to adjusting the color temperature, reattach the switch cover after adjustment is made.
5. Drill holes in the wall aligned with the key-hole located in the mounting plate insert the plastic anchor(D) to the wall.
6. Secure the backplate plate to the junction box using standard junction box screws that comes with the junction box. Fasten the backplate plate to the wall using the wood screw(C).
Note: (i)using any other non-original-manufacturer provided junction box screw may result in safety issue;
(ii) The side of the mounting ring marked"GND"must face out.
7. Connect the driver's input wires to junction box wires as shown (Fig. 4). Make sure that all wire connectors (A) are secure. If your outlet junction box has a green or bare copper ground wire, connect the driver's ground wire to it. Otherwise, connect the fixture's ground wire directly to the back plate using the GND screw provided. After wires are connected, tuck them carefully inside the junction box.
8. Secure the fixture to the backplate plate using the mounting screw (B).

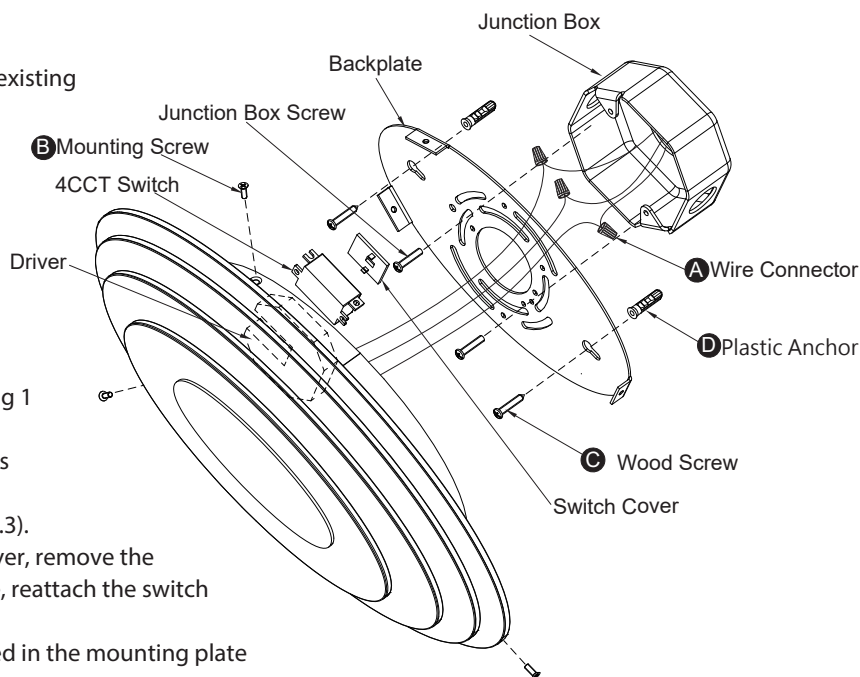

Back Plate Dimensions

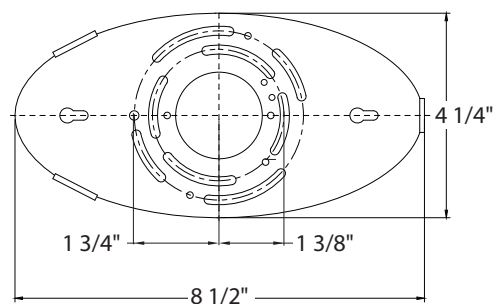


Fig. 3 Switch

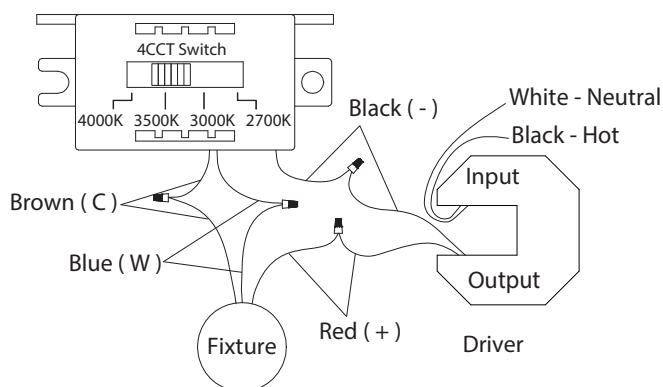


Fig. 4 Switch



Fixture Wires Black or Smooth	House Wires Black (Hot)
Fixture Wires White or Ribbed	House Wires White (Neutral)
Fixture Wires Bare wire (Ground)	House Wires Green or Bare Copper (Ground)

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Ave
Ontario, CA 91761

