

## TP20003ASL INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

### CAUTION

**WARNING:** Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.


### GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.


Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

### ASSEMBLY AND INSTALLATION

- Determine the desired hanging height by attaching stems (11, 12, 13, 14, 15) to the fixture body (16).
- Feed fixture wires through stems (11, 12, 13, 14, 15). Connect stems (11, 12, 13, 14, 15) to the fixture body (16) and turn clockwise until tight.
- Connect canopy (9) to the stem (11) and turn clockwise until tight.
- Pull out the outlet wire and ground wire from the outlet box (1). Make wire connections.
  - Ribbed wire (w/o marking) from light to White wire (4) from power source.
  - Smooth wire (w/o marking) from light to Black wire (3) from power source.
  - Loop the ground wire (2) to mounting plate (7) with a ground screw (6).
- Attach the mounting plate (7) to the outlet box (1) using mounting screws (8).
- Tuck wire connections into the outlet box. Place the canopy (9) over the mounting plate (7) and secure it with the ball nut (10).
- Install bulb: (bulb not included)  
(Do not exceed the maximum capacity recommended on the socket).

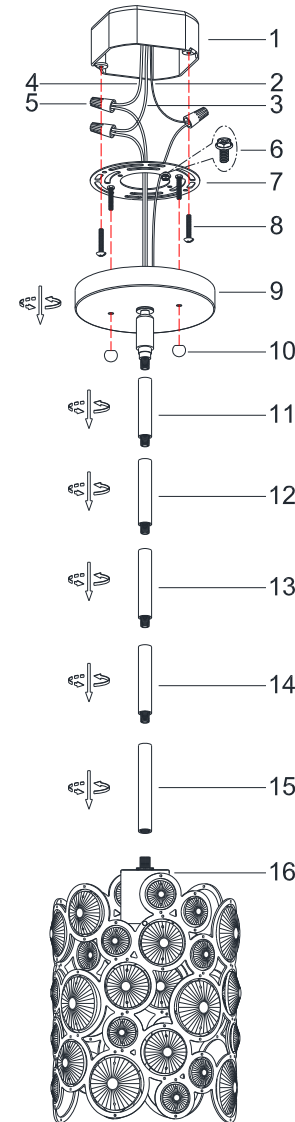

- OUTLET BOX
- GROUND WIRE
- BLACK WIRE
- WHITE WIRE
- WIRE CONNECTOR
- GROUND SCREW
- MOUNTING PLATE
- MOUNTING SCREW
- CANOPY
- BALL NUT
- STEM
- STEM
- STEM
- STEM
- STEM
- FIXTURE BODY



Extra crystals are provided for replacement

INSTALLATION IS NOW COMPLETED