

## TF70075 INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

## **CAUTION**

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

## **GENERAL**

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.


Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

## ASSEMBLY AND INSTALLATION

- 1. Open the legs (11) to the proper position.
- 2. Line up the open slots on bottom cover (08) with legs (11), and secure it with screws (09).
- 3. Line up the open slots on top cover (06) with legs(11).
- 4. Attach the bottom nipple under the socket into the center coupling.
- 5. Line up the open slots on cap cover (13) to legs (11), and secure with ball nut (12).
- 6. Raise the harp caps on harp (04) and insert the bottom ends of harp (04) into saddle (05).
- 7. Lower the harp caps on harp (04) until they cover the two-pronged saddle (05).
- 8. Unscrew the finial (01) from the top of harp (04).
- 9. Place shade (03) over the harp (04) making sure the harp top extends through the top ring of shade (03), and secure shade (03) with top cap (02) and finial (01).
- 10. Install bulb (not included).

DO NOT EXCEED THE WATTAGE RECOMMNEDED ON SOCKETS

INSTALLATION IS NOW COMPLETE

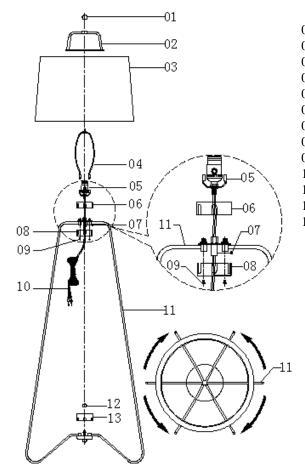

- 01. FINIAL
- 02. TOP CAP
- 03. SHADE
- 04. HARP
- 05. SADDLE
- 06. TOP COVER
- 07. LOCK SCREW
- 08. BOTTOM COVER
- 09. SCREW
- 10. POWER CORD
- 11. LEG
- 12. BALL NUT
- 13. CAP COVER