


PRODUCT NAME: Flute 35-LT LED Pendant
ITEM NUMBER: E10017

Please consult your electrician for hanging fixture and wiring.


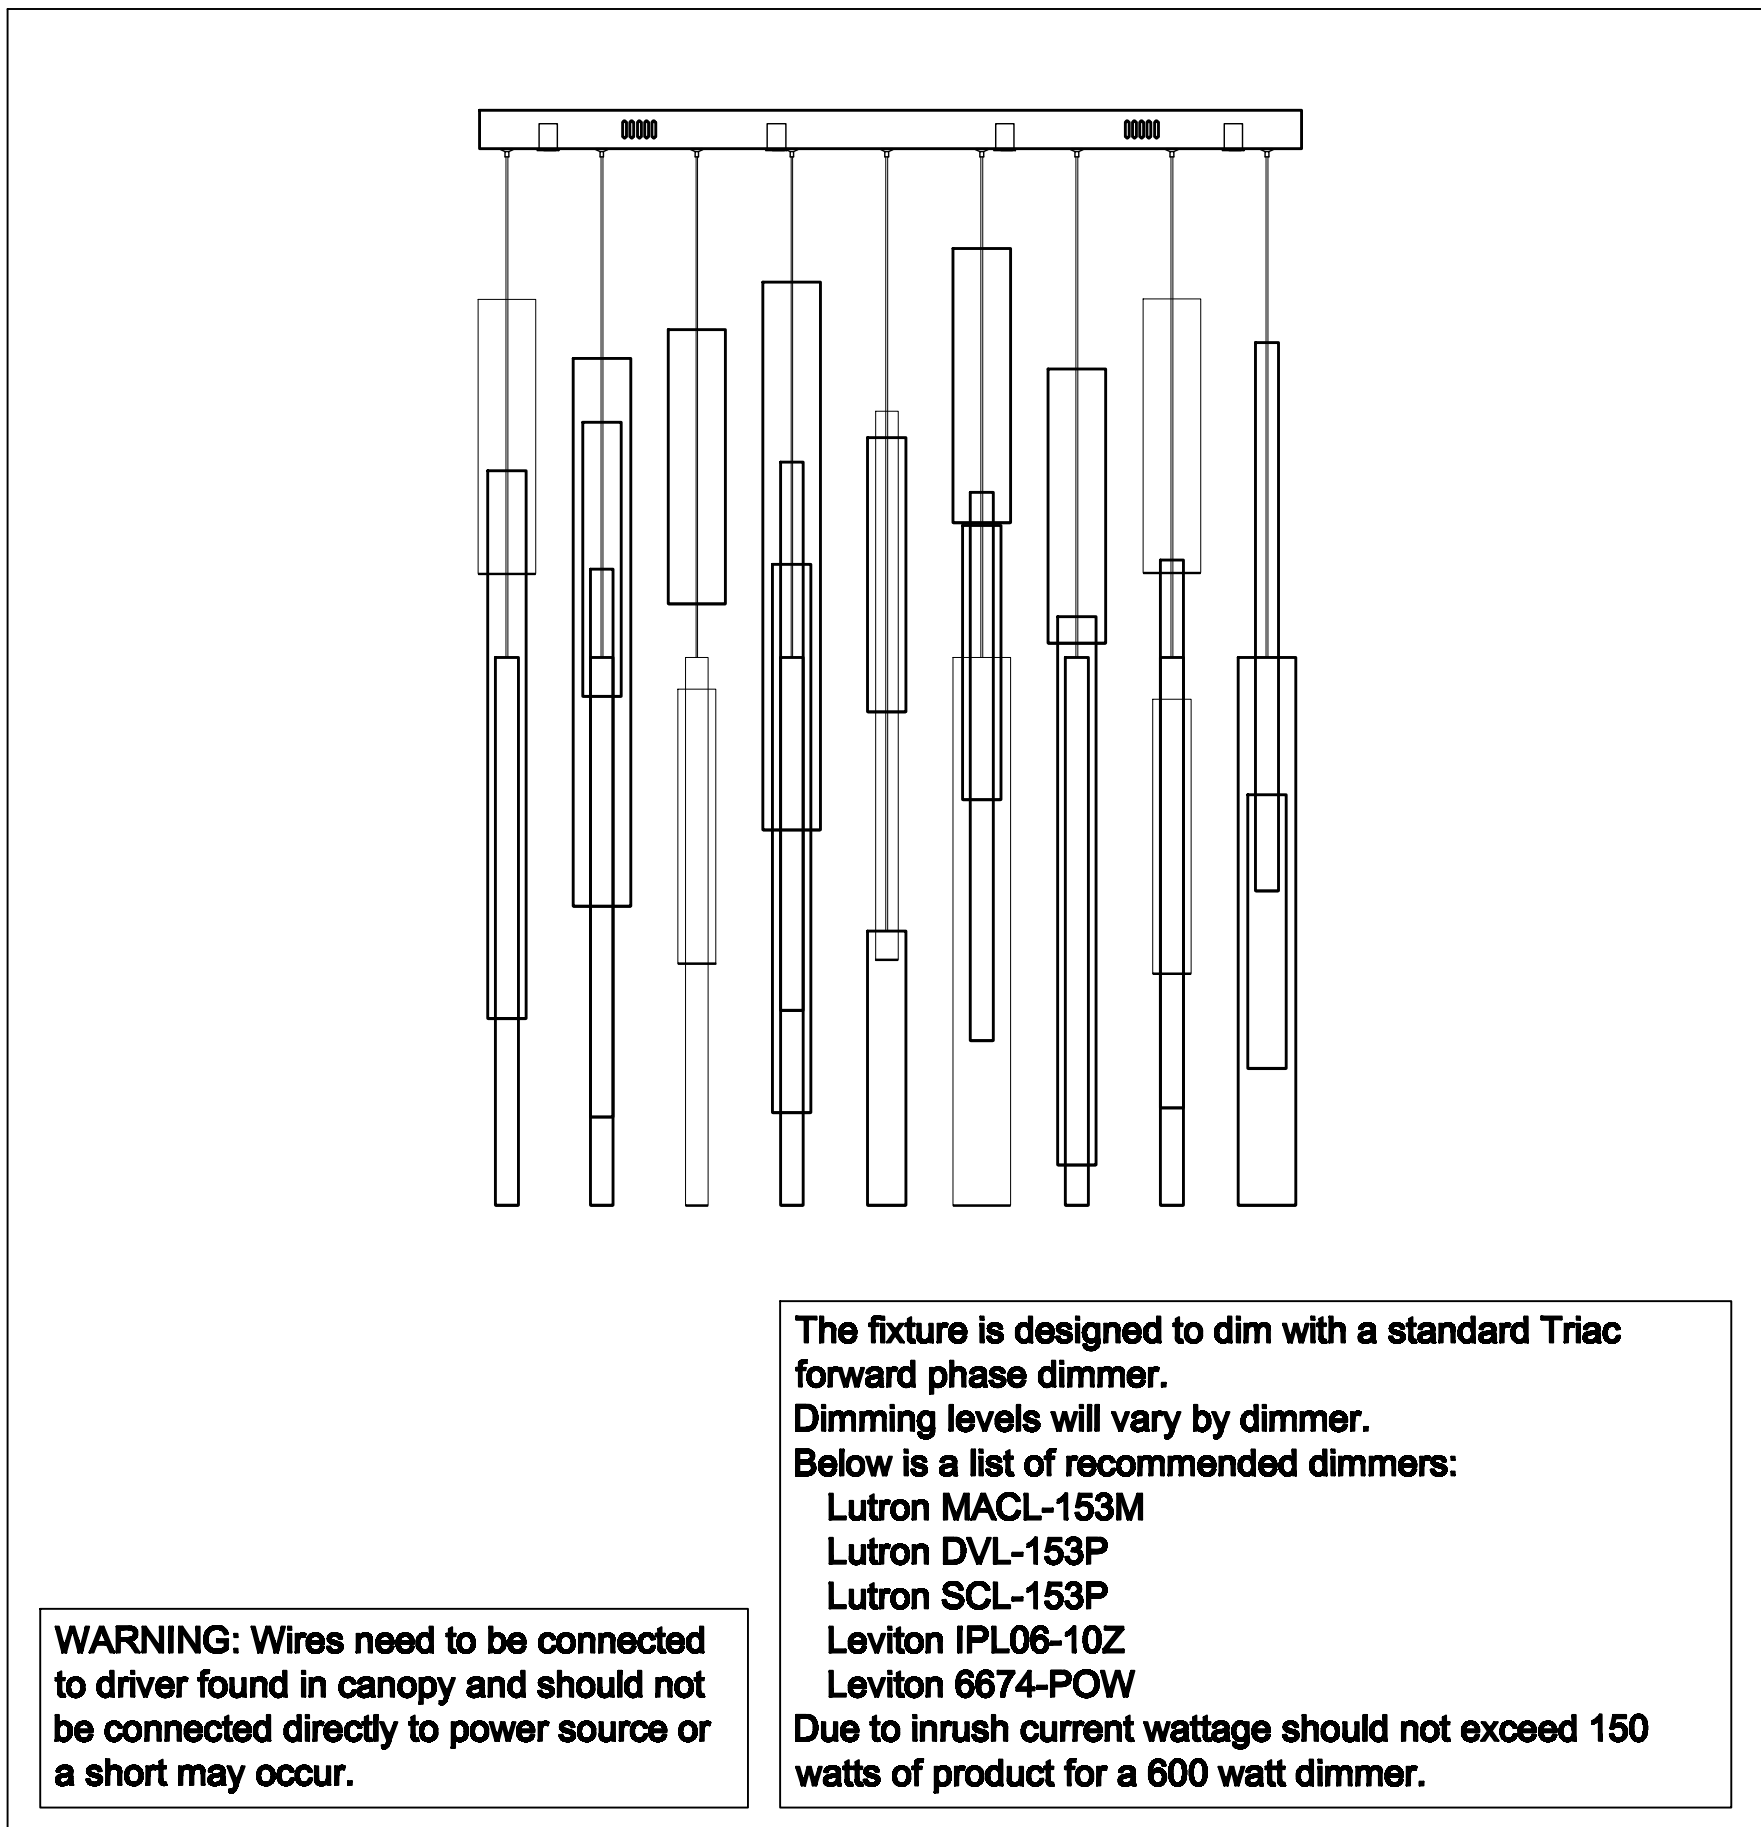


WARNING: Wires need to be connected to driver found in canopy and should not be connected directly to power source or a short may occur.

The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer. Below is a list of recommended dimmers:
Lutron MACL-153M
Lutron DVL-153P
Lutron SCL-153P
Leviton IPL06-10Z
Leviton 6674-POW
Due to inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.

Bulbs (integrated): LED 119W

IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation





Screws*6PCS


Bracket

Mounting Screws*6PCS


Locate all hardware & components before discarding packaging

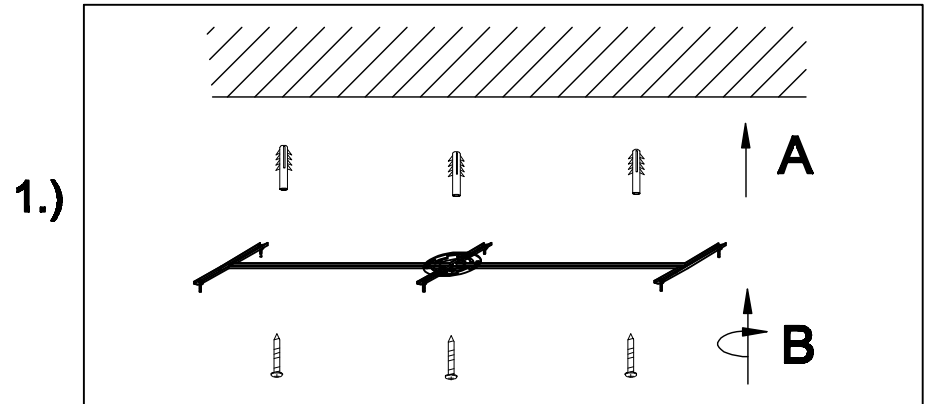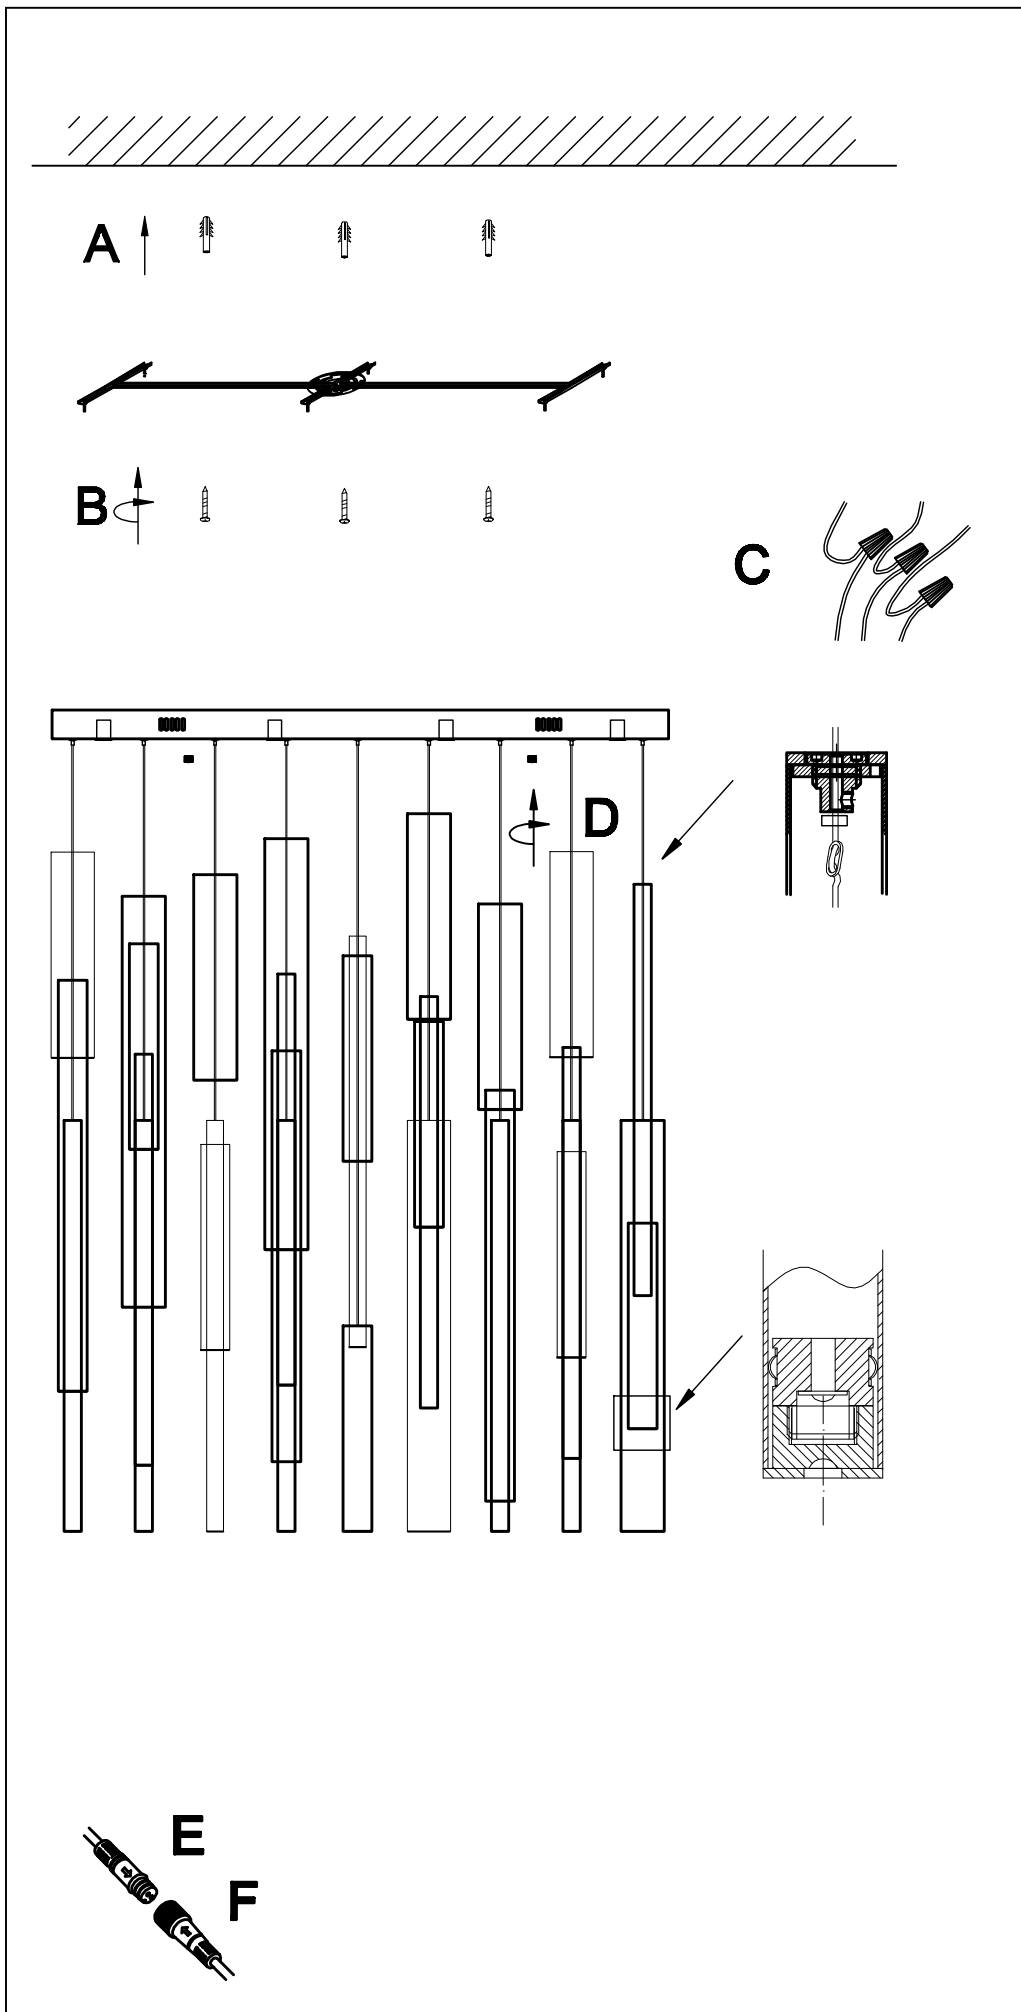


Step 1: Remove mounting bracket from fixture and install to electrical box.

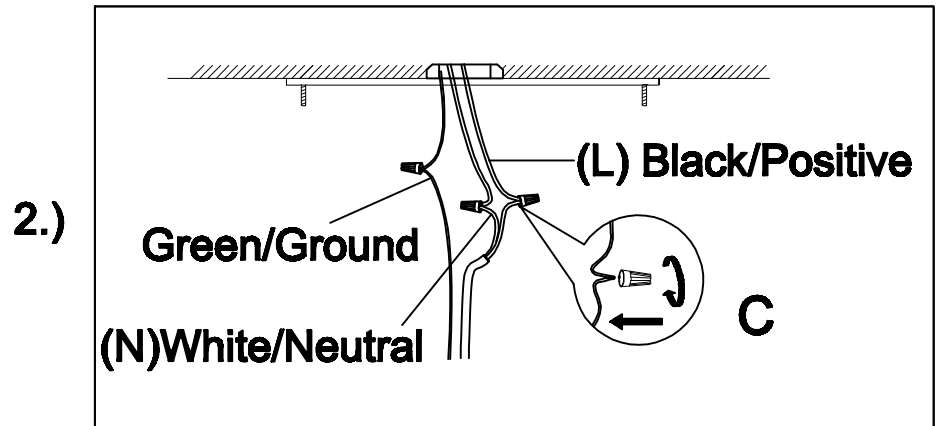

Step 2: Adjust wires to desired mounting height. Wire fixtures to wire in outlet box. Refer to dual plastic wire instructions to connect low voltage wire to driver.

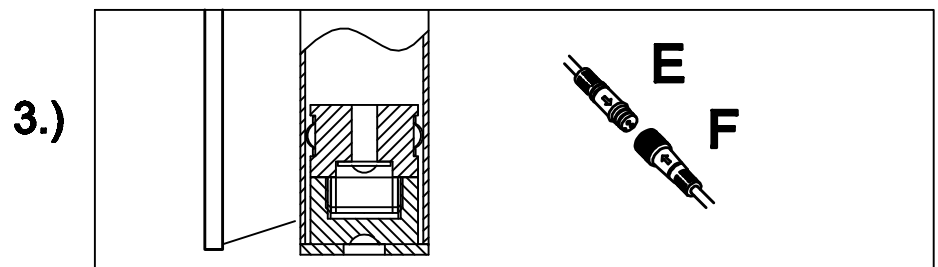


Run the wire through the tube and plug in (E) and (F) following the direction of written on the plug.

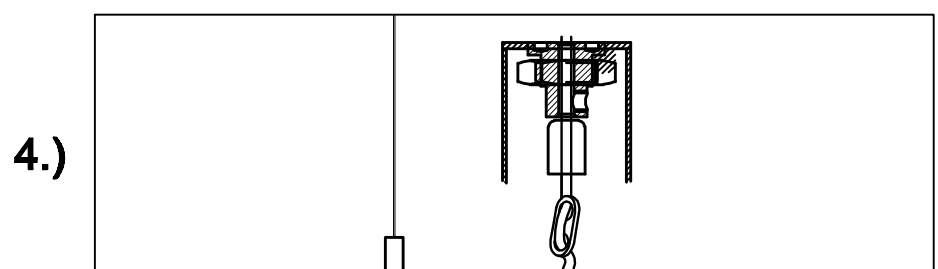


Tighten the top lid on the tube using the fork tool provided until flush.

Cleaning & Care:
You may use talcum powder and a soft cloth for cleaning. Do not use abrasive cleaner.

Please follow tube position as drawing arrangement

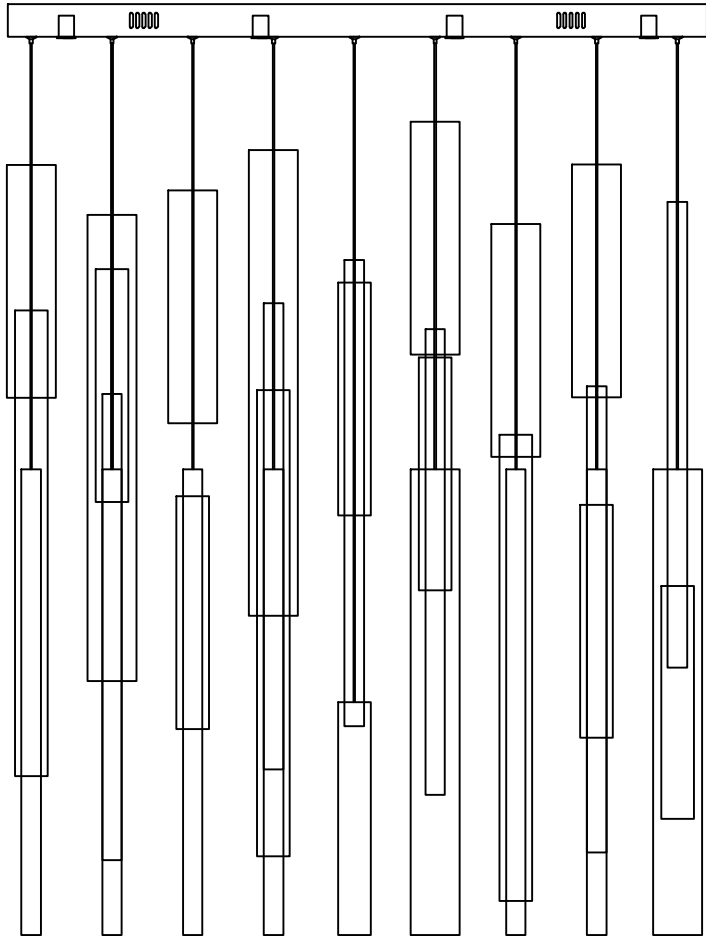

Upward View

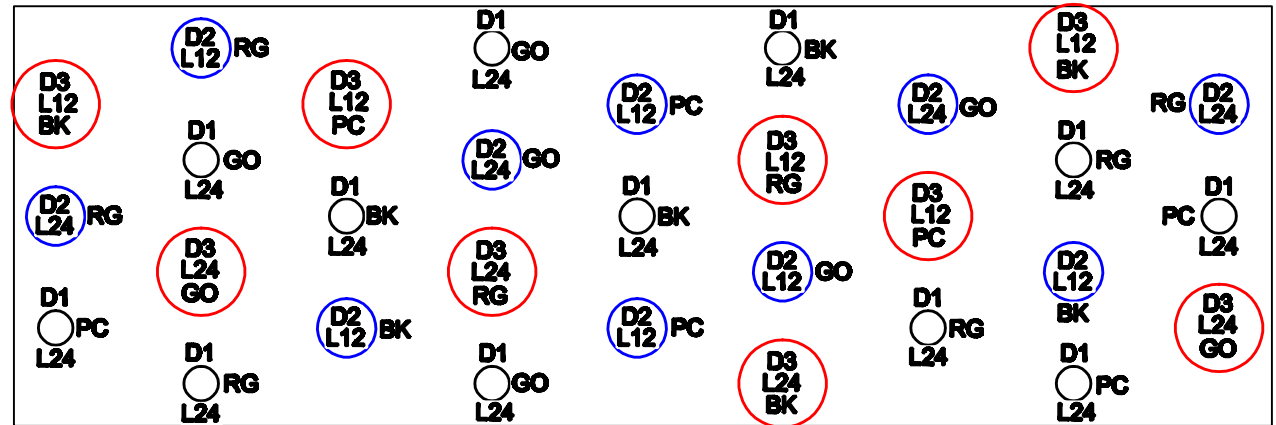

GO - Golden

RG - Rose golden

PC - Chrome

BK - Black

Please check the number wire and tube to find correct pipe for install.

D1 = Thin = $\phi 1'' = 1W$


D2 = Medium = $\phi 1.75'' = 4W$

D3 = Wide = $\phi 2.5'' = 7W$


L12=L12"

L24=L24"

Pendant Wires

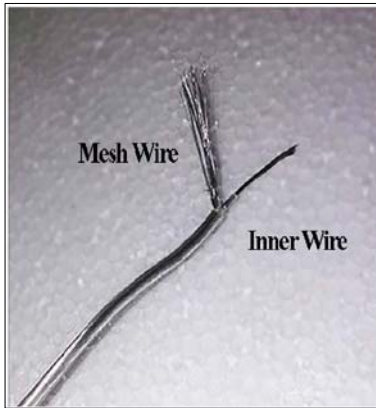

Driver Wires

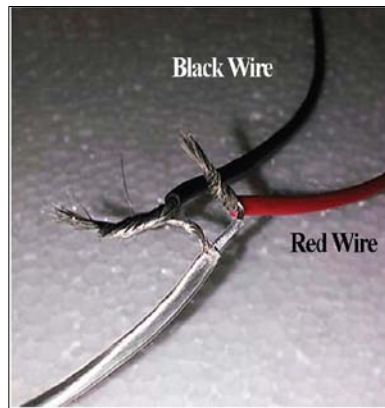

Pendant	Driver
Inner Wire (+)	Driver Red (+)
Outer Mesh (-)	Driver Black (-)

If wires are cut in the process of adjusting the height, please note the pendants consist of an outer mesh wire(ground) and inner(live) wire that must be separated before re-joining with the driver output wires. Pendant are wired in series to the drivers, as shown below

LED-D50V-350 LED-D50V-350 LED-D50V-350 LED-D50V-700 LED-D50V-700

