

# Installation manual for: 2105D24C/RC

Dimensions :D24"\*H14.5" L6  
Collection :Metro  
Bulb Type : E12 bulb, not include bulb  
Lamp Frame Weight : 8.65 LBS  
Total Weight :14.67 LBS



Thank you for choosing our exquisite products. We are providing the finest quality crystal products for our customers. Our master designers and craftsmen intend to give a professional insight on lighting design and product quality. Prompt and efficient services are our priority. We enclosed detailed instructions on how to install your light fixture properly. Please read all instructions carefully and thoroughly. If you have any questions, our professional customer service team is committed to assisting you, please call our toll free HOTLINE AT:

**1-888-388-3390**



**SAFETY**

**Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.**

**CAUTION**

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 - 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for GND.
- Never install fixture on damp ceiling, the room should be dry and well ventilated.
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

**Unpack the Package**

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions, please call our Customer Service department at 1-888-388-3390. Please have model number(at the front page), where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

**Returns and Conditions of Warranty**

Returns must be pre-authorized by contacting our customer service department at the address on the reverse side. Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warranty, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.

## Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of two (2) years from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department at the address and phone number shown below. A written return authorization form will be sent to you with specific instructions.

### CUSTOMER SERVICE DEPARTMENT

500-550 E. Erie Avenue

Philadelphia, PA 19134




























Tel : 215-423-8880

Fax : 215-423-8882

## Step 1

Please use the parts list to ensure you are not missing any parts.


### 2105D24

part	picture	Description	Qty	Check list
ZA		Electrical box(not include)	1	
ZB		GND	1	
ZC		Junction Caps	3	
ZD(P01)		Mounting bracket(φ4")	1	
ZE(P08)		Canopy(φ4.72"*H1", Chrome)	1	
ZF(P10)		Knurled nut	2	
ZG		Mounting bracket screw	2	
P01		Mounting bracket(φ4")	1	
P02		Mounting bracket screw	2	
P03		M10 Hex nut	7	
P04		GND	1	
P05		M10 Lock washer	15	
P06		M10 Nipple(L0.8")	1	
P07		φ2.4" Plastic washer A	1	
P08		Canopy(φ4.72"*H1", Chrome)	1	
P09		Swivel	1	
P10		Knurled nut	2	
P11		Rod (ROD3012CH, L6")	1	
P12		M10 Nipple (L1.2")	4	
P13		Rod (ROD3012CH, L12")	2	
P14		Rod (ROD3012CH, L16")	1	
P15		Knurl washer	1	
P16		M10 Rubber gasket	22	
P17		M10 Nipple(L1.4")	1	
P18		M10 Nipple (L0.6")	6	
P19		Swivel	6	
P20		Socket cover(φ1.18"*H2.16",Iron,Chrome)	6	

Part	Picture	Description	Qty	Check list
P21		Socket	6	
P22		Rubber gasket	6	
P23		Black fabric shade	1	
P24		Metal wire box	1	
P25		M10 Hex nut	8	
P26		Cable buckle	1	
P27		M10 Hickey	1	
P28		M10 Nipple (L1")	1	
P29		Receiver bowl	1	
P30		One end thread coupling	2	
P31		Tube(4.5")	1	
P32		ø2.4" Plastic washer B	1	
P33		Metal finial	1	
P34		Flat metal ring body(ø21.5")	1	
P35		Cable tie	2	
P36		Junction caps	2	
P37		Heat shrink tubing	2	
P38		Ground screw	1	
A		RC711-4.7"	28	
B		RC711-5.5"	20	
C		RC711-6.3"	13	
D		RC711-7.1"	6	

05

# Frame Assembly Diagram

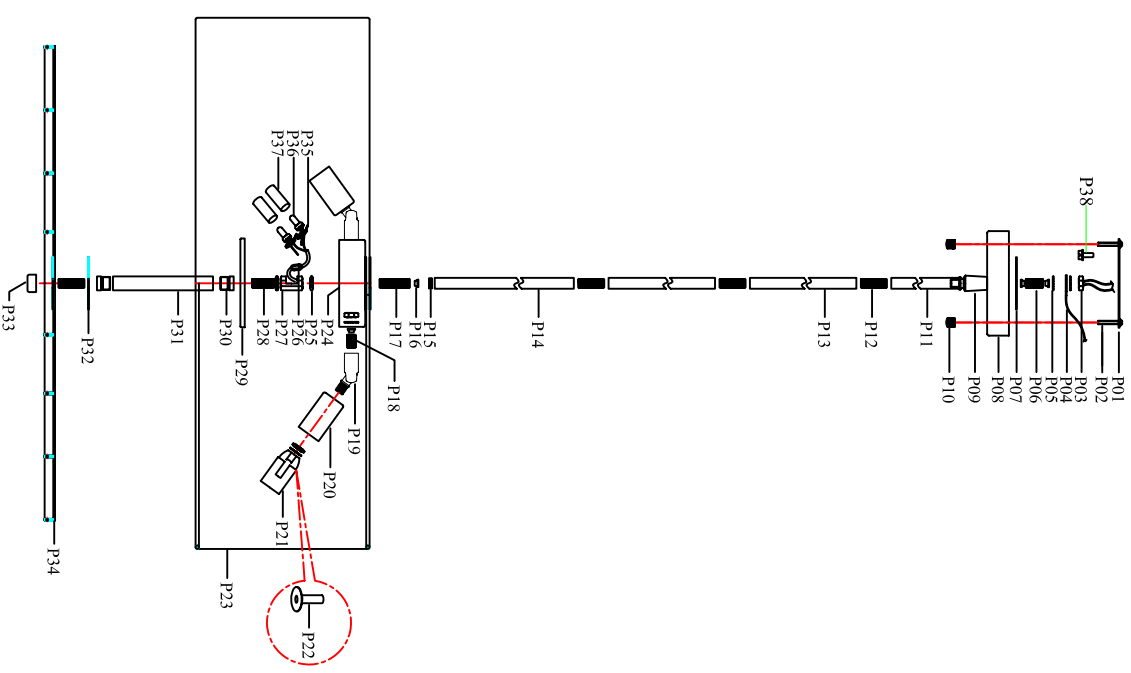

06

### Cleaning and Maintenance of Chandelier Frame

The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean soft, dry cloth. Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish. Failure to follow these instructions automatically voids the guarantee.

### Cleaning and Maintenance of Crystals

Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

### To Order Crystal Replacement Parts


Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us at the address shown on the reverse side. For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle and faxing it to our customer service department at 215-423-8882. You will be contacted with prices prior to shipment. All orders must be pre-paid.

## Step 2

**IMPORTANT:** Test sockets with bulb before dressing the fixture.

- 1 .Attach the Mounting bracket(ZD) to the electrical box(ZA).
- 2 .Pull wires up through the Junction Caps(ZC).
- 3 .Attach the Canopy(ZE) to the Ceiling panel.
- 4 .Make the electrical connections as detailed in the drawing above.


### Canopy Installation Instruction

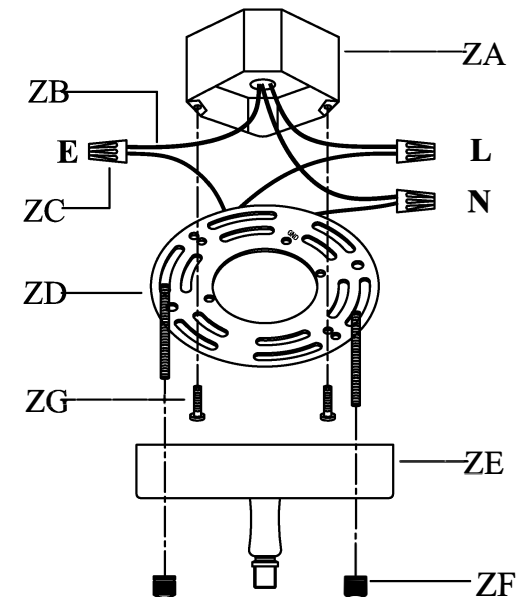

"L" = Hot wire  
 "N" = Neutral wire  
 "E" = GND

### Step 3

## Frame Assembly Instructions



Installation:

Please read all instructions carefully.


Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete.

Please note that each part has been assigned a number.

Please proceed in a numerical order.

1. Connect Rod 05 (ROD3012CH, L16") with Fabric shade(06), then fasten Rod 04 (ROD3012CH, L12")\*2, Rod 03(ROD3012CH, L6") together with Rod 05.
2. Connect Tube(07) together with Metal wire box (06) as diagram.
3. Fasten Tube(07) to the Nipple(08) of Flat metal ring body(09).
4. Connect Canopy(01) with Rod 03 together.
5. Fasten Canopy(01) on Ceiling panel use Knurled nut(02).
6. Install E12 Bulb.

The end!

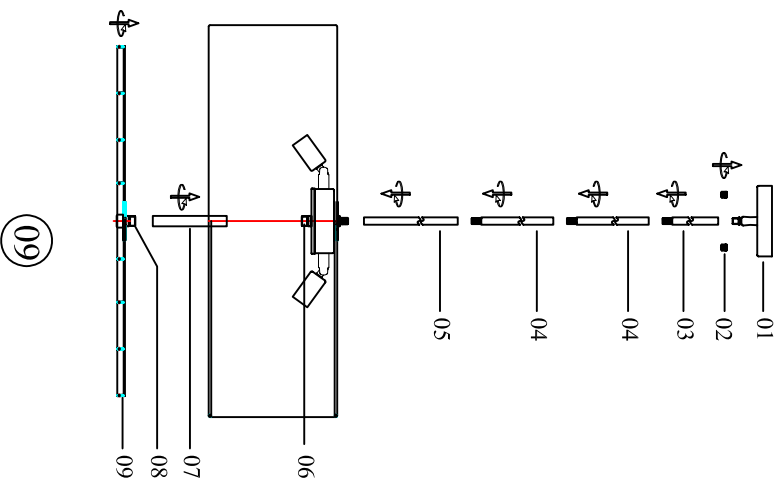

09

# Congratulations !

You are now done installing your Elegant Lighting fixture.

Sit back and admire each crystal as it will become the statement piece for your room/house.

If you require any additional assistance, please contact us at 1-888-388-3390.


Thank you.



When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

### Step 4

## Crystal Dressing Diagram

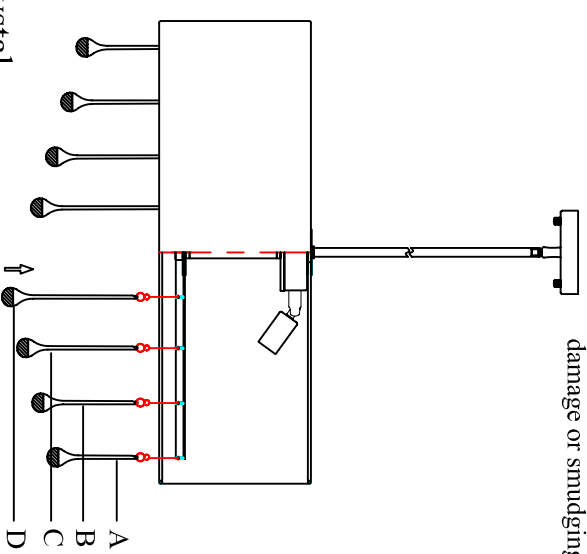

Hang the crystal (A),(B) ,(C)& (D).

10