

INSTALLATION INSTRUCTIONS FORP5301-L

For LED Wall Mount Fixture

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT ! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DODISJONCTEUR.

PREPARATION

1. Shut off power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Remove screw (H) and remove frame (J) and glass(W) from back plate (E).
4. Position mounting plate (F) on the wall, and mark the location of the two drywall anchors (A). Pre-drill the holes for the drywall anchors (A). Insert the drywall anchors (A) into the wall.
5. Attach the mounting plate (F) to the junction box and secure with mounting screws (C) (Size: 8-32*1/2"L) and wood screws (G). The side of the mounting plate marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

6. Connect the electrical wires as shown in Fig.2, making sure that all wire nuts are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground Wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (F) using the green screw (D) provided. Tuck the wire connections neatly into the junction box.

FINISHING THE INSTALLATION (FIG. 1)

7. Align back plate (E) to screws (B) and secure with cap nuts (I).
8. Align Glass(W), Frame(J) to the back plate (E) and secure with screws (H).

CAUTION /ATTENTION: When handling the fixture, do not apply pressure to the LED's. Hold the fixture by the base or front back plate (E) only.

Replacing LED module (Fig. 3)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig. 3)

Warning: Turn off power at the circuit breaker before replacing LED module or LED driver.

- a. Remove screws (H), frame(J), glass(W) and remove fixture (E) from mounting plate (F).
- b. Remove the wire nuts located inside the junction box.
- c. Remove screws (L) to remove bracket (K). Remove the wire nuts located inside the bracket (K), remove screw (Q) on fastener (R) to disconnect the LED module. And remove screws (N) and plastic gasket (O) to remove LED module (M).
- d. Reverse steps a-c for installing the new LED module.
- e. Note: The LED module should be provided by a specified supplier.
- f. For better heat dissipation the LED module should be applied with thermal grease when re-lamping.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Dimmable with ELV and/or LED compatible wall dimmer switches.

Fig.1

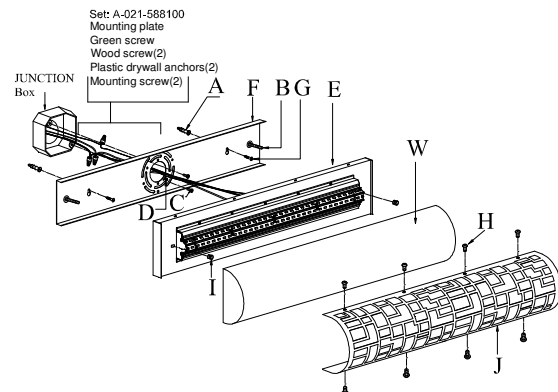


Fig.2

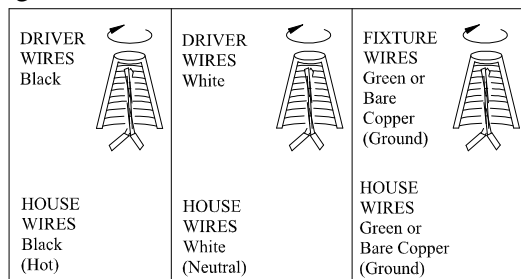


Fig 3

