




RH30

COVE / CABINET / SHOWCASE / DISPLAY
MINI RECESSED SERIES • TRIMS

Type	
Project	
Catalog No.	

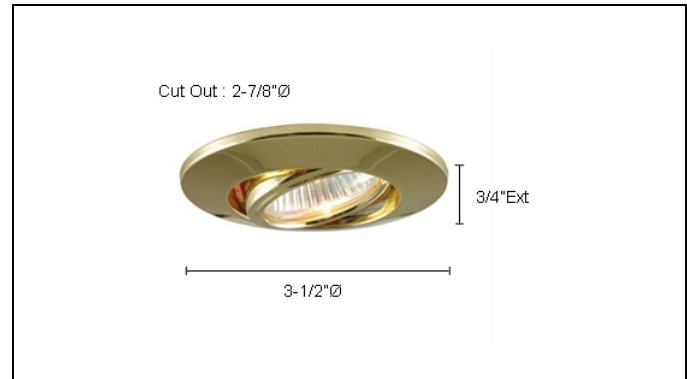

CATALOG INFORMATION

MODEL	FINISH
RH30	BL – Black
	CH – Chrome
	PB – Polished Brass
	ST – Satin Chrome
	WH – White

DESCRIPTION / SPECIFICATIONS

- Low Voltage Die Cast Adjustable Mini Gimbal Ring
- 35° adjustability from vertical
- Includes 12" lead wire
- Dimensions: 3-1/2"Ø x 3/4" Ext.
- Cut-off: 2-7/8" Ø
- Lamp: MR16G 12V 35W max (sold separately)

COMPATIBLE HOUSING



RH25
(Sold separately)
1/4" Self Flanged Housing

Dimensions: 2-3/4"Ø x 1"H
Finish: BK - Black

SOCKETS

SC-6RND: 6" Socket – White (Round socket for MR16 & MR11 Lamp)
SC-30RND: 30" Socket – White (Round socket for MR16 & MR11 Lamp)
SC-42RND: 42" Socket – White (Round socket for MR16 & MR11 Lamp)
SC-54RND: 54" Socket – White (Round socket for MR16 & MR11 Lamp)
SC-6REC: 6" Rectangular Socket (For MR116 & MR11 Lamp)

ORDERING INSTRUCTIONS

Example: **MODEL** – **FINISH**

RH30 – PB

INSTALLATION / FEATURES

- Trim mount easily with tension clips
- Compact housing is perfect for installation in tight spaces.
- May be powered with a Class 2 Electronic transformer.
- Suitable for cabinets, shelf lighting retail counters, tradeshow and exhibit booths and residential furnishings.
- Not suitable for drywall installations.

12V TRANSFORMERS

PLUG & PLAY TRANSFORMERS

XF60P3-BK UL Listed Class 2 with 6-light AMP – 60W max
 XF60P3-WH UL Listed Class 2 with 6-light AMP – 60W max
 XF-60C UL Recognized Class 2 with 1-light AMP – 65W max

HARD WIRE TRANSFORMERS

XF-60 UL Recognized Class 2 – 60W max

LABELS

Not UL Listed