

NE-981 / NE-982

Emergency LED Remote Head(s)

Source: 1W LED per head

80lm per head

Type

Project

Catalog No.

Notes

PRODUCT DESCRIPTION

Remote emergency LED head(s) provide superior aiming and flexible appearance along with excellent performance. Internal solid state switching automatically activates fixture during power loss. Universal single and dual-head DC remote emergency lighting modules. Connects to any 3V to 12V emergency battery available in most exit or emergency fixtures.

FEATURES

- 80 lumen / 1 Watt LED per head
- Fully adjustable, glare free light heads with positioning lock
- Reliable slide friction position hold
- Single or dual head
- 3 to 12 Volt operation
- Injection molded thermoplastic housing
- Wet location rated

HOUSING

Injection molded, thermoplastic housing

LENS

Acrylic molded, thermoplastic housing

ANGLE ADJUSTMENT

365° horizontal rotation and 160° vertical adjustment

ELECTRICAL

Input Voltage: 3V to 12V

Lumens / Wattage: 80lm / 1W per head

Light Source: LED

REMOTE


Use with 3 Volt to 12 Volt battery operated luminaires

LISTING


cULus Listed for Wet Locations



PRODUCT IMAGES AND DIMENSIONS



NE-981
Single Head

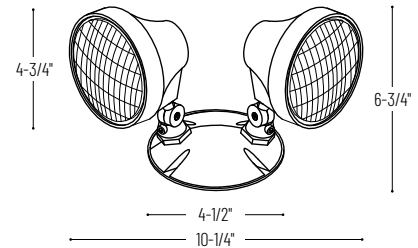

NE-982
Dual Head

Emergency LED Remote Head(s)

Number of Heads

NE-981 = Emergency LED Remote Single Head, 1W

NE-982 = Emergency LED Remote Dual Head, 2W

Example: **NE-981** = Emergency LED Remote Single Head, 1W