

# JULI





# 120V PENDANTS

# **SPECIFICATIONS:**

#### **DESCRIPTION**

Cord-hung, cable-hung or stem-mount pendant with handcrafted glass diffuser.

### **LAMPING**

**Standard:** 100W A19 120V incandescent, suitable for dimming, not included. **CFL:** 26W 4-Pin CFL with non-dimming electronic ballast. 120V lamp not included.

**GU24 CFL:** Self-ballasted GU24 lampholders. 26W max, 120V, lamp not included. **LED:** 10W GU24 LED Lamp 120V, dimmable, included.

#### **DIFFUSER**

Shade shall be handcrafted glass of various decors. 6" Dia. x 11.25" H **Opening sizes:** 101mm min. (top), 3x10mm holes.

### **SUSPENSION**

**Cord-hung:** 10' SVT-type cord, complete with 5" decorative sleeve at the socketholder. Jacket coordinates with metal finish. Available on 1, 3 or 6 light canopies, shown on next page. Plated stamped steel construction. Bronze or Satin Nickel.

**Cable-hung:** 1x 10' aircraft-quality stainless steel cable support with 10' AWM-type cord. Jacket coordinates with metal finish. 5" Dia. dome canopy is plated stamped steel. Bronze or Satin Nickel.

**Stem-mount:** 4 connectable stem sections (3", 6", 12" and 18" lengths), 10' max. 5" Dia. canopy (with swivel) and stem sections are plated steel. Bronze or Satin Nickel.


JULI SHOWN IN CEYLON (4125CE) WITH BRONZE FINISH & AMBER CLOUD (412518)


# MOUNTING

Installs directly to a 4" octagonal ceiling box. Suitable for sloped ceilings.

### LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only). Consult factory concerning lower wattage labeling for energy requirements.



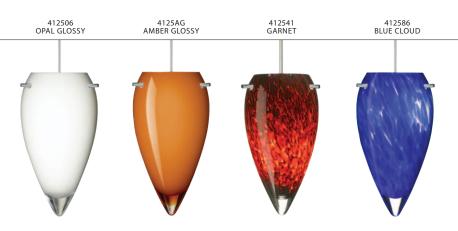

# For ordering information, see next page

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

**REV 10/14** 



# JULI

120V PENDANTS

# **ORDERING:**

CONNECTION -	GLASS OPTIONS -	LAMP OPTIONS	- METAL FINISH -	OPTIONS
Cord Fixture	<b>412506</b> Opal Glossy	(blank) 100W A19 Incan	BR Bronze	<b>L</b> 15' cord
1JC 1 Lt. Dome	412518 Amber Cloud	I1 26W TBX 120V	SN Satin Nickel	LW Low wattage
<b>1JT</b> 1 Lt. Flat	412541 Garnet	R1 26W TBX 277V		labeling
	<b>412586</b> Blue Cloud	GU24 26W GU24 120V		
Cable Fixture	4125AG Amber Glossy	<b>LED</b> 10W LED 120V,		
1KX 1 Lt. Dome	4125CE Ceylon	dimmable		

Stem Fixture

1TT 1 Lt. Flat

Ex. 1JT-412519-SN Juli Pendant w/ Carrera Glass, Satin Nickel Finish

## **LED 120V PENDANTS:**

- Internal driver integrated in the lamp, GU24 base
- Total power of only 10 watts
- Dimmable with a standard dimmer
- Rated life: 30,000 hours
- · Frosted acrylic diffuser
- 800 lumens
- CCT: 2800° Kelvin
- CRI: 80+

# **ACCESSORIES:**

#### **ADDITIONAL STEM SECTIONS:**

Additional connecting stems are available to increase overall length, up to 10' max. Telescoping adjustable section allows up to 3" movement.

**T20A-SN** or **T20A-BR** Adj. Section **T203-SN** or **T203-BR** 3" Section **T206-SN** or **T206-BR** 6" Section **T212-SN** or **T212-BR** 12" Section **T218-SN** or **T218-BR** 18" Section

## **LONGER CORD LENGTHS:**

Longer cord length of 15' available. Add an "L" to the end of the item number, i.e. 1JC-169707-SNL.

## **CORD SLEEVES:**

If concealing the cord is desired, order our 0.25" dia. metal sleeves. Each sleeve is 18" long and may be field cut.

T118-SN Satin Nickel T118-BR Bronze

## STEMHOOKS:

Suspension hooks allow cord drops to be placed wherever desired. Suitable for sloped ceilings.

T103BR Bronze T103SN Satin Nickel

# **HOW TO ORDER A MULTILIGHT FIXTURE**

To order, simply place the 3 character multilight code (shown to the right) as the cord fixture option:


Example: 3BC-493007-SN

3 Light round, Copa Opal glass, Satin Nickel finish

# **Project Information:**


## **PENDANT OPTIONS:**

### MONOPOINT PENDANT CANOPY




- Flat or Dome Canopy styles. Dome style allows adjustment without cutting cord.
- Suitable for sloped ceilings
- Cord: 10' SVT, 5" sleeve at socketholder (V Series utilizes SJT-type)
- Bronze or Satin Nickel

## **3BB or 3JB** 3 LIGHT LINEAR CANOPY




- · 2x stemhooks included
- Suitable for sloped ceilings
- Cords: 10' SVT, 5" sleeve at socketholder
- · Bronze or Satin Nickel

## **3BC or 3JC** 3 LIGHT ROUND CANOPY




- 3x stemhooks included
- 1,25" Suitable for sloped ceilings
  - Cords: 10' SVT. 5" sleeve at socketholder
  - Bronze or Satin Nickel

### 3BW or 3JW 3 LIGHT LARGE ROUND CANOPY




- 3x stemhooks included
- $\bar{\mathbb{I}}^{1.25''}$  Suitable for sloped ceilings
  - Cords: 10' SVT, 5" sleeve at socketholder
  - Bronze or Satin Nickel

# **3BV or 3JV** 3 LIGHT BAR CANOPY



- Some offset installation possible
- , Suitable for sloped ceilings
- Cords: 10' SVT, 5" sleeve at socketholder
- Bronze or Satin Nickel

# **6BC or 6JC** 6 LIGHT ROUND CANOPY



- 6x stemhooks included
- Suitable for sloped ceilings
- Cords: 10' SVT, 5" sleeve
- Bronze or Satin Nickel

# CABLE-HUNG PENDANT



- 1x 10' aircraft-quality stainless steel cable
- Suitable for sloped ceilings
- 1x lampholder
- 4-pin CFL options available
- Cord: 10' AWM-type provided
- Bronze or Satin Nickel

#### STEM PENDANT



- Swivel at canopy, suitable for sloped ceilings
- Includes telescoping section plus 4 connectable stem sections, (1x 3", 1x 6", 1x 12", 1x 18"), 10' max
- Bronze or Satin Nickel