



BESA LIGHTING

SW LASSO

VANITIES WALL

location:
DAMP

SPECIFICATIONS:

DESCRIPTION

2-4 light vanity luminaires featuring handcrafted glass.
Multilight version of 1SW Lasso sconce.

LAMPING

Standard: 40W Low-pressure G9 Halogen 120V lamp, included.

Suitable for use in an open fixture. Dimmable with standard incandescent dimmer.

LED: 5W LED Replaceable source 120V, dimmable, included.

DIFFUSER

Shade shall be handcrafted glass of various decors.

4.75" Dia. x 3.0" H, spaced 7.875" apart on center.

CONSTRUCTION

Fixture utilizes metal arm assembly and stamped steel body, with plated finish.

Decorative finials can be removed for downlighting applications. Decorative outlet box cover optional when not required.

METAL FINISH

Fixture shall be finished in Bronze, Chrome or Satin Nickel.

MOUNTING

Installs directly to a 4" octagonal outlet box, with 1.75" left or right offset. Canopy allows direct wiring without outlet box, where armored cable or non-metallic sheathed cable is employed, and the decorative outlet box cover is not required. Orient upward or downward, wall-mount only.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).



LASSO SHOWN IN GLITTER (5612GL) IN CHROME FINISH

561207
OPAL MATTE



5612GD
GOLD GLITTER



For ordering information, see next page

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.



BESA LIGHTING

SW LASSO


VANITIES WALL

ORDERING:


FIXTURE	-	GLASS OPTIONS	-	METAL FINISH	-	METAL FINISH	-	OPTIONS
2SW 2 Light Vanity		561207 Opal Matte		(blank) 40W G9 Hal		BR Bronze		SQ Square Canopy
3SW 3 Light Vanity		5612GD Gold Glitter		LED 5W LED 120V, dimmable		CR Chrome		
4SW 4 Light Vanity		5612GL Glitter				SN Satin Nickel		

Ex. 3SW-5612GL-SN


Lasso 3-Light Vanity w/ Glitter Glass, Satin Nickel Finish




2SW: 14.625" L



3SW: 22.5" L

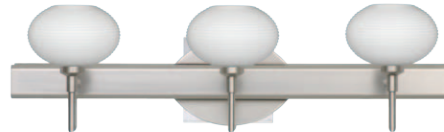

4SW: 30.375" L

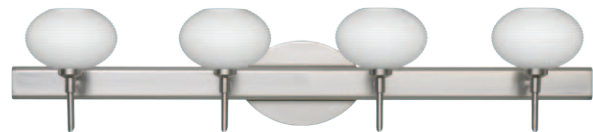

LED SCONCES:

- Total power of only 5 watts
- Dimmable with a standard dimmer
- Rated life: 25,000 hours
- 450 lumens
- CCT: 3000° Kelvin
- CRI: 80+

Canopy allows direct wiring without outlet box, where armored cable or non-metallic sheathed cable is employed, and the decorative outlet box cover is not required. Orient upward or downward, wall-mount only.

Project Information: