



# LINDY

120V PENDANTS

location:  
**DAMP**

## SPECIFICATIONS:

### DESCRIPTION

Cord-hung pendant with Spun metal shade.

### LAMPING

**Standard:** 60W A19 Medium-based 120V incandescent, suitable for dimming, not included.

**CFL:** 18W 4-Pin CFL with non-dimming electronic ballast, 120V, lamp not included.

**GU24 CFL:** Self-ballasted GU24 lampholders, 18W max, 120V, lamp not included.

**LED:** 10W GU24 LED Lamp 120V, dimmable, included.

### SHADE

Shade shall be of spun metal exterior with various powder coat colors on the interior. 4" Dia. x 10" H

### SUSPENSION

**Cord-hung:** 10' SVT-type cord, complete with 5" decorative sleeve at the socketholder. Jacket coordinates with metal finish. Available on 1, 3 or 6 light canopies, shown on next page. Plated stamped steel construction. Bronze or Satin Nickel.

### MOUNTING

Installs directly to a 4" octagonal ceiling box. Suitable for sloped ceilings.


### LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

Consult factory concerning lower wattage labeling for energy requirements.




LINDY SHOWN IN CINNAMON (LINDCN) WITH BRONZE FINISH AND AQUA (LINDAQ)



LINDYCY  
CYAN

LINDGD  
GOLD

LINDWH  
WHITE

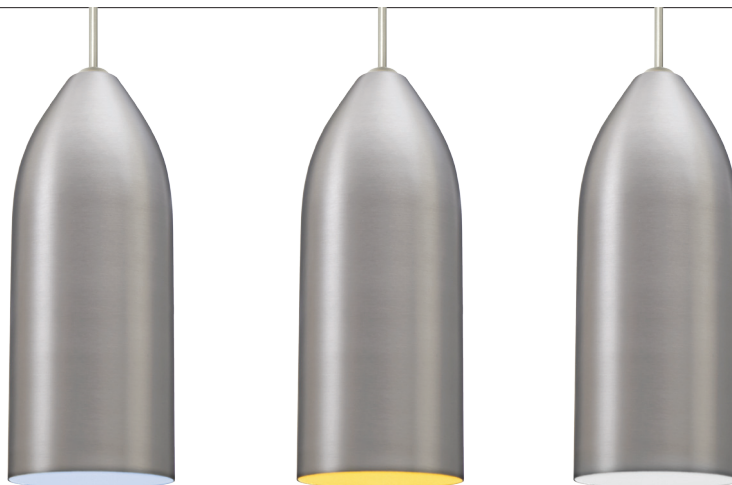

**For ordering information, see next page**

All dimensions provided are nominal.  
Allowance must be made for dimensional tolerance in handcrafted glasses.

**REV 7/15**



## LINDY

120V PENDANTS


### ORDERING:

CONNECTION	GLASS OPTIONS	LAMP OPTIONS	METAL FINISH
Pendant Fixtures	<b>LINDAQ</b> Aqua	<b>(Blank)</b> 60W A19 120V	<b>BR</b> Bronze
<b>1JC</b> Dome Canopy	<b>LINDCN</b> Cinnamon	<b>E1</b> 18W Quad 120V	<b>SN</b> Satin Nickel
<b>1JT</b> Flat Canopy	<b>LINDCY</b> Cyan	<b>N1</b> 18W Quad 277V	
	<b>LINDGD</b> Gold	<b>GU24</b> 18W GU24 120V	
	<b>LINDWH</b> White	<b>LED</b> 10W LED 120V, dimmable	

**Ex. 1JT-LINDAQ-SN**  
Lindy Pendant, Aqua,  
Satin Nickel Finish


### PENDANT OPTIONS:

#### MONOPOINT PENDANT CANOPY




- Flat or Dome Canopy styles. Dome style allows adjustment without cutting cord.
- Suitable for sloped ceilings
- Cord: 10' SVT, 5" sleeve at socketholder (V Series utilizes SJT-type)
- Bronze or Satin Nickel

#### 3BB or 3JB 3 LIGHT LINEAR CANOPY

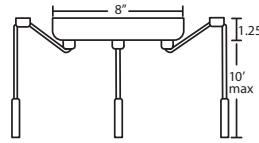


- 2x stemhooks included
- Suitable for sloped ceilings
- Cords: 10' SVT, 5" sleeve at socketholder
- Bronze or Satin Nickel

#### 3BC or 3JC 3 LIGHT ROUND CANOPY

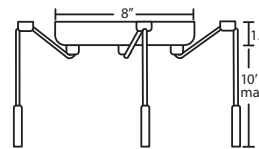


- 3x stemhooks included
- Suitable for sloped ceilings
- Cords: 10' SVT, 5" sleeve at socketholder
- Bronze or Satin Nickel

#### 3BW or 3JW 3 LIGHT LARGE ROUND CANOPY

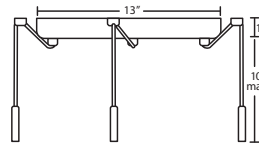


- 3x stemhooks included
- Suitable for sloped ceilings
- Cords: 10' SVT, 5" sleeve at socketholder
- Bronze or Satin Nickel

#### 3BV or 3JV 3 LIGHT BAR CANOPY



- Some offset installation possible
- Suitable for sloped ceilings
- Cords: 10' SVT, 5" sleeve at socketholder
- Bronze or Satin Nickel

#### 6BC or 6JC 6 LIGHT ROUND CANOPY

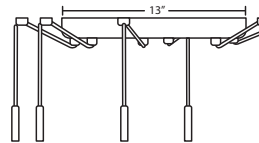

- 6x stemhooks included
- Suitable for sloped ceilings
- Cords: 10' SVT, 5" sleeve
- Bronze or Satin Nickel

### LED 120V PENDANTS:

- Internal driver integrated in the lamp, GU24 base
- Total power of only 10 watts
- Dimmable with a standard dimmer
- Rated life: 30,000 hours
- Frosted acrylic diffuser
- 800 lumens
- CCT: 2800° Kelvin
- CRI: 80+

### ACCESSORIES:

#### CORD SLEEVES:

If concealing the cord is desired, order our 0.25" dia. metal sleeves. 18" long. May be field cut.

**T118-SN** Satin Nickel  
**T118-BR** Bronze

#### STEMHOOKS:

Suspension hooks allow cord drops to be placed wherever desired. Suitable for sloped ceilings.

**T103BR** Bronze  
**T103SN** Satin Nickel

#### LONGER CORD LENGTHS:

Longer cord length of 15' available. Add an "L" to the end of the item number, i.e. 1JC-169707-SNL.

### Project Information:

### HOW TO ORDER A MULTILIGHT FIXTURE

To order, simply place the 3 character multilight code (*shown above*) as the cord fixture option:

**Example: 3BC-493007-SN**  
3 Light round, Copa Opal glass, Satin Nickel finish