

SOLA 10 / 12 / 16

FLUSH MOUNT CEILING

SPECIFICATIONS:

DESCRIPTION

Flush-mounted round ceiling luminaires, featuring handcrafted glass. Three sizes available.

LAMPING

Standard: 60W A19 120V incandescent, suitable for dimming, not included.
CFL: 4-Pin CFL with non-dimming electronic ballast. 120V, lamp not included.
GU24 CFL: Self-ballasted GU24 lampholders. 13W max, 120V, lamp not included.
LED: 10W GU24 LED Lamp 120V, dimmable, included.
Consult factory for other CFL configurations., CFL lamps not included.

DIFFUSER

Handcrafted glass diffuser is available in various decors. Sola 10 #9432XX: 11" Dia. x 4.25" H Sola 12 #9431XX: 16.5" Dia. x 5.25" H Sola 16 #9430XX: 16.5" Dia. x 5.25" H

CONSTRUCTION

Glass diffuser is secured to fitter with three set screws. Stamped aluminum fitter is powder coated white.

MOUNTING

Installs directly to a 4" octagonal outlet box, centered on fixture. 90°C supply wire required for incandescent lamping.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).



SOLA CEILING SHOWN IN COSMIC



For ordering information, see next page

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 10/14


location:



SOLA 10 / 12 / 16

FLUSH MOUNT CEILING

ORDERING:

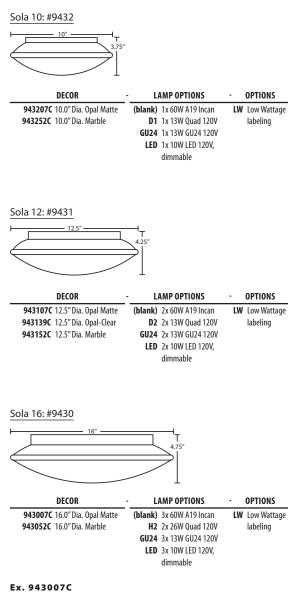

Sola 16 Ceiling w/ Opal Matte Glass

