


FIXTURE INSTALLATION

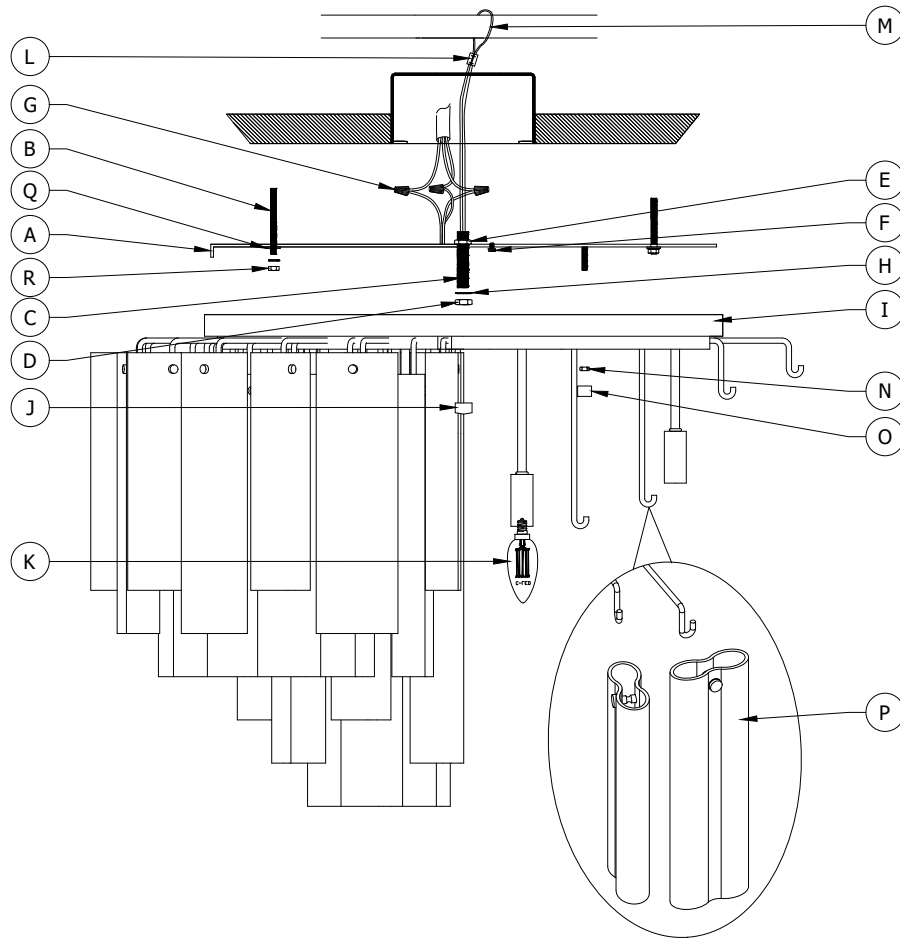

1. Using the MOUNTING PLATE (A) as a template mark the holes for the THREADED ROD (B) (BY OTHERS). NOTE: THREADED ROD (B), WASHER (Q), and NUT (R) (BY OTHERS) must be a minimum of $\frac{1}{4}$ and affixed to the building structure following local building codes.
2. Thread the NIPPLE (C) onto the MOUNTING PLATE (A). Adjust the thread of the NIPPLE (C) so that its thread extends $\frac{2}{3}$ " beyond the FIXTURE ASSEMBLY (I) then secure with HEX NUT (E), TOOTH WASHER (H) & HEX NUT (D).
3. Slide crimp type CABLE CLAMP (L) onto the safety cable. Feed the SAFETY CABLE (M) down through one of the holes in the top of the outlet box. Loop the SAFETY CABLE (M) over the additional support. Feed the SAFETY CABLE (M) back through the top of the box and the CABLE CLAMP (L). Using the crimping tool, tightly crimp the CABLE CLAMP (L) to lock the SAFETY CABLE (M) in position.
4. Pull the wires out of the Junction box and attach the MOUNTING PLATE (A) onto the junction box & ceiling using the THREADED ROD (B). This fixture is designed to be mounted on a Heavy duty round or octagon junction box rated for a minimum 90lbs. The junction box must be securely mounted to the structure of the building.
5. Attach the Ground wire (Green) to the ground inside the outlet box (Generally green or bar copper wire) or the GROUND SCREW (F) on the MOUNTING PLATE (A). NEVER CONNECT GROUND WIRE TO "HOT" WIRE! FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!
6. Connect the white fixture lead to the neutral (Generally white) wire in the outlet box. Fasten the wires together with an approved fastener (WIRE NUT) (G). Starting 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener. MAKE SURE THERE ARE NO EXPOSED WIRE OF STRANDS THAT COULD CAUSE A DANGEROUS SHORT CIRCUIT!
7. Connect the black fixture leads to the hot (Generally black) wire in the junction box. Fasten the joined wires same as previous step. NEVER REVERSE HOT AND NEUTRAL WIRES. FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!
8. Push the wires back into the junction box. Attach the FIXTURE ASSEMBLY (I) onto the MOUNTING PLATE (A) and secure with HEX NUT (N), CENTER LOCK UP (J), and CAP NUTS (O).
9. Screw the BULB (K) into the SOCKET of the fixture. THIS FIXTURE IS RATED FOR 10 WATT TYPE B LAMP. DO NOT EXCEED THE RECOMMENDED WATTAGE!
10. Insert the GLASS (P) onto the FIXTURE ASSEMBLY (I). (SEE GLASS SCHEDULE PAGE).
11. Restore power to the outlet at the breaker or fuse box.



PART(S)	REPLACEMENT PART NAME	NUMBER
A,B,C,D,E,F,G,H	HARDWARE KIT	HDW-502-34
O	CAP NUTS	CPN-502-34

CORBETT

VARENNA
502-34
Installation Instructions

GLASS INSTALLATION

1. Insert the LARGE GLASS (AA), MEDIUM GLASS (BB) & LARGE GLASS (CC) alternately onto the hooks of FIXTURE ASSEMBLY.

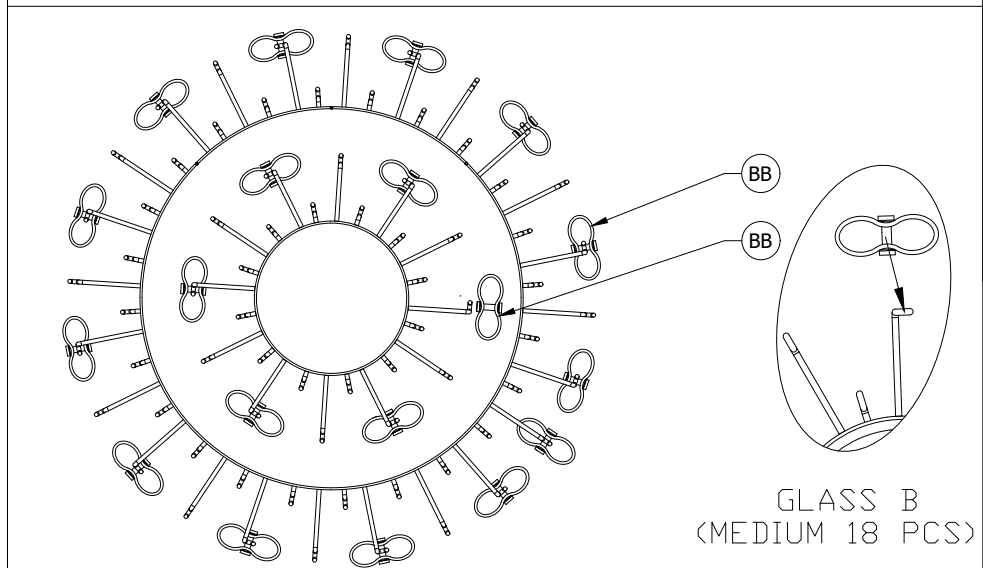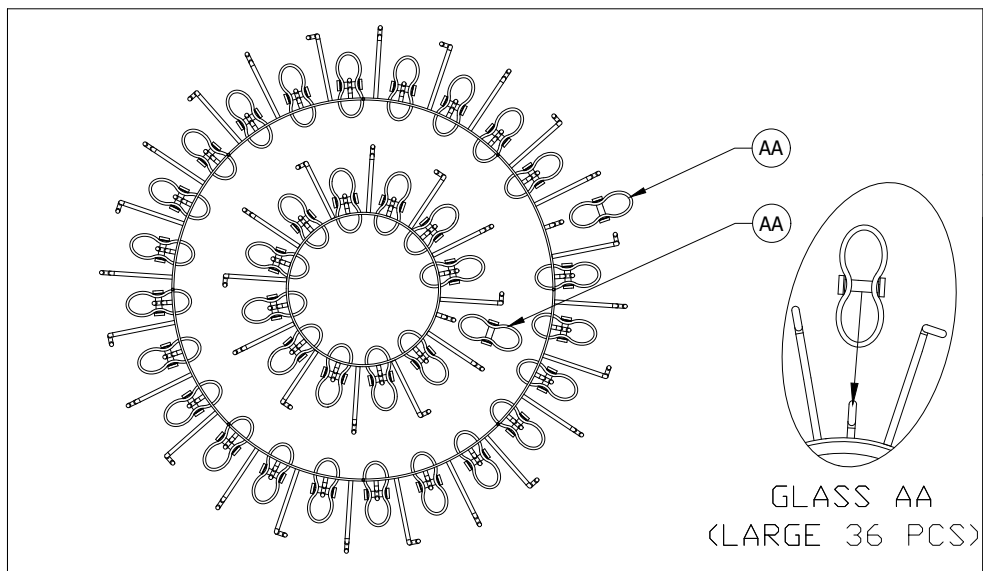

PART(S)	REPLACEMENT PART NAME	NUMBER
AA	GLASS ASSEMBLY A	GAS-502-20 A
BB	GLASS ASSEMBLY B	GAS-502-20-B
CC	GLASS ASSEMBLY C	GAS-502-20-C

