



# V E N U S

120V PENDANTS

location:  
**DRY**

## SPECIFICATIONS:

### DESCRIPTION

Cord-hung, cable-hung or stem-mount pendant with cardboard shade.

### LAMPING

**LED:** 9W Replaceable source, 120V, dimmable, 80+ CRI, 3000°K CCT, 800 lumens, 25,000 hours. Lamp included.

### SHADE

Shade shall be of cardboard material.  
17.75" Dia. x 7.5" H

### SUSPENSION

**Cord-hung:** 10' SVT-type cord, complete with 5" decorative sleeve at the socketholder. Jacket coordinates with metal finish. Plated stamped steel construction.

**Cable-hung:** 1x 10' aircraft-quality stainless steel cable support with 10' AWM-type cord. Jacket coordinates with metal finish. 5" Dia. dome canopy is plated stamped steel. Bronze or Satin Nickel.

**Stem-mount:** 4 connectable stem sections (3", 6", 12" and 18" lengths) plus telescoping piece for up to 3" adjustment, 10' max. 5" Dia. canopy (with swivel) and stem sections are plated steel. Bronze or Satin Nickel.

### MOUNTING


Installs directly to a 4" octagonal ceiling box. Suitable for sloped ceilings.

### LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only). Consult factory concerning lower wattage labeling for energy requirements.



VENUS

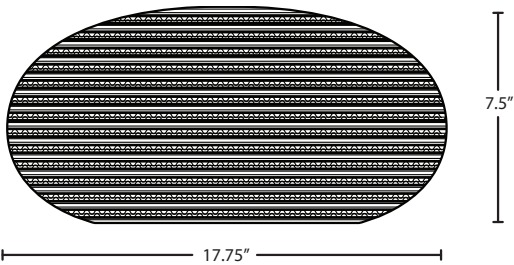

**Project Information:**

**For ordering information, see next page**

All dimensions provided are nominal.  
Allowance must be made for dimensional tolerance in handcrafted glasses.

**REV 1/17**



ORDERING:


CONNECTION	SHADE OPTIONS	LAMP OPTIONS	METAL FINISH	OPTIONS
Pendant Fixtures	<b>VENUS</b> Venus	<b>LED</b> 9W LED 120V, dimmable	<b>BR</b> Bronze <b>SN</b> Satin Nickel	<b>L</b> 15' cord <b>LW</b> Low wattage labeling
<b>1JC</b> Dome Canopy				
<b>1JT</b> Flat Canopy				
Cable Fixture				
<b>1KX</b> 1 Lt. Dome				
Stem Fixtures				
<b>1TT</b> Flat Canopy				

Ex. 1JT-VENUS-SN  
Venus Pendant,  
Satin Nickel Finish

\*Consult factory for multi light options


PENDANT OPTIONS:

1JT / 1JC MONOPOINT PENDANT CANOPY




- Flat or Dome Canopy styles. Dome style allows adjustment without cutting cord.
- Suitable for sloped ceilings
- Cord: 10' SVT, 5" sleeve at socketholder (V Series utilizes SJT-type)
- Bronze or Satin Nickel

1TT STEM PENDANT



- Swivel at canopy, suitable for sloped ceilings
- Includes telescoping section plus 4 connectable stem sections, (1x 3', 1x 6', 1x 12', 1x 18'), 10' max
- Bronze or Satin Nickel

1KX CABLE-HUNG PENDANT



- 1x 10' aircraft-quality stainless steel cable
- Suitable for sloped ceilings
- 1x lampholder
- Cord: 10' AWM-type provided
- Bronze or Satin Nickel

ACCESSORIES:

ADDITIONAL STEM SECTIONS:

Additional connecting stems are available to increase overall length, up to 10' max. Telescoping adjustable section allows up to 3" movement.

<b>T20A-SN</b> or <b>T20A-BR</b>	Adj. Section
<b>T203-SN</b> or <b>T203-BR</b>	3" Section
<b>T206-SN</b> or <b>T206-BR</b>	6" Section
<b>T212-SN</b> or <b>T212-BR</b>	12" Section
<b>T218-SN</b> or <b>T218-BR</b>	18" Section

LONGER CORD LENGTHS:

Longer cord length of 15' available. Add an "L" to the end of the item number, i.e. 1JC-169707-SNL.

LOW WATTAGE LABELING:

Incandescent fixture supplied with 16 watt relamp label. Add an "LW" to the end of the item number, i.e. 1JC-169707-SN-LW.

CORD SLEEVES:

If concealing the cord is desired, order our 0.25" dia. metal sleeves. Each sleeve is 18" long and may be field cut.

- T118-SN** Satin Nickel
- T118-BR** Bronze

STEMHOOKS:

Suspension hooks allow cord drops to be placed wherever desired. Suitable for sloped ceilings.

- T103BR** Bronze
- T103SN** Satin Nickel