

# Eco-Cove LED

## 120V Cove Lighting

### Linkable Series


Catalog #:

Type:

Project:

Date:

Notes:

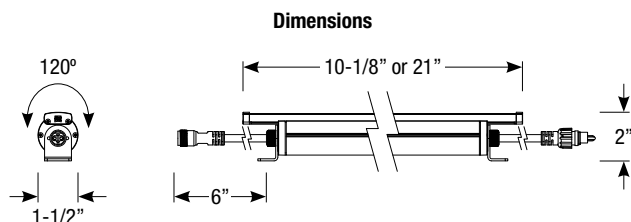

#### Electrical Data

Part Number	Wattage	Lumens	Efficacy
ECV-10 (10-1/8")	6W	400lm	67lpw
ECV-20 (21")	12W	800lm	67lpw

#### Specifications

##### Description

Cove lighting series with integral electronic driver allows up to 100' runs that are dimmable with forward or reverse phase dimmers.

##### LED Light Engine

- 6W or 12W LED @ 2700K / 90 CRI or 4000K / 80 CRI
- 50,000 hours at 70% lumen maintenance (L70)

##### Integral Dimming Driver

- Integrated 120V driver
- Incandescent and ELV dimmable
- Linkable up to 100'

##### Mounting

Each section of Eco-Cove includes stainless steel mounting brackets mounted directly behind cove lighting. Can be plugged into receptacle with a 20' cord and plug (ordered separately, ECV-PWR-20).

##### Housing

- Adjustable - 120° total rotation
- Brushed aluminum extruded heat sink
- Polycarbonate lens
- PVC driver housing
- Integral 6" male and female connectors

##### Linkable Cables and Connectors

Eco-Cove can link multiple luminaires up to 100'. Each luminaire includes 6" male and female connectors, longer lengths are available (1', 5' or 10').

##### Listing/Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for wet locations
- IP67 rated



#### Order Matrix

##### Eco-Counter Order Matrix (Example: ECV-20-40-2)

Series	Length	CCT / CRI	Rev
ECV	-10 (10-1/8")	-27 (2700K / 90 CRI)	-2
	-20 (21")	-40 (4000K / 80 CRI)	

##### Accessories

Description
ECV-CON-1 (1' Connector)
ECV-CON-5 (5' Connector)
ECV-CON-10 (10' Connector)
ECV-PWR-20 (20' Power Feed)

Revised 08/03/17