


# Assembly Instruction Sheet #IS-1203P29 For Style 1203P29


**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.  
**Light Source:** (22) E12 Candeflex Base Bulbs 60W Maximum (Not Included).  
**Estimated Assembly Time:** 20-30 minutes.  
**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

**⚠ Warnings and Cautions**  
 Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

## Package Contents



A) Fixture Body x1




B) Middle Rod x1

C) Glass tube x22

## Hardware Contents

PART	DESCRIPTION	QUANTITY
AA	Canopy Lock Ring	1pcs
BB	Wire Nut	3pcs
CC	Canopy Chain Loop	1pcs
DD	Crossbar	1pcs
EE	Outlet Box Screw	2pcs



**STEP 1 - Install Middle Rod to Fixture Body**  
 A. Thread the power cord to the Middle Rods, fix the Middle Rods with the fixture body.

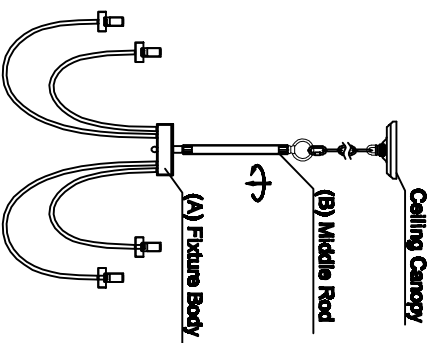


Figure 1

**STEP 2 - Install the Canopy Chain Loop and Nipple**  
 A. Thread the nipple into the outlet box. Thread the lock washer and the hex nut onto top end of the nipple. Do not tighten at this stage.  
 B. Attach the canopy to the outlet box and secure with outlet box screws (not included). Tighten slightly and stop.  
 C. Thread the canopy chain loop onto the end of the nipple and hand tighten until snug. Press the ceiling canopy over the canopy chain loop against the ceiling to determine the correct point of installation. Thread the canopy lock ring onto the canopy chain loop. Push the canopy lock ring into the ceiling until it is flush by the ceiling. Tighten the ceiling canopy to rest against the ceiling when hand tight.  
 D. Remove the canopy lock ring from the canopy chain loop and remove the ceiling canopy. Use the outlet box screws to remove the outlet assembly. Tight the hex nut and washer onto the nipple. And then install the outlet assembly to the outlet box.




Figure 2

**STEP 3 - Install the Fixture Chain and Ceiling Canopy**  
 A. Adjust the fixture chain to your desired length by removing links if needed.  
 B. Pull the supply wires through the fixture chain, alternating links. After the wires are through the fixture chain, pull the supply wires and the ground wire through the canopy lock ring and the ceiling canopy in order.  
 C. Attach one end of the fixture chain to the fixture loop with one quick link. Let the fixture end of fixture chain up and attach the other end of the fixture chain onto the canopy chain loop with another quick link. The fixture will now hang safely.  
 D. Feed the supply wires and ground wire through the canopy chain loop and nipple into the outlet box. Cut the wires leaving approximately 6" of wire extending from the outlet box.  
 E. Go to Step 4 for wire connections and follow the directions.  
 Return to Step F in this step when complete with Step 4.  
 F. Rub the ceiling canopy and canopy lock ring up the fixture chain and over the canopy chain loop. Tighten the canopy lock ring onto the canopy chain loop until tight.




Figure 3

**STEP 4 - Wire Connections**  
 A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

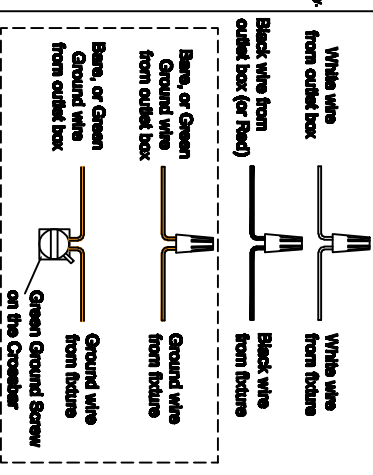


Figure 4

**STEP 5 - Install Bulbs and Glass tube.**  
 A. Install bulbs into sockets and push snug into place.  
 B. Install the glass tube on the lamp holder.  
 C. Be careful that glass is fragile.

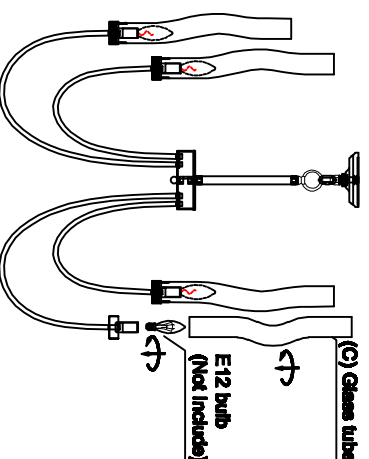


Figure 5