


# ASSEMBLY INSTRUCTIONS

ITEM NO:BO-3028FL

CAREFULLY UNPACK AND PLACE ALL PARTS ON A SMOOTH SURFACE.

1. SCREW THE SOCKET ASSEMBLY (A) INTO THE POLE (B) TO TIGHTEN.
2. SCREW THE POLE (B) INTO THE POLE (C) TO TIGHTEN.
3. SCREW THE POLE (C) INTO THE POLE (D) TO TIGHTEN.
4. SCREW THE POLE (D) INTO THE POLE (E) TO TIGHTEN.
5. SCREW THE POLE (E) ONTO THE BASE (F) TO TIGHTEN.  
GET THE REMAINING SLACK OF THE POWER CORD  
OUT FROM BASE HOLD.
6. PUT THE FELT PAD (G) TO THE BOTTOM OF THE BASE (F).
7. SCREW THE THREADED ROD (H) INTO SOCKET  
ASSEMBLY (A) TO TIGHTEN.
8. PLACE SHADE (I) ONTO THREADED ROD(H) BY FINIAL (J)  
TO TIGHTEN.
9. INSTALL BULB (NOT INCLUDED) INTO THE SOCKET.
10. INSERT THE POWER PLUG INTO AN OUTLET AND ENJOY!!

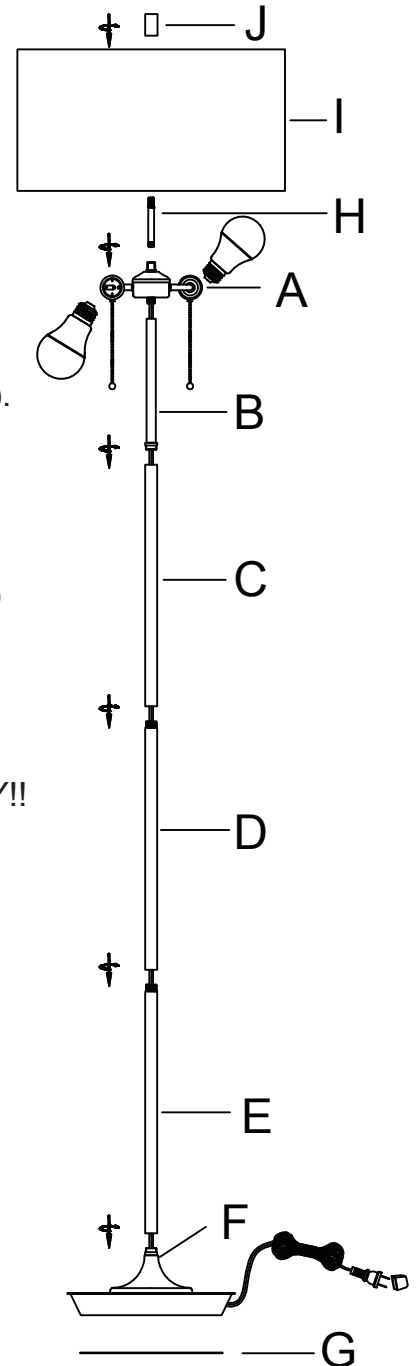

**Use MAX 2 x 60 Wattage Type A bulb (bulb not included)**

## IMPORTANT SAFETY INSTRUCTIONS:

THIS PORTABLE LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF IT DOES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS THE PLUG CAN BE FULLY INSERTED. DO NOT ALTER THE PLUG.

**SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.**