



CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



ASSEMBLY INSTRUCTION MODEL #CAL-2405-LG

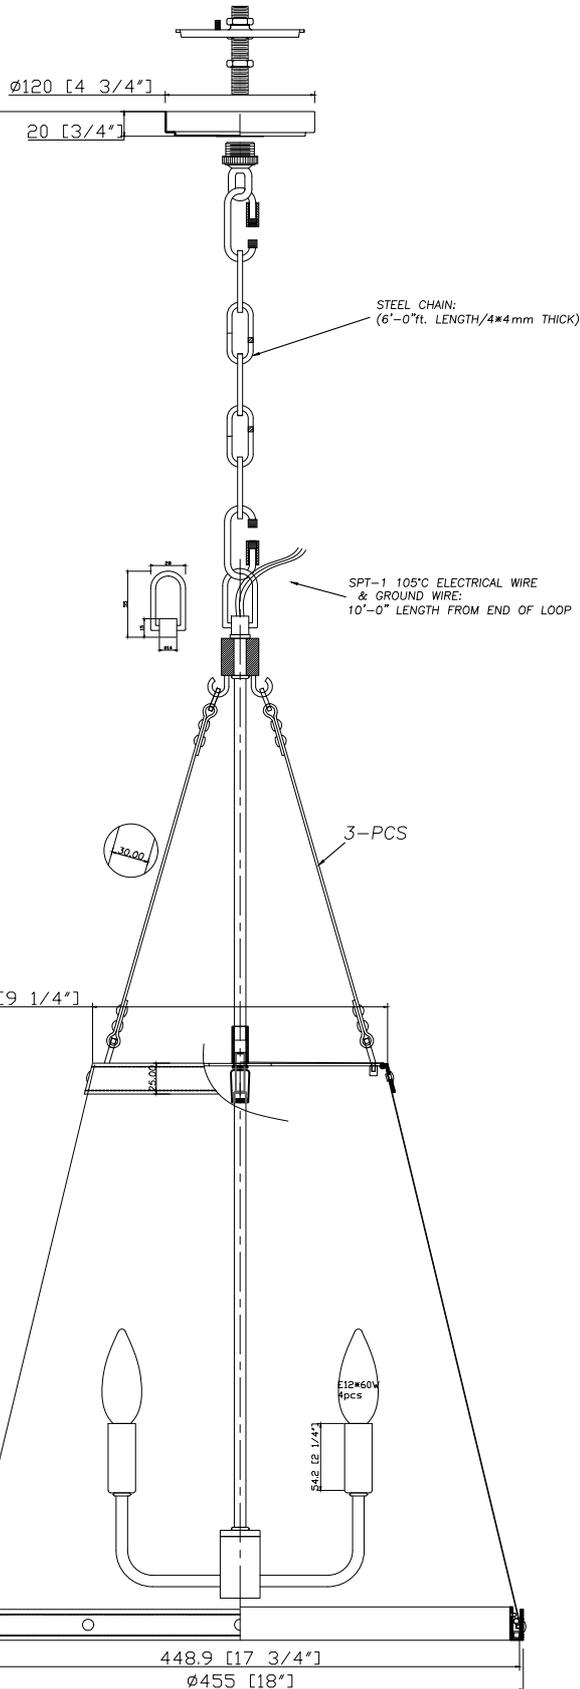

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 4 - Cand. Bulb
40 Watts Recommended 60 Watts Max
USE LED BULBS FOR EXTENDED USE

THIS FIXTURE IS DRY RATED

How to Install

1. Feed the wire through the down rod and insert it onto the coupler on the top of the shade.
2. Take one belt, locate the side with the threaded nipple and insert it through the hole at the top of the shade. Once through, secure the belt from the other side using the cap nut. Repeat this process for each additional belt.
3. Hang the other end of the belt to the hook of the loop kit.
4. Install the mounting bracket onto the outlet box.
5. Decide the preferred hanging height and choose the correct length of chain needed.
6. Raise the fixture up to the ceiling and do the wire connection. Secure the canopy using the collar ring.



WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

2850(112.1/4")

868 [34 1/4"]

467.4 [18 1/2"]

Ø237 [9 1/4"]

30.00

3-PCS

STEEL CHAIN:
(6'-0" LENGTH/4mm THICK)

SPT-1 105°C ELECTRICAL WIRE
& GROUND WIRE:
10'-0" LENGTH FROM END OF LOOP

Ø120 [4 3/4"]

20 [3/4"]

448.9 [17 3/4"]

Ø455 [18"]

E12*60V
40W
4PCS


E12*60V
40W
4PCS

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



ASSEMBLY INSTRUCTION MODEL #CAL-2405-LG

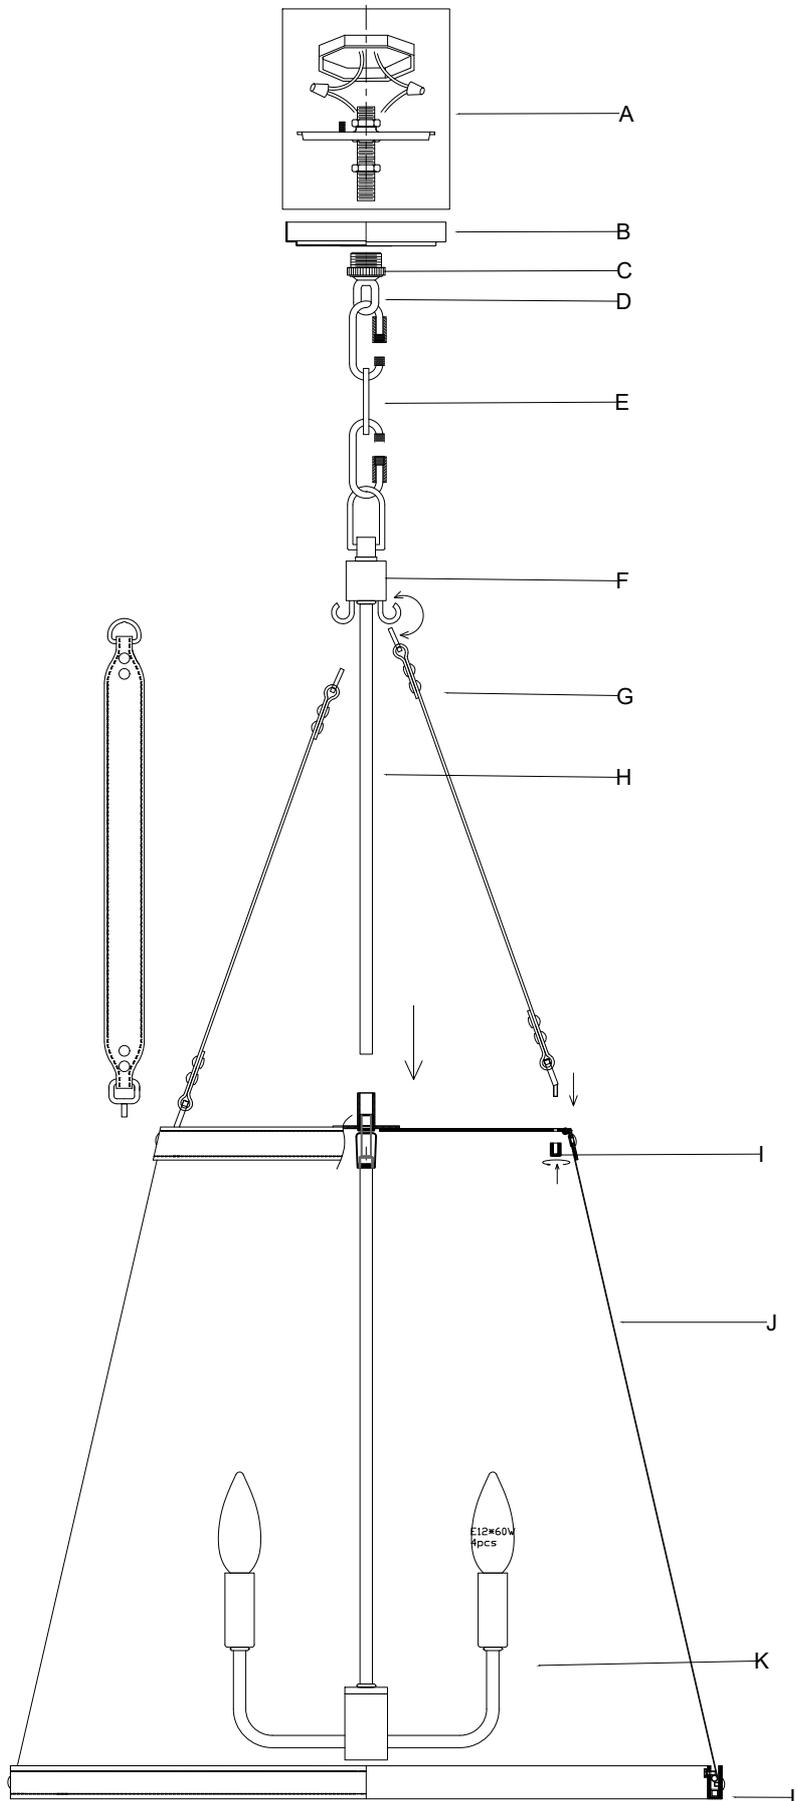

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy (XAR2406LGCAN4.75IN)
- C. (1)-Collar loop ring
- D. (1)-Screw collar loop
- E. (1)-Chain T4MM*L72"
(XAR2406LGCHA4MM)
- F. (1)-Loop Kit
- G. (3)-Belt (XAR2405LGBELT12.5IN)
- H. (1)-down rod
- I. (3)-cap nut
- J. (1)-fabric shade
(XAR2405LGSHA18.5IN)
- K. (1)-light cluster
- L. (1)-Banding ring