

ASSEMBLY INSTRUCTIONS


ITEM NO: B0-3161FL

CAREFULLY UNPACK AND PLACE ALL PARTS
ON A SMOOTH SURFACE.

1. INTALL POLE (H) TO BASE (J) AND ARC PART (G) TO POLE (H).
2. TIGHTEN THE HEX-SCREW AT THE BOTTOM OF THE BASE (J) WITH THE SPANNER (K) BEFORE ALIGNING SHADE/CORD AT THE SAME DIRECTION.
3. PLACE METAL SHADE (B) INTO SOCKET (A), SECURE AND TIGHTEN WITH SOCKET RING (C).
4. INSTALL RECOMMENDED BULB(D) (NOT INCLUDED).
5. ALIGN GLASS SHADE (E) TO THE BOTTOM OF THE METAL SHADE (B) AND SECURE WITH SCREW (F).
6. INSERT THE PLUG INTO AN OUTLET.

ENJOY YOUR LIGHT!

**USE MAX 60W TYPE A BULB
(BULB NOT INCLUDED)**

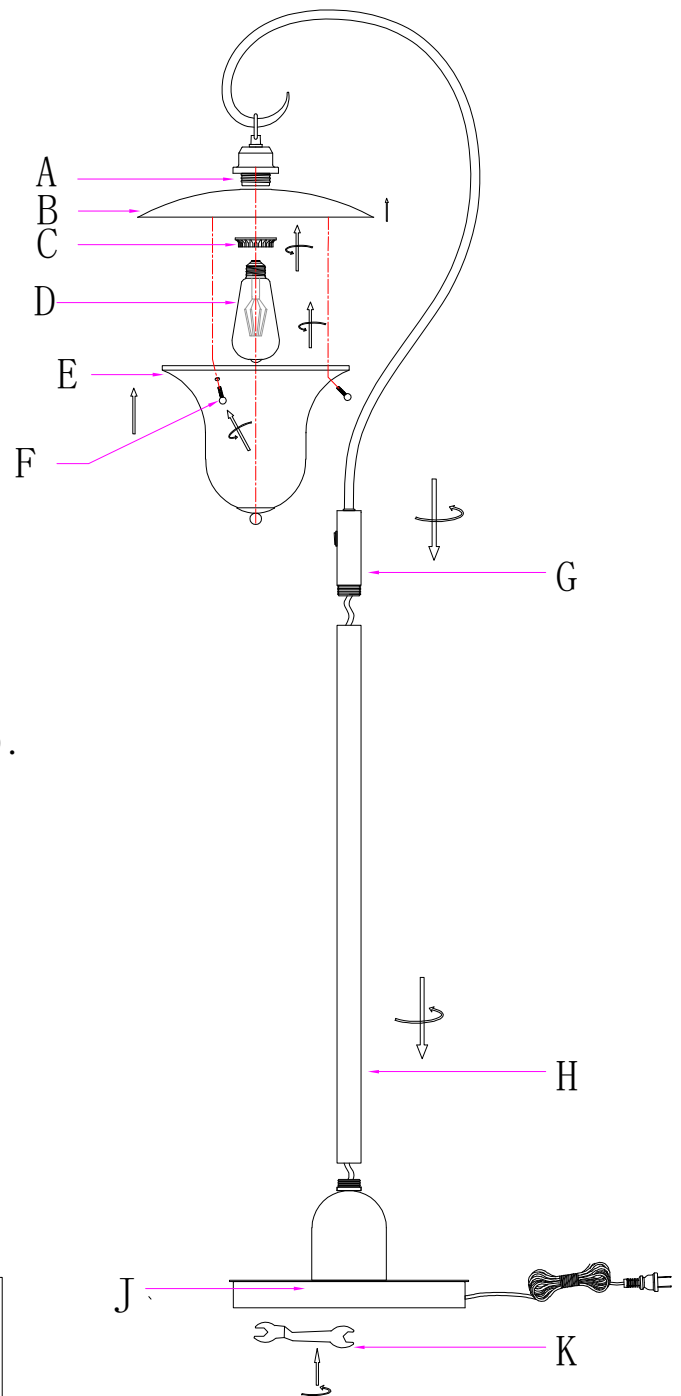

THIS PORTABLE LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A SAFETY FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF IT DOES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS THE PLUG CAN BE FULLY AND EASILY INSERTED. DO NOT ATTEMPT TO ALTER THE PLUG.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.