


CRYSTORAMA LIGHTING



ASSEMBLY INSTRUCTION MODEL #TRL-2805-LG

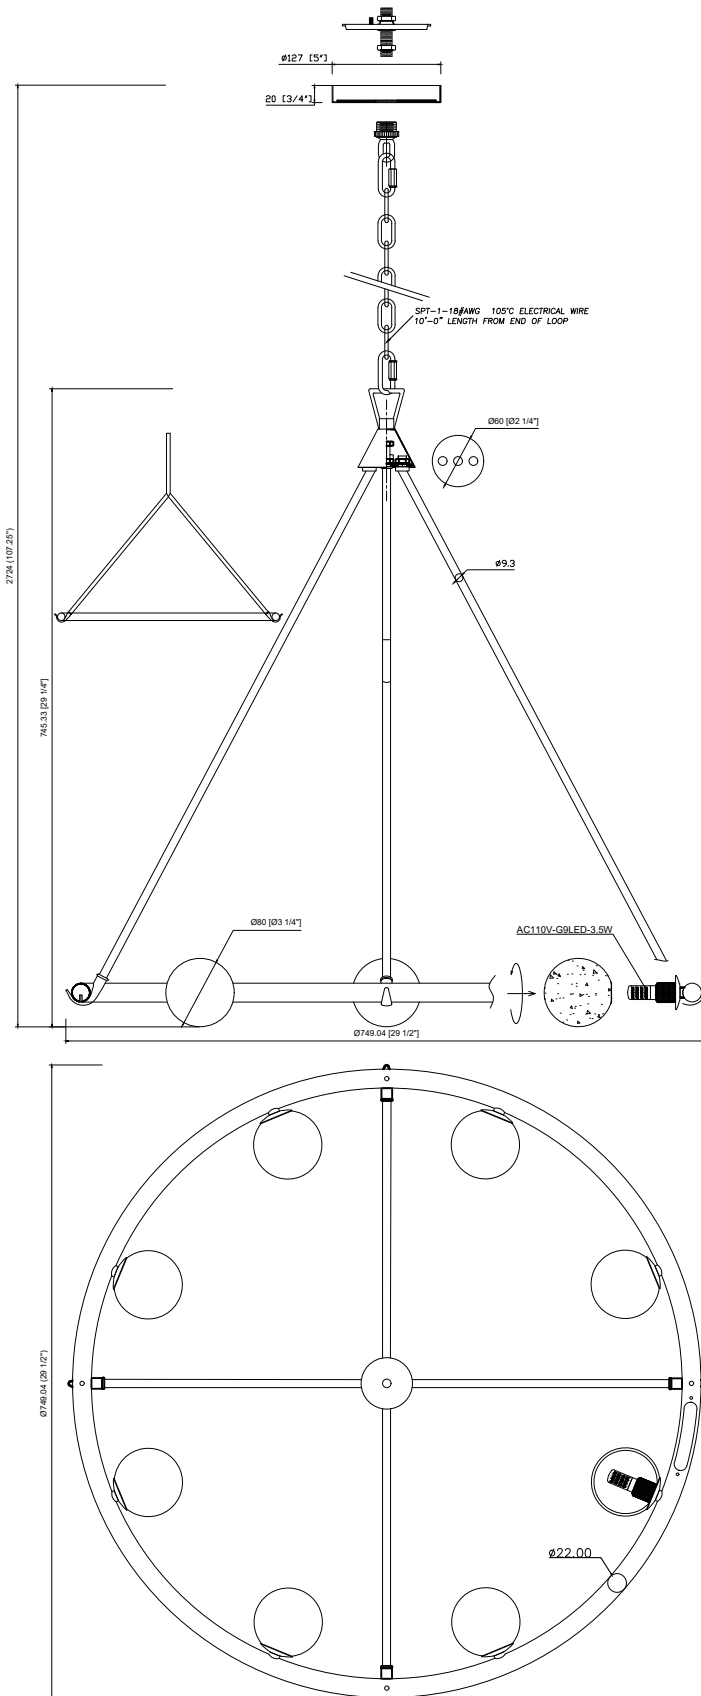

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 8 - 3.5Watts G9 LED bulb included

THIS FIXTURE IS Damp RATED

How to Install


1. Remove the loop to take the distributor box cover off.
2. Take one long rod, locate the side with the threaded nipple and insert it over the metal plate on the distributor box. Secure with the hex nut. (Please do not tighten it until the rod is attached onto the frame ring.)
3. Take one short rod and screw it onto the cluster underneath the distributor box. Repeat this process for the other short rod.
4. Spread all four rods out at equal spacing and remove the flat head screws from the hook end of the rods. Set them aside for use on the next steps.
5. Slide the frame ring onto the rod and make sure the raised stud on the rod's hook fits into the ring. Secure the rod with the flat head screws. Please be careful not to damage the wire in the process of fixing the rod.
6. Tighten the hex nuts to secure the rods, then reinstall the distributor box cover and fasten it with the fixture loop.
7. Decide the preferred hanging height and choose the correct length of chain needed.
8. Install the mounting bracket onto the outlet box.
9. Raise the fixture up to the ceiling and do the wire connection. Secure the canopy using the collar ring.
10. Install the bulb onto the socket.
11. Insert the glass shade into the socket and rotate it clockwise until there is no gap between the glass shade and the bobèche.



WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov




PART NUMBER MODEL #TRL-2805-LG

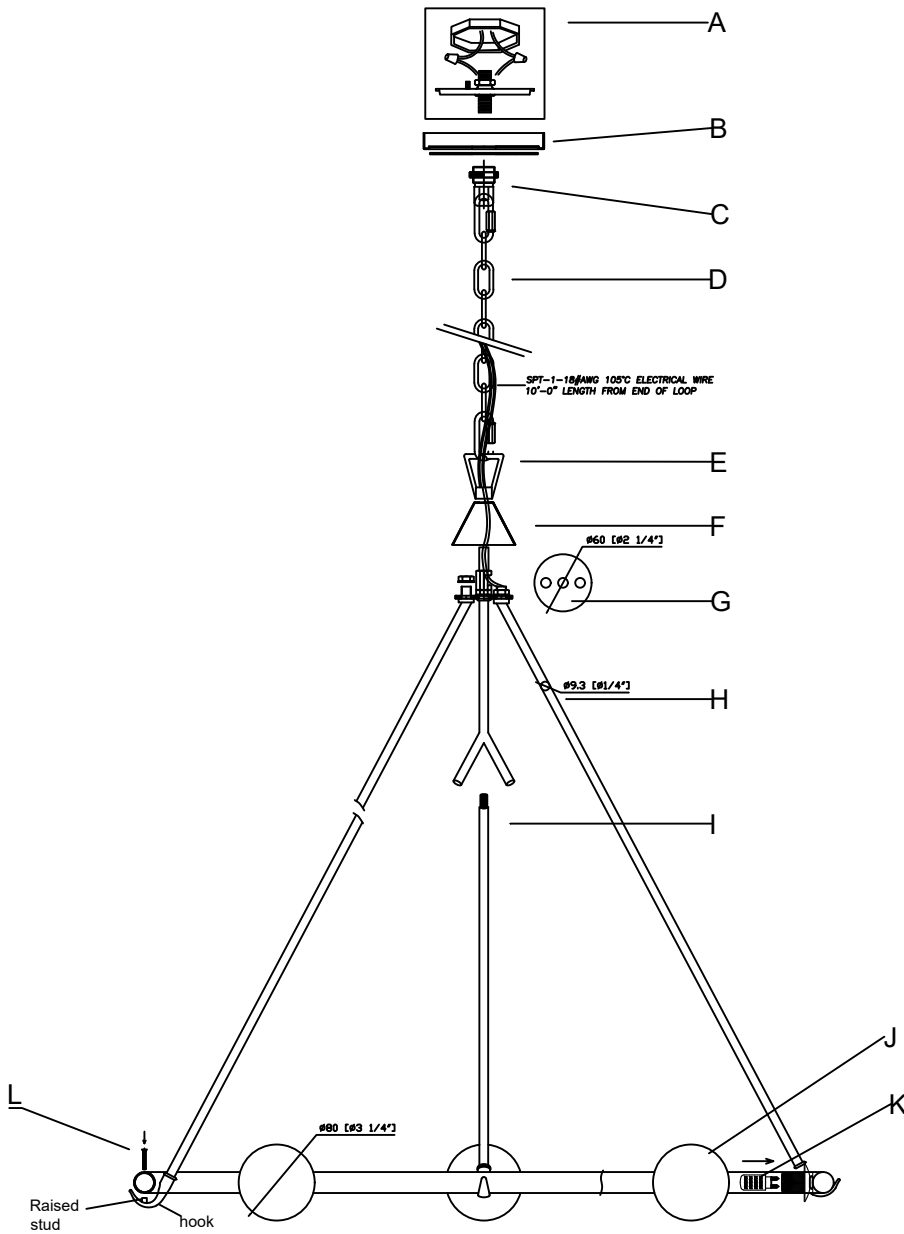

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy(XAR2805LGCAN5IN)
- C. (1)-Collar loop and ring
- D. (1)-Chain (XAR2805LGCHA4MM)
- E. (1)-Loop(XAR2805LGCHA1.75IN)
- F. (1)-Distributor box cover
- G. (1)-Metal plate
- H. (2)-Long Rod (XAR2805LGSHAL28.25IN)
- I. (2)-Short Rod (XAR2805LGSHAL21IN)
- J. (8)-Glass(XAR2807LGGLA3.25IN)
- K. (8)-G9-LED bulb
- L. (4)-Flat head screws

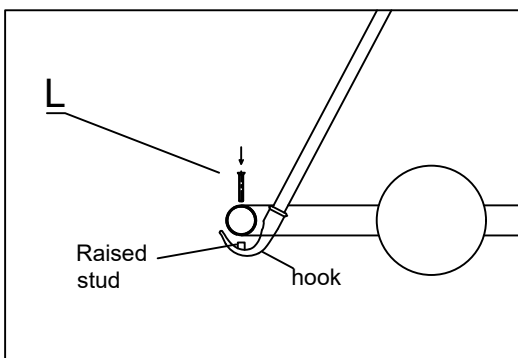

Assembly Diagrams of Rods

