

# ASSEMBLY INSTRUCTIONS


**ITEM NO:** B0-3161TB

CAREFULLY UNPACK AND PLACE ALL PARTS ON A SMOOTH SURFACE.

1. INSERT THREAD (J) INTO BASE (K) CLOSESIE TO TIGHTEN, PUT METAL COVER (H) ON THE BASE (K), INSTALL LIGTHING BODY (G) TO THREAD (J).
2. TIGHTEN THE HEX-SCREW AT THE BOTTOM OF THE BASE (K) WITH THE SPANNER (L) BEFORE ALIGNING SHADE/CORD AT THE SAME DIRECTION. PUT THE FELT PAD (M) AT THE BOTTOM OF THE BASE (K).
3. PLACE METAL SHADE (B) INTO SOCKET (A), SECURE AND TIGHTEN WITH SOCKET RING (C).
4. INSTALL RECOMMENDED BULB(D) (NOT INCLUDED).
5. ALIGN GLASS SHADE (E) TO THE BOTTOM OF THE METAL SHADE (B) AND SECURE WITH SCREW (F).
6. INSERT THE PLUG INTO AN OUTLET.

ENJOY YOUR LIGHT!

**USE MAX 60W TYPE A BULB  
(BULB NOT INCLUDED)**

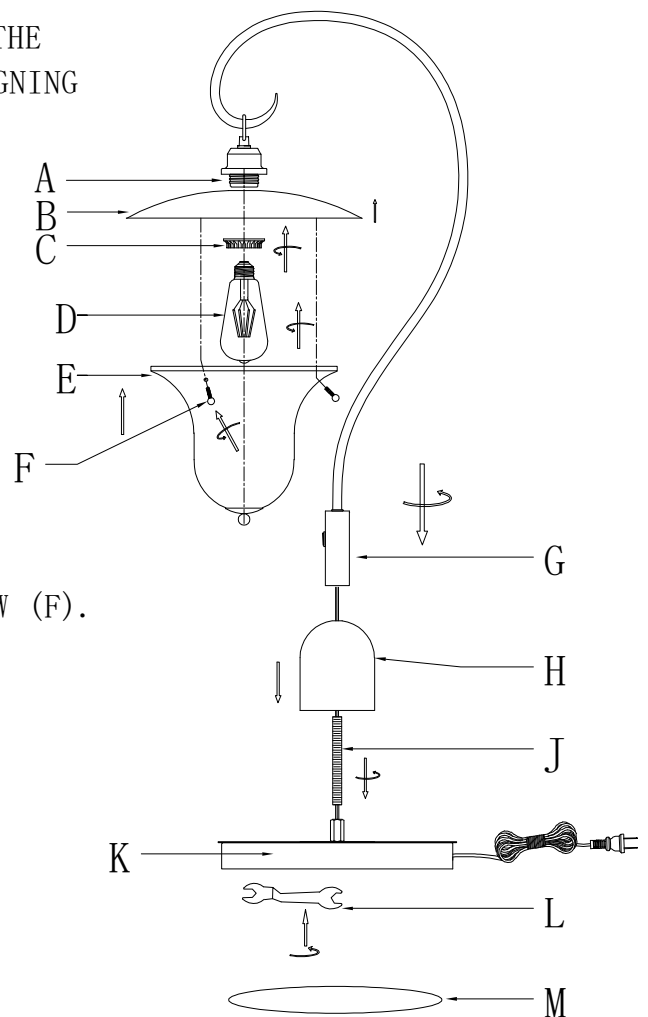

THIS PORTABLE LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A SAFETY FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF IT DOES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS THE PLUG CAN BE FULLY AND EASILY INSERTED. DO NOT ATTEMPT TO ALTER THE PLUG.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.