
ASSEMBLY INSTRUCTIONS

ITEM NO: BO-3165FL

CAREFULLY UNPACK AND PLACE ALL PARTS ON A SMOOTH SURFACE.

- 1. SCREW POLE (B) CLOCKWISE ONTO BASE (A) TO TIGHTEN.
- 2. SCREW POLE (C) CLOCKWISE INTO POLE (B) TO TIGHTEN.
- 3. SCREW POLE (D) CLOCKWISE INTO POLE (C) TO TIGHTEN.
- 4. SCREW SOCKET ASSEMBLY (E) CLOCKWISE INTO THE POLE (D) TO TIGHTEN. GET THE REMAINING SLACK OF THE POWER CORD OUT FROM BASE HOLD.
- 5. SCREW THREADED ROD (F) CLOCKWISE INTO THE SOCEKT ASSEMBLY (E) TO TIGHTEN.
- 6. PUT WASHER (G) ONTO THE THREADED ROD (E).
- 7. PLACE SHADE (H) OVER THE THREADED ROD (F), THEN TIGHTEN FINIAL (I) SECURING THE SHADE IN PLACE.
- 8. INSTALL BULB (NOT INCLUDED) INTO THE SOCKET.
- 9. INSERT THE POWER PLUG INTO AN OUTLET AND ENJOY !!

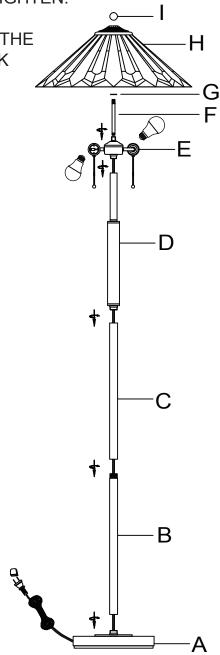

Use MAX 2x60 Wattage type A bulb (Bulb not included)

IMPORTANT SAFETY INSTRUCTIONS:

THIS PORTABLE LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF IT DOES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS THE PLUG CAN BE FULLY INSERTED. DO NOT ALTER THE PLUG.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.