

## INSTALLATION INSTRUCTION

### 875 –LED Wall Sconce

WS-87520

dweLED

**CAUTION:** To prevent electrical shock, ensure electricity has been turned off at the circuit breaker before beginning.

- Read all instructions before installing.
- System is intended for installation by a licensed electrician in accordance with the National Electrical Code (NEC) and local regulations.
- When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.
- Retain installation instructions for future maintenance reference.

**WARNING:** All parts must be used as indicated in these instructions. This product is designed for use only with the supplied parts and/or accessories designated for use by dweLED. Substitution of parts or accessories not designated for use with this product by dweLED could result in personal injury or property damage, and will void the warranty. Contact an authorized dealer or the manufacturer if any parts are damaged or missing.

**MAINTENANCE NOTE:** Coastal conditions may cause mineral and residue build-up on the fixture. We recommend that customers in coastal areas clean all external surfaces of the fixture once every two weeks with a wet cloth.

**MISE EN GARDE:** Pour éviter tout choc électrique, assurez-vous que le disjoncteur soit mis hors tension avant de commencer.

- Lisez toutes les instructions avant l'installation.
- Le système doit être installé par un électricien licencié conformément au code national de l'électricité (NEC), et également aux règlements locaux.
- Lors de la manipulation du luminaire, n'appuyez pas sur les LED. Tenez-le uniquement par la base.

**ATTENTION:** Toutes les pièces doivent être utilisées comme indiqué dans ces instructions. Ce produit est conçu pour être utilisé seulement avec les pièces et/ou accessoires fournis pour être utilisés avec les produits dweLED. Remplacer des pièces ou accessoires non conçus pour ce produit dweLED pourrait causer des dommages corporels ou matériels et pourrait également causer l'annulation de la garantie. Veuillez contacter un revendeur autorisé ou le fabricant si des pièces manquent ou sont endommagées.

**NOTE D'ENTRETIEN:** Les conditions côtières peut causer une accumulation de minéraux et de résidue sur le luminaire. Nous recommandons aux clients qui résident dans les zones côtières de nettoyer toutes les surfaces externes du luminaire une fois toutes les deux semaines avec un chiffon humide.

## HARDWARE

A



Wire Connector  
Qty: 3pcs+1Extra

B



Mounting Screw  
Qty: 1 Extra

C



Allen Screw  
Qty:1 Extra

D



Allen Wrench  
Qty:1 pc

E



Junction box screw  
Qty:2PCS+ 1 Extra

## PREPARATION

1. Shut off the power at the circuit breaker and remove existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.

Wacightingcom  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760



# INSTALLATION INSTRUCTION

## 875 –LED Wall Sconce

### WS-87520

dweLED

#### MOUNTING THE FIXTURE (Fig. 1)

- Remove the mounting screw (B) from the mounting back plate.
- (i) The lamp can switch between four color temperatures (2700K-3000K-3500K-4000K), which can be adjusted to your preference with the switch mounted in the canopy. (Fig.3).  
Note: the switch comes with removable protective cover, Remove the cover prior to making adjustment, Reinstall the cover after adjustment is made.  
(ii) Fixture must be powered off to adjust the CCT setting, after each CCT adjustment turn power on to show new CCT setting .
- Twist lock the shade onto the lamp body . Secure it using Allen screw (C) and Allen wrench (D) provided  
RPL-GLA-875-1 for WS-87520-30-BK  
RPL-GLA-875-2 for WS-87520-30-BN

#### CONNECTING THE WIRES (Fig. 2, Fig.3)

- Connect the driver input wires to junction box as shown in Fig .2. Making sure th all wire connectors (A) are secured. If your outlet box has a green or bare copper ground wire, connect the fxture's ground wire to it. Otherwise, connect the fxture's ground wire directly to the back plate using the GND screw provided. After wires are connected, tuck them carefully inside the junction box.  
**Note** :the switch comes with a detachable cover, remove the cover prior to adjusting the color temperature, reattach the cover after adjustment is made.

#### COMPLETING THE INSTALLATION (Fig. 1)

- Secure the fixture to the mounting back plate using the mounting screw (B).

**Note:** If silicone deformation, need to be manually adjusted

Back Plate Dimensions

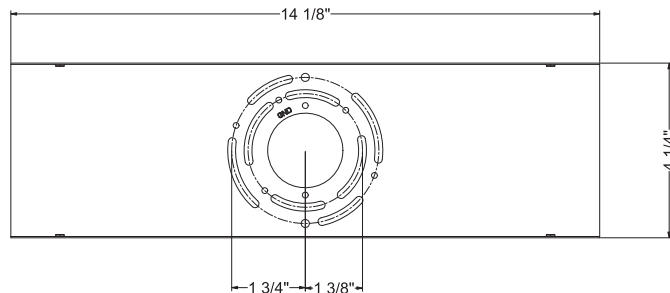


Fig. 2 Wiring

|  |                                            |                                                     |
|--|--------------------------------------------|-----------------------------------------------------|
|  | <b>Fixture Wires</b><br>Black or Smooth    | <b>House Wires</b><br>Black (Hot)                   |
|  | <b>Fixture Wires</b><br>White or Ribbed    | <b>House Wires</b><br>White (Neutral)               |
|  | <b>Fixture Wires</b><br>Bare wire (Ground) | <b>House Wires</b><br>Green or Bare Copper (Ground) |

Fig.3 Driver Wires


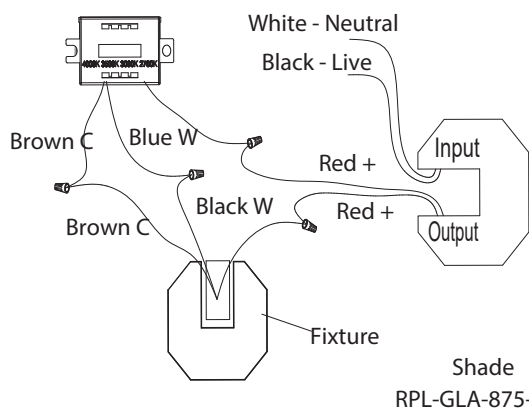


Fig.1

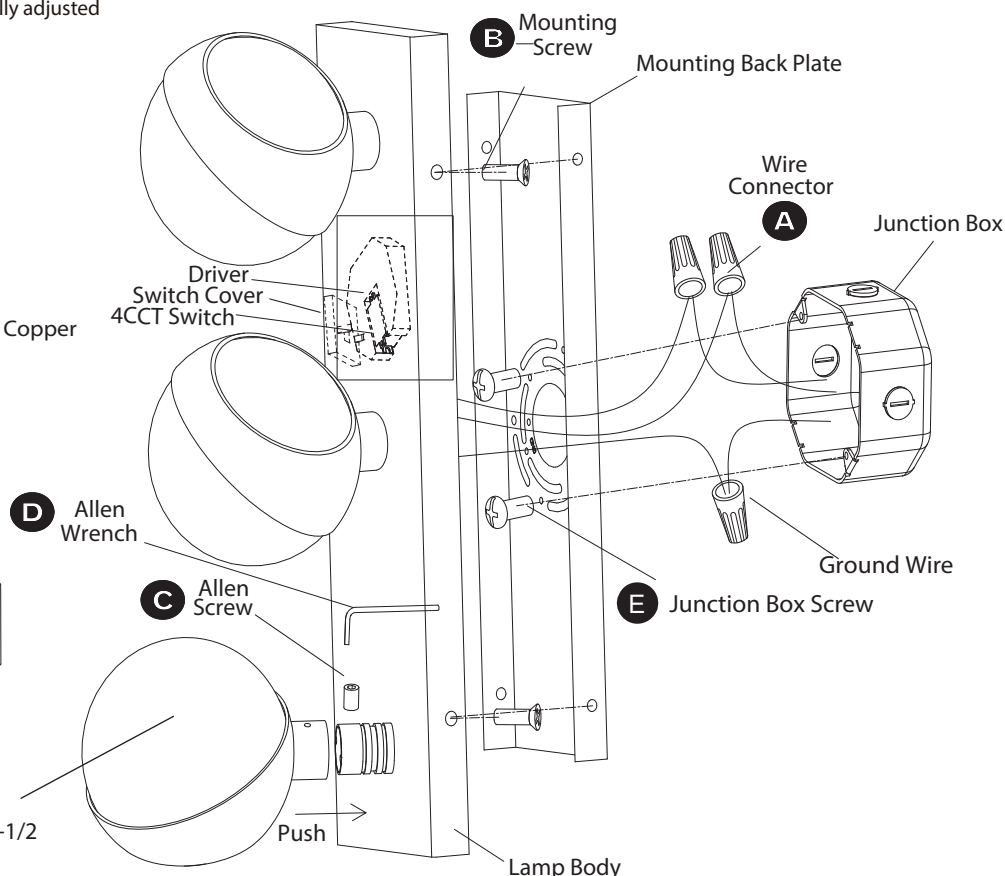

Wacightingng.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760



## INSTALLATION INSTRUCTION

### 875 –LED Wall Sconce

WS-87533

dweLED

**CAUTION:** To prevent electrical shock, ensure electricity has been turned off at the circuit breaker before beginning.

- Read all instructions before installing.
- System is intended for installation by a licensed electrician in accordance with the National Electrical Code (NEC) and local regulations.
- When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.
- Retain installation instructions for future maintenance reference.

**WARNING:** All parts must be used as indicated in these instructions. This product is designed for use only with the supplied parts and/or accessories designated for use by dweLED. Substitution of parts or accessories not designated for use with this product by dweLED could result in personal injury or property damage, and will void the warranty. Contact an authorized dealer or the manufacturer if any parts are damaged or missing.

**MAINTENANCE NOTE:** Coastal conditions may cause mineral and residue build-up on the fixture. We recommend that customers in coastal areas clean all external surfaces of the fixture once every two weeks with a wet cloth.

**MISE EN GARDE:** Pour éviter tout choc électrique, assurez-vous que le disjoncteur soit mis hors tension avant de commencer.


- Lisez toutes les instructions avant l'installation.
- Le système doit être installé par un électricien licencié conformément au code national de l'électricité (NEC), et également aux règlements locaux.
- Lors de la manipulation du luminaire, n'appuyez pas sur les LED. Tenez-le uniquement par la base.

**ATTENTION:** Toutes les pièces doivent être utilisées comme indiqué dans ces instructions. Ce produit est conçu pour être utilisé seulement avec les pièces et/ou accessoires fournis pour être utilisés avec les produits dweLED. Remplacer des pièces ou accessoires non conçus pour ce produit dweLED pourrait causer des dommages corporels ou matériels et pourrait également causer l'annulation de la garantie. Veuillez contacter un revendeur autorisé ou le fabricant si des pièces manquent ou sont endommagées.

**NOTE D'ENTRETIEN:** Les conditions côtières peut causer une accumulation de minéraux et de résidus sur le luminaire. Nous recommandons aux clients qui résident dans les zones côtières de nettoyer toutes les surfaces externes du luminaire une fois toutes les deux semaines avec un chiffon humide.

## HARDWARE

A



Wire Connector  
Qty: 3pcs+1Extra

B



Mounting Screw  
Qty: 1 Extra

C



Allen Screw  
Qty:1 Extra

D



Allen Wrench  
Qty:1 pc

E



Junction box screw  
Qty:2PCS+ 1 Extra

## PREPARATION

1. Shut off the power at the circuit breaker and remove existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.

Wac Lighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760



# INSTALLATION INSTRUCTION

## 875 –LED Wall Sconce


### WS-87533

dweLED

#### MOUNTING THE FIXTURE (Fig. 1)

- Remove the mounting screw (B) from the mounting back plate.
- (i) The lamp can switch between four color temperatures (2700K-3000K-3500K-4000K), which can be adjusted to your preference with the switch mounted in the canopy. The switch comes with removable protective cover, Remove the cover prior to making adjustment, Reinstall the cover after adjustment is made.  
(ii) Fixture must be powered off to adjust the CCT setting, after each CCT adjustment turn power on to show new CCT setting.
- Twist lock the shade onto the lamp body. Secure it using Allen screw (C) and Allen wrench (D) provided  
RPL-GLA-875-1 for WS-87533-30-BK  
RPL-GLA-875-2 for WS-87533-30-BN

Black Plate Dimensions  
Fig. 3

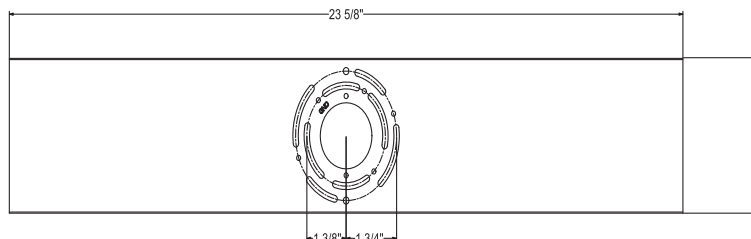

#### CONNECTING THE WIRES (Fig. 2, Fig. 3)

- Connect the driver input wires to junction box as shown in Fig. 2. Making sure that all wire connectors (A) are secured. If your outlet box has a green or bare copper ground wire, connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the back plate using the GND screw provided. After wires are connected, tuck them carefully inside the junction box.  
**Note:** the switch comes with a detachable cover, remove the cover prior to adjusting the color temperature, reattach the cover after adjustment is made.

#### COMPLETING THE INSTALLATION (Fig. 1)



- Secure the fixture to the mounting back plate using the mounting screw (B).

**Note:** If silicone deformation, need to be manually adjusted

Fig. 2 Wiring

| Fixture Wires      | House Wires                   |
|--------------------|-------------------------------|
| Black or Smooth    | Black (Hot)                   |
| Fixture Wires      | House Wires                   |
| White or Ribbed    | White (Neutral)               |
| Fixture Wires      | House Wires                   |
| Bare wire (Ground) | Green or Bare Copper (Ground) |

Fig. 3 Driver Wires

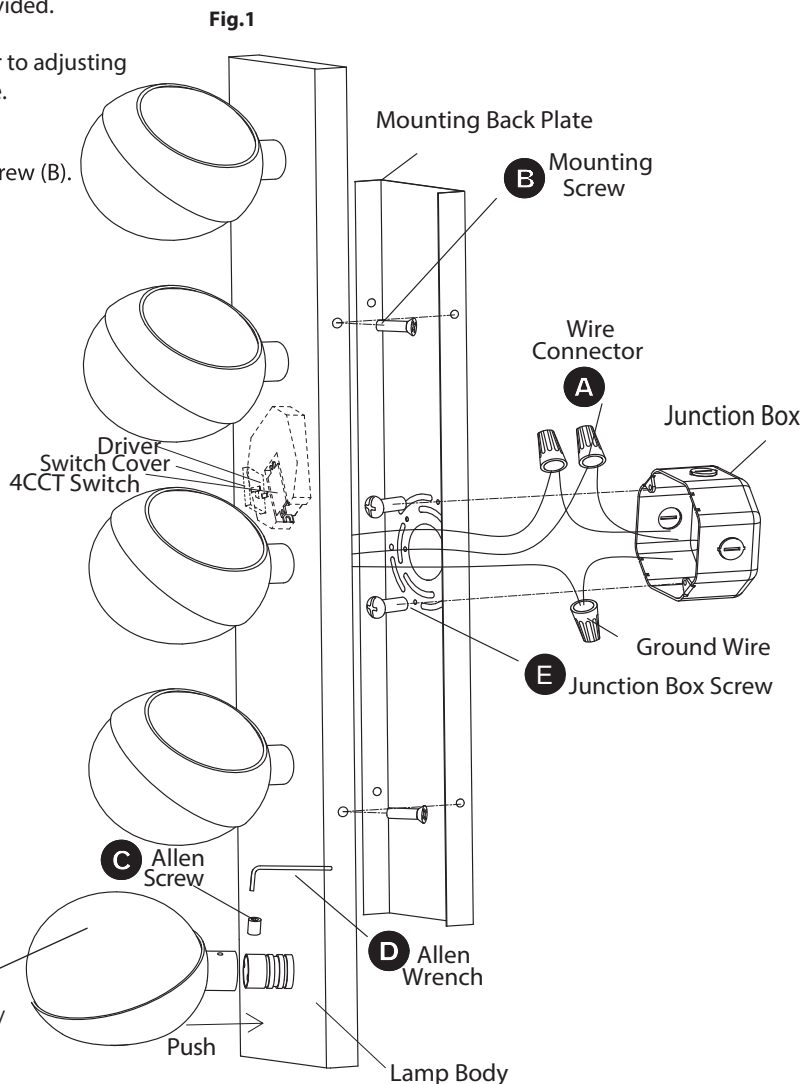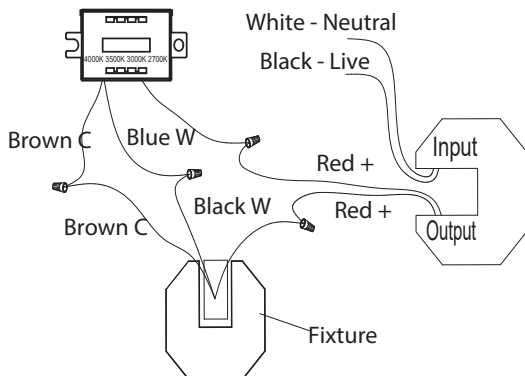

Wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

