


ELEGANT

FURNITURE & LIGHTING™

Three-layer lamp body assembly and installation manual

2502G46L3BK

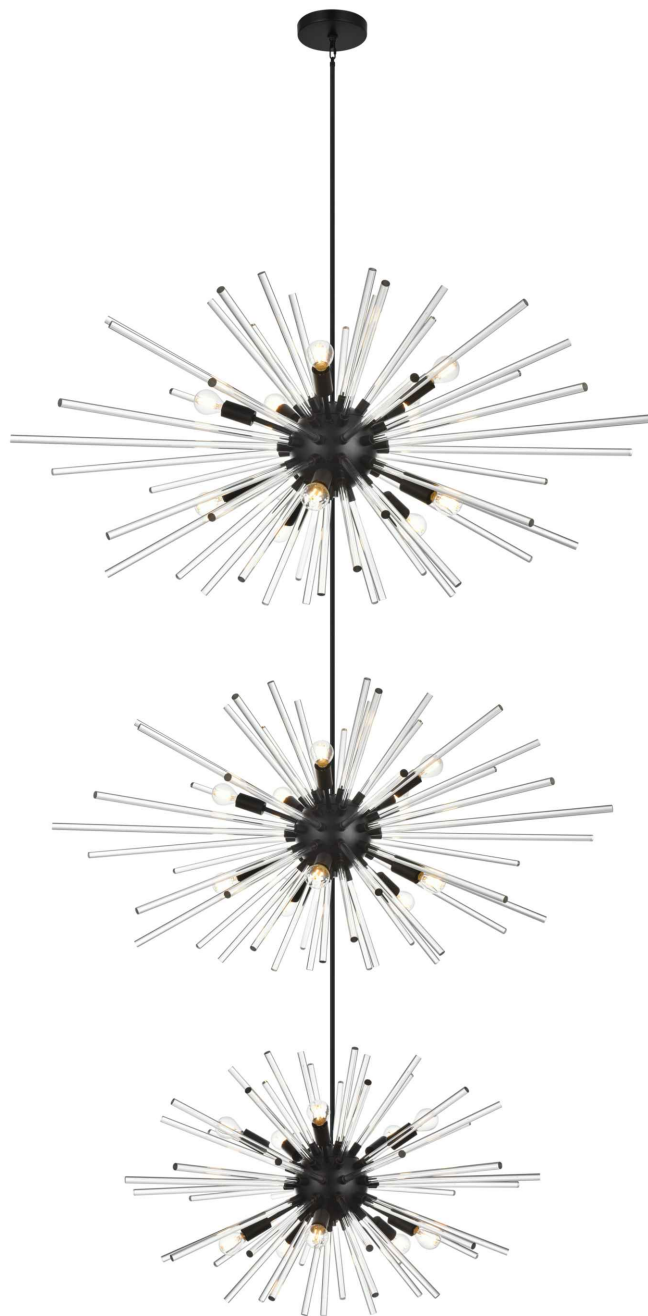

Thank you for choosing our product(s).

Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation.

If you have any questions, please contact the retailer Where the purchased was made.

SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF. BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.

CAUTION


- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 - 130V/60Hz
- Labeled wires are “L” for live wire, “N” for neutral wire, “E” for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions.

where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

Frame Assembly Diagram



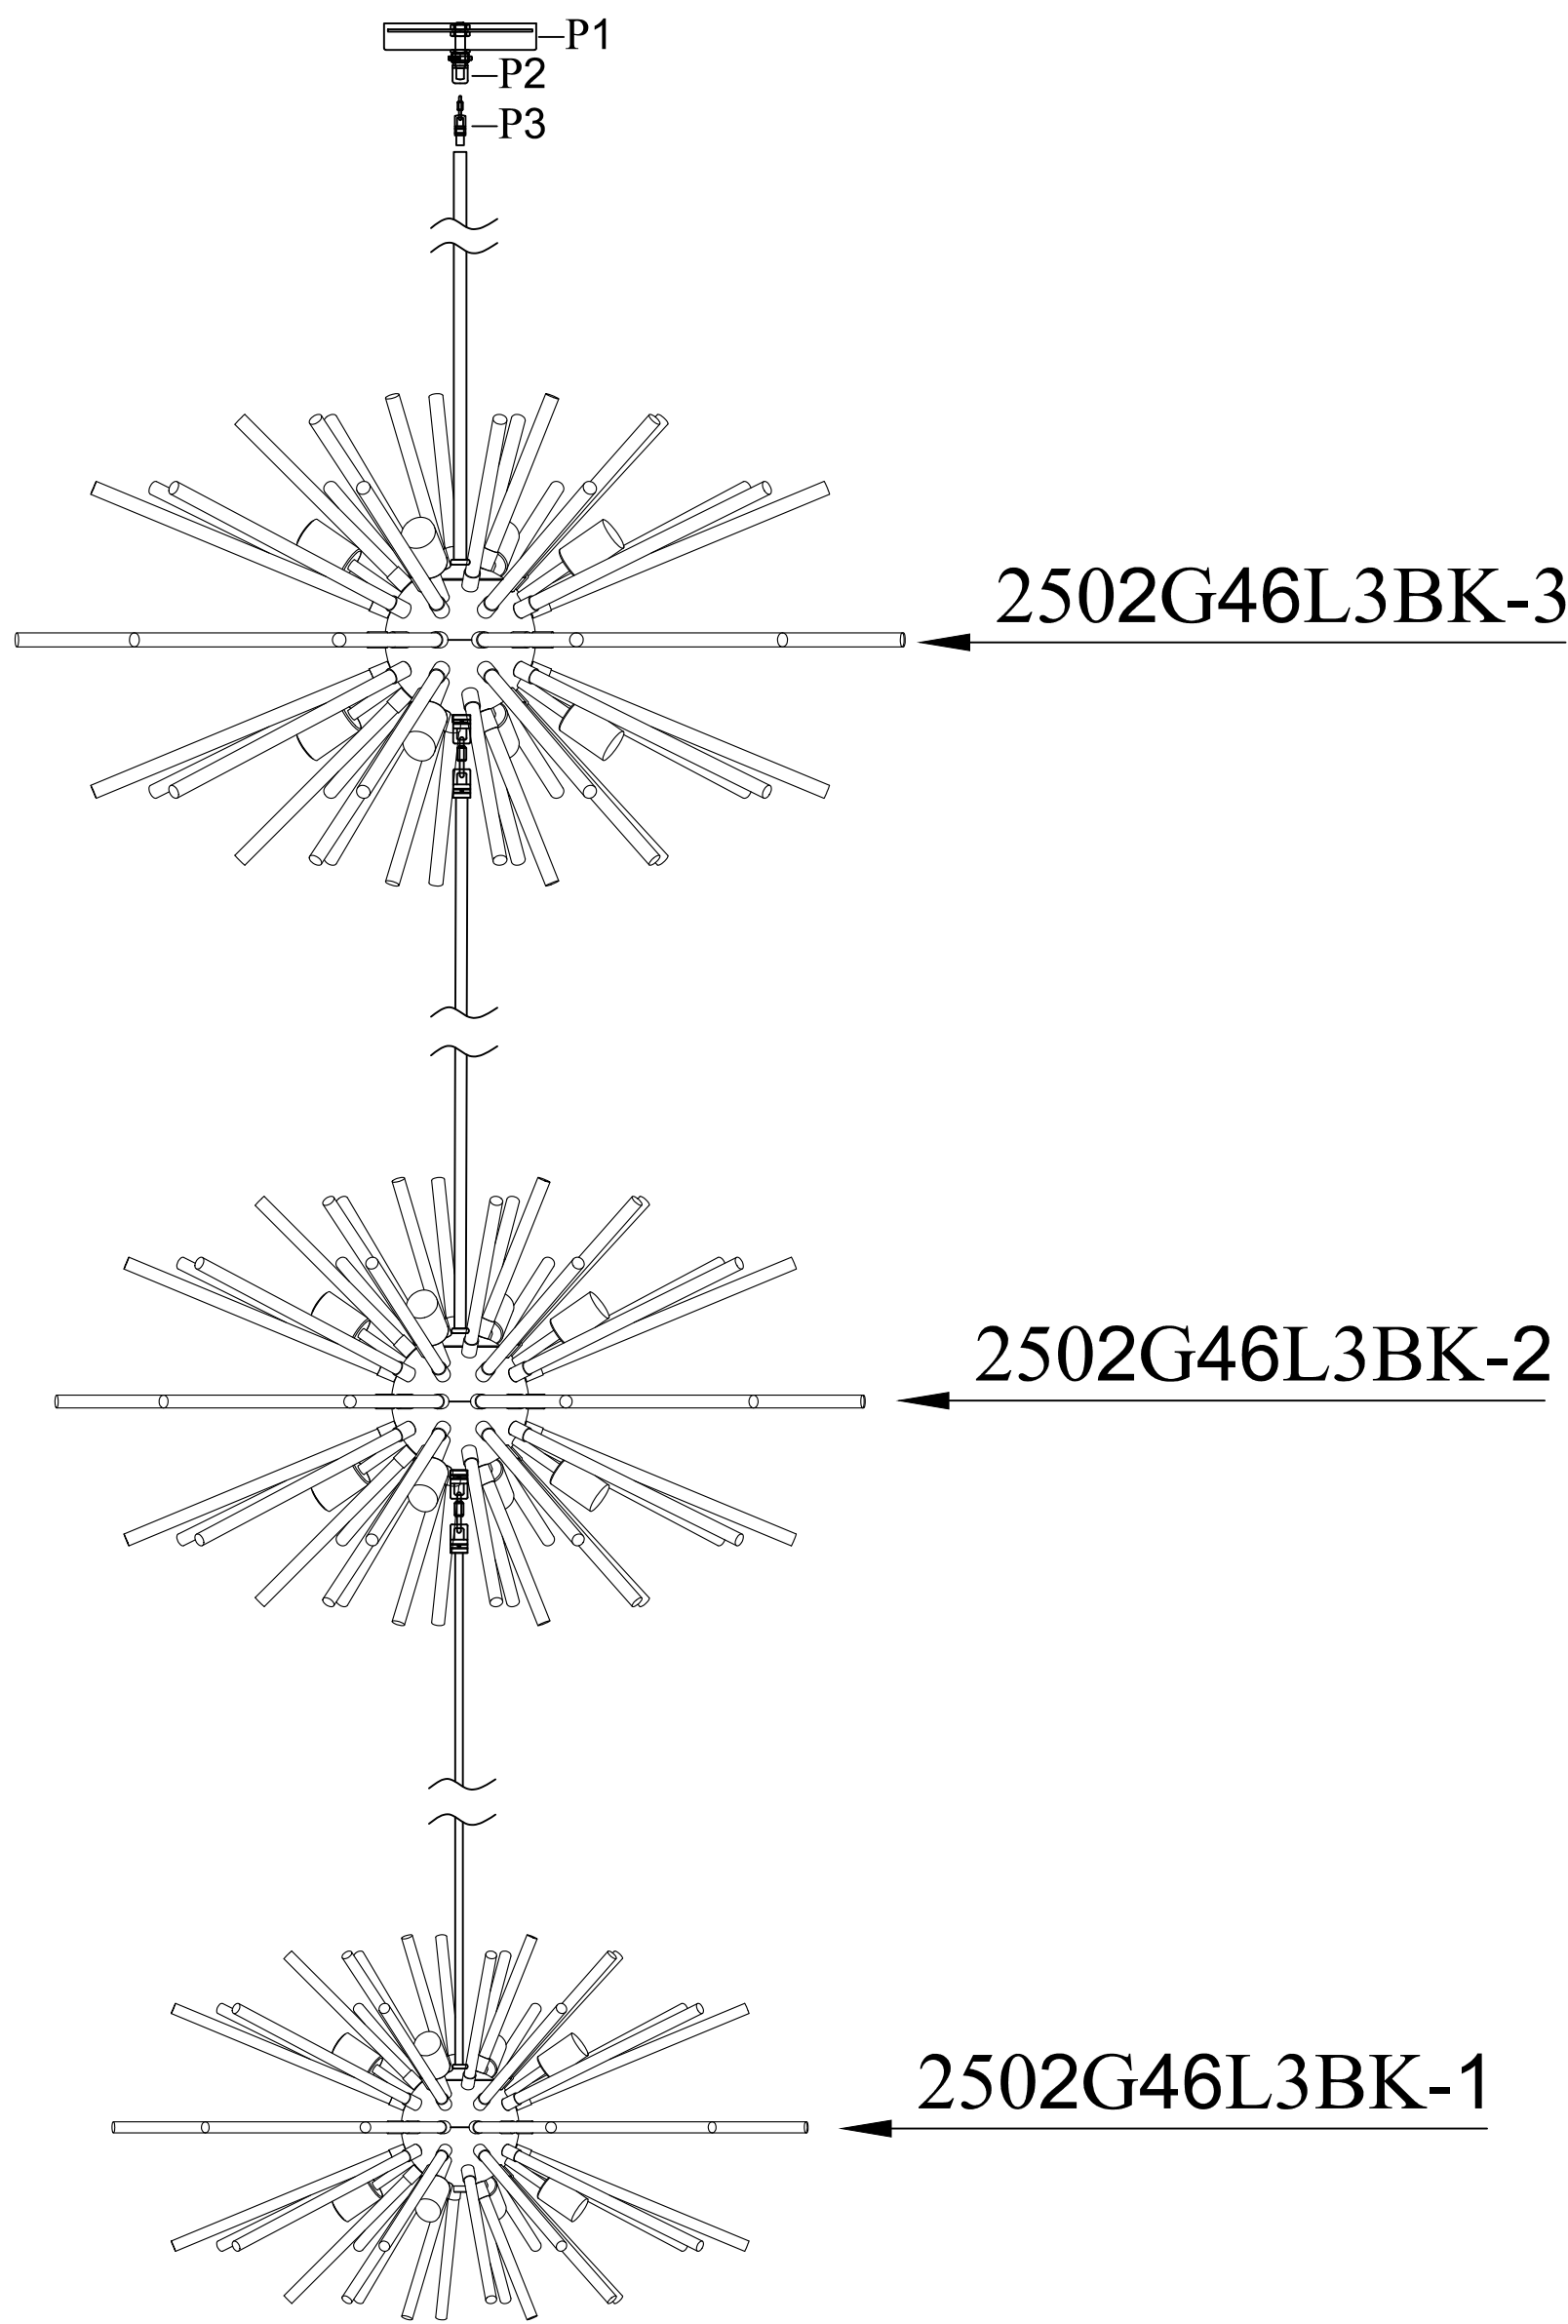










2502G46L3BK

Step 1

Please use the parts list to ensure you are not missing any parts.


Assemble three layer lamp body parts list

Parts Number	Part	Picture	Description	Qty
P-2502G46L3BK-P1	P1		Canopy ($\phi 7.9''$)	1
P-2502G46L3BK-P2	P2		Mounting bracket ($\phi 7.5''$)	1
P-2502G46L3BK-P3	P3		Bucket ring+Activity buckle	3
P-2502G46L3BK-P4	P4		Mounting bracket screw	4
P-2502G46L3BK-P5	P5		The Junction Caps	6
P-2502G46L3BK-Z1	Z1		$\phi 1.7''$ Circular gasket	2
P-2502G46L3BK-Z2	Z2		$\frac{5}{8}''$ Hexagon nut	3
P-2502G46L3BK-Z3	Z3		$\frac{5}{8}''$ Threaded rod (L12")	1
P-2502G46L3BK-Z4	Z4		Heavy duty hickey (L2") ($\frac{5}{8}''$ and $\frac{1}{4}-18''$)	1
P-2502G46L3BK-Z5	Z5		$\frac{1}{4}-18''$ Hexagon nut	3
P-2502G46L3BK-Z6	Z6		$\frac{1}{4}-18''$ Threaded rod (L3.14")	1

2502G46L3BK

Step 2

Please open the 2502G46L3BK-3,2502G46L3BK-2,2502G46L3BK-1 carton one by one, and take out three lamp bodies and assemble the lamp bodies according to the instructions in each carton.

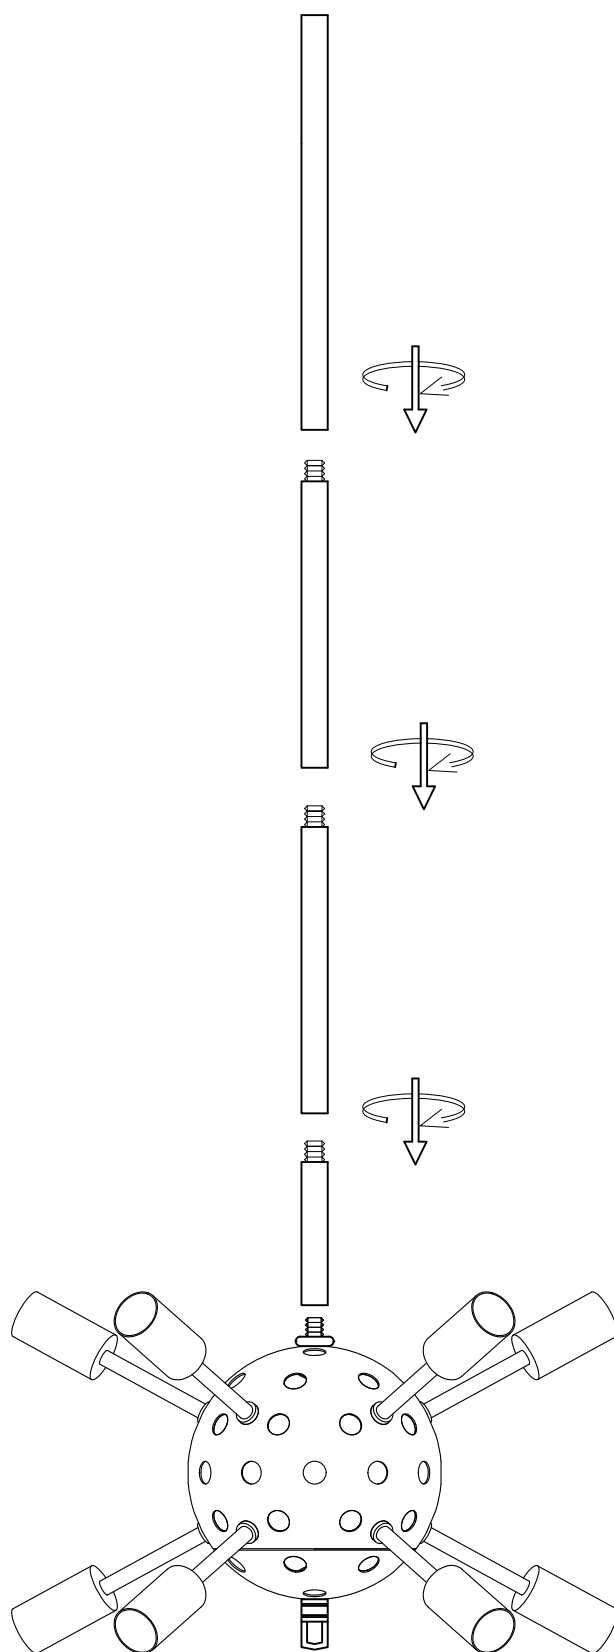

1. Install rods , lamp body.


2. Note: The length of the mounting rod is adjusted according to the height you need!!!

2502G46L3BK


IMPORTANT:Test sockets with bulb before dressing the fixture.

Step 3

- ① :Attach the (P2) plate to the ceiling with four (P4) screws.
- ② :Twist (P3) to the rod of the 2502G46L3BK-3 lamp body, and pass the (P1) suction top plate through the rod, and then use the adjustable buckle to the (P2) hanging plate.
- ③:Thread the power cord under the plate, then wired
- ④: Finally, lock the disc of (P1) with a nut.

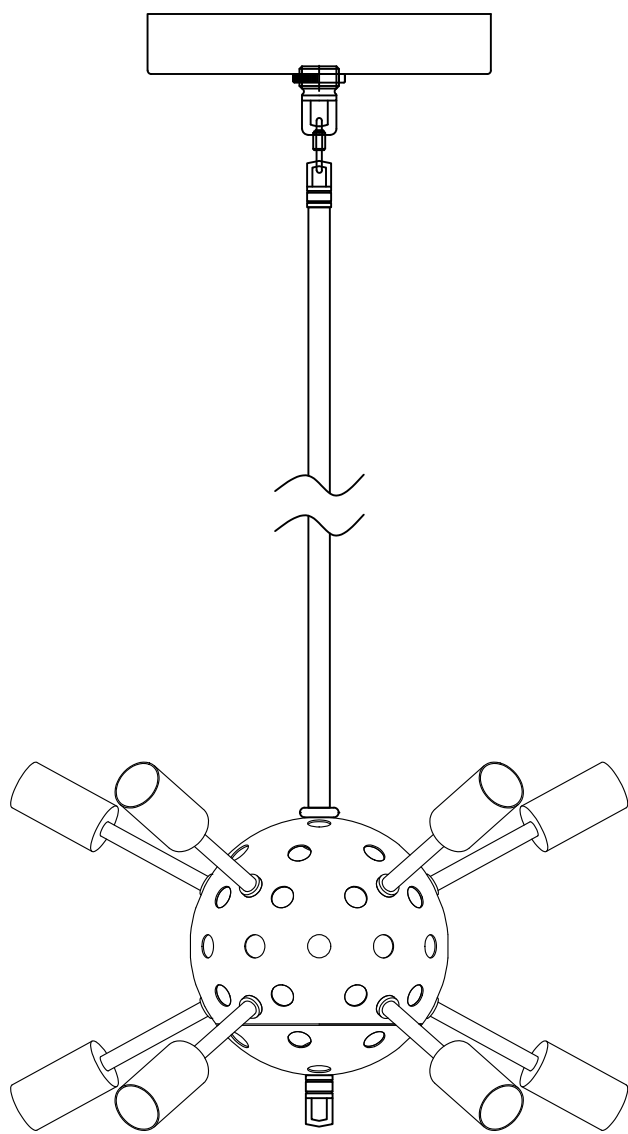

2502G46L3BK-3 lamp body
complete assembly diagram

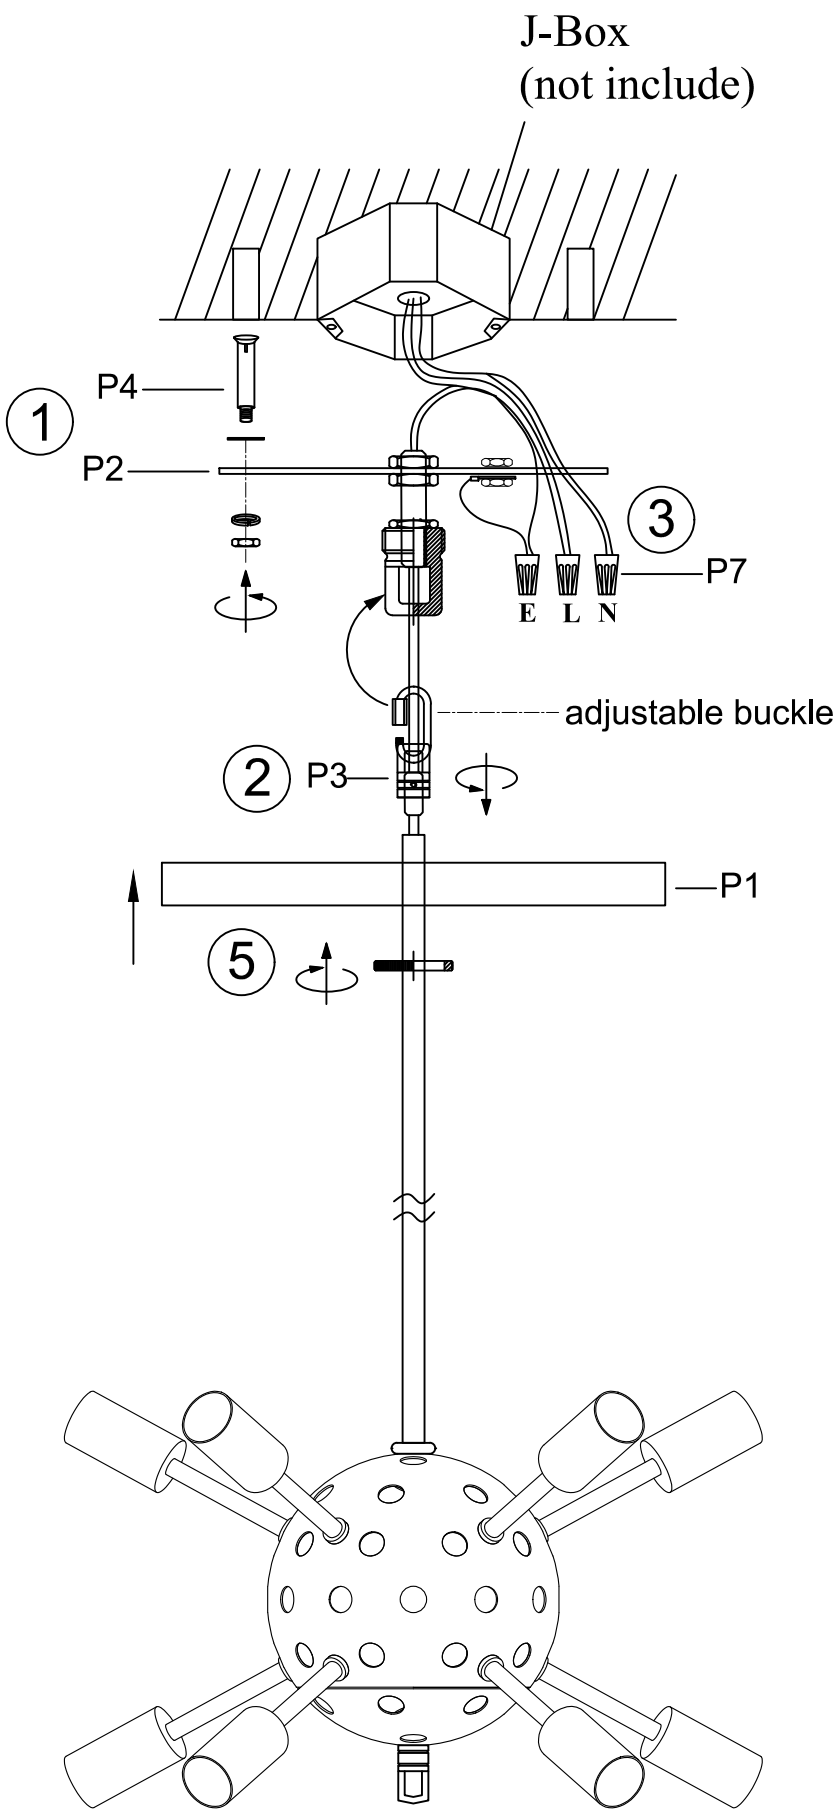

2502G46L3BK-3 lamp body

"L"=Hot wire

"N"=Neutral wire


"E"=GND

2502G46L3BK

IMPORTANT: Test sockets with bulb before dressing the fixture.

Canopy Instation Instrustion

- ①: Drill a 0.7" hole in the ceiling reinforcement to allow a $\frac{5}{8}$ " threaded rod to pass through.
- ②: Attach the electrical box to the ceiling reinforcement and pass the $\frac{5}{8}$ " threaded rod through the box and secure it to the heavy duty hickey.
- ③: Pass the fixture wires and ground wire through the loop, canopy ring, center hole of canopy and the heavy duty hickey.
- ④: Pull ceiling wires down through the fixture box and make connection.
- ⑤: Screw loop only onto threaded pipe.
- ⑥: Hang the fixture on chain.
- ⑦: Secure the canopy with canopy ring.

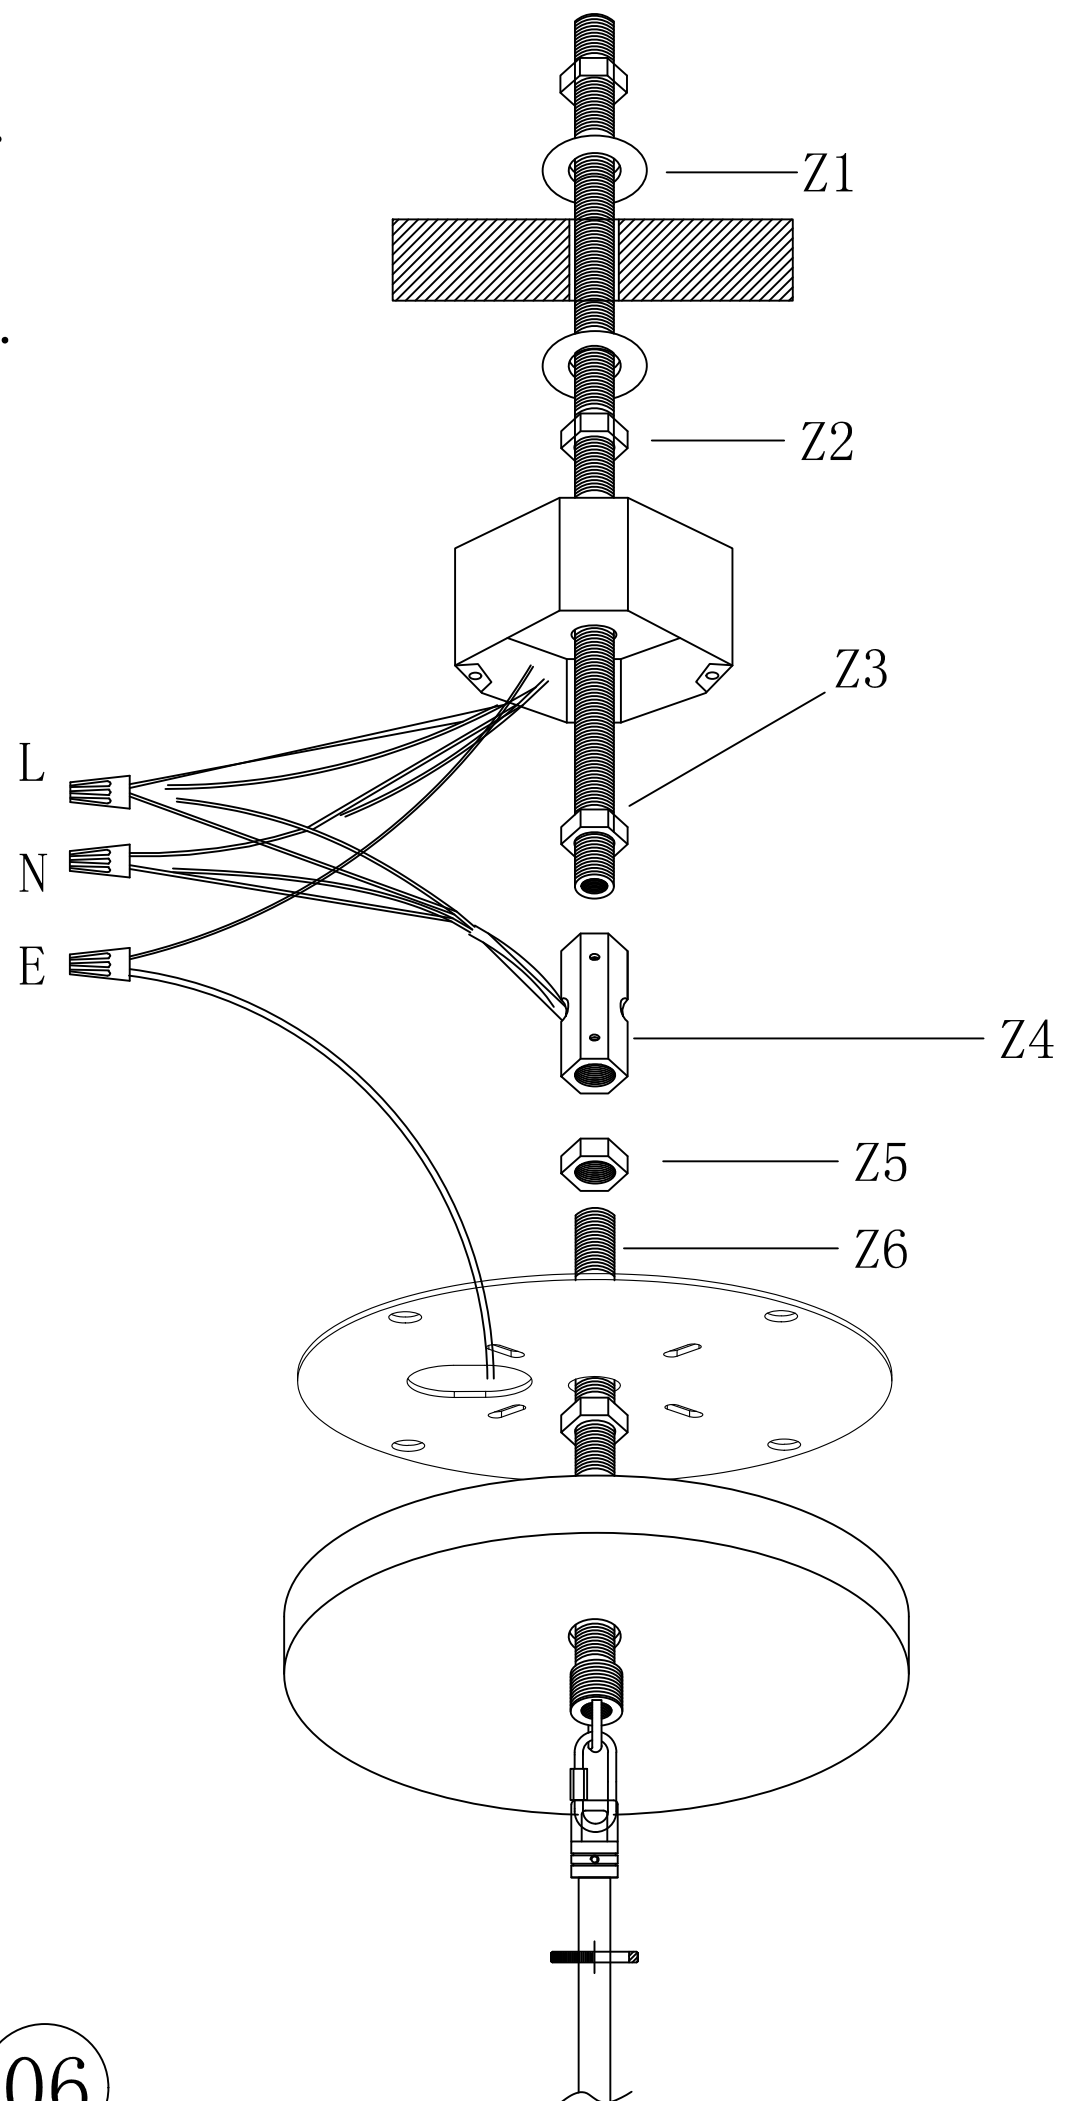

"L"=Hot wire

"N"=Neutral wire





"E"=GND

2502G46L3BK

Note:After you have assembled the 2502G46L3BK-3 lamp body, you can proceed to the next assembly!!!

Step 4

- ① : Take the 2502G46L3BK-2 lamp body and twist (P3) into the rod.
- ② : Twist off the metal part of the 2502G46L3BK-3 lamp body to open the ball cover, and thread the 2502G46L3BK-2 wire into the 2500G50L3BK-3 lamp body, find the wiring cap in the lamp body and connect the two wires together.
- ③ : Tighten the ball cover with the metal part, plug the excess wire into the 2502G46L3BK-3 lamp body, and then use the adjustable buckle to fasten the metal part, and finally use the (P6)M4 wrench to tighten the M4 screw in the corresponding hole on the metal part.

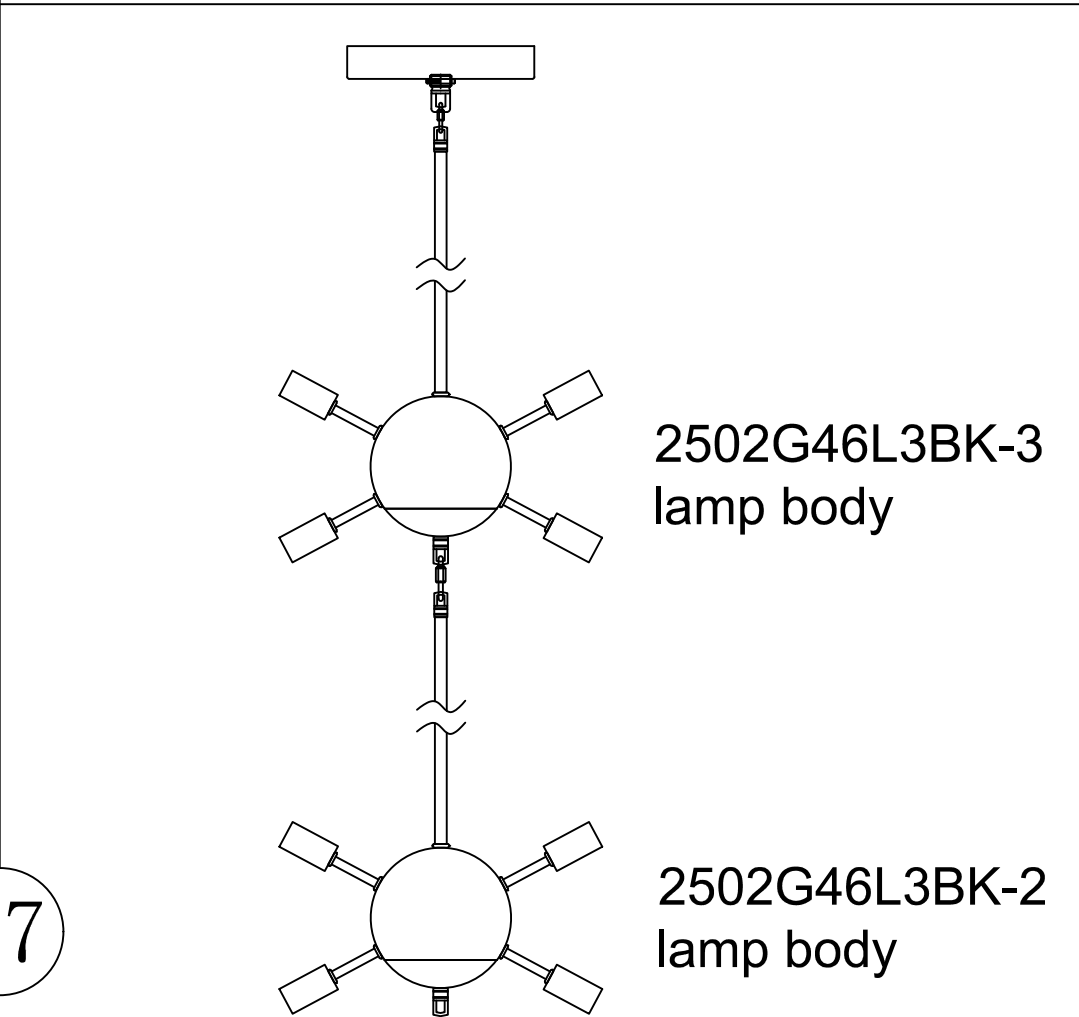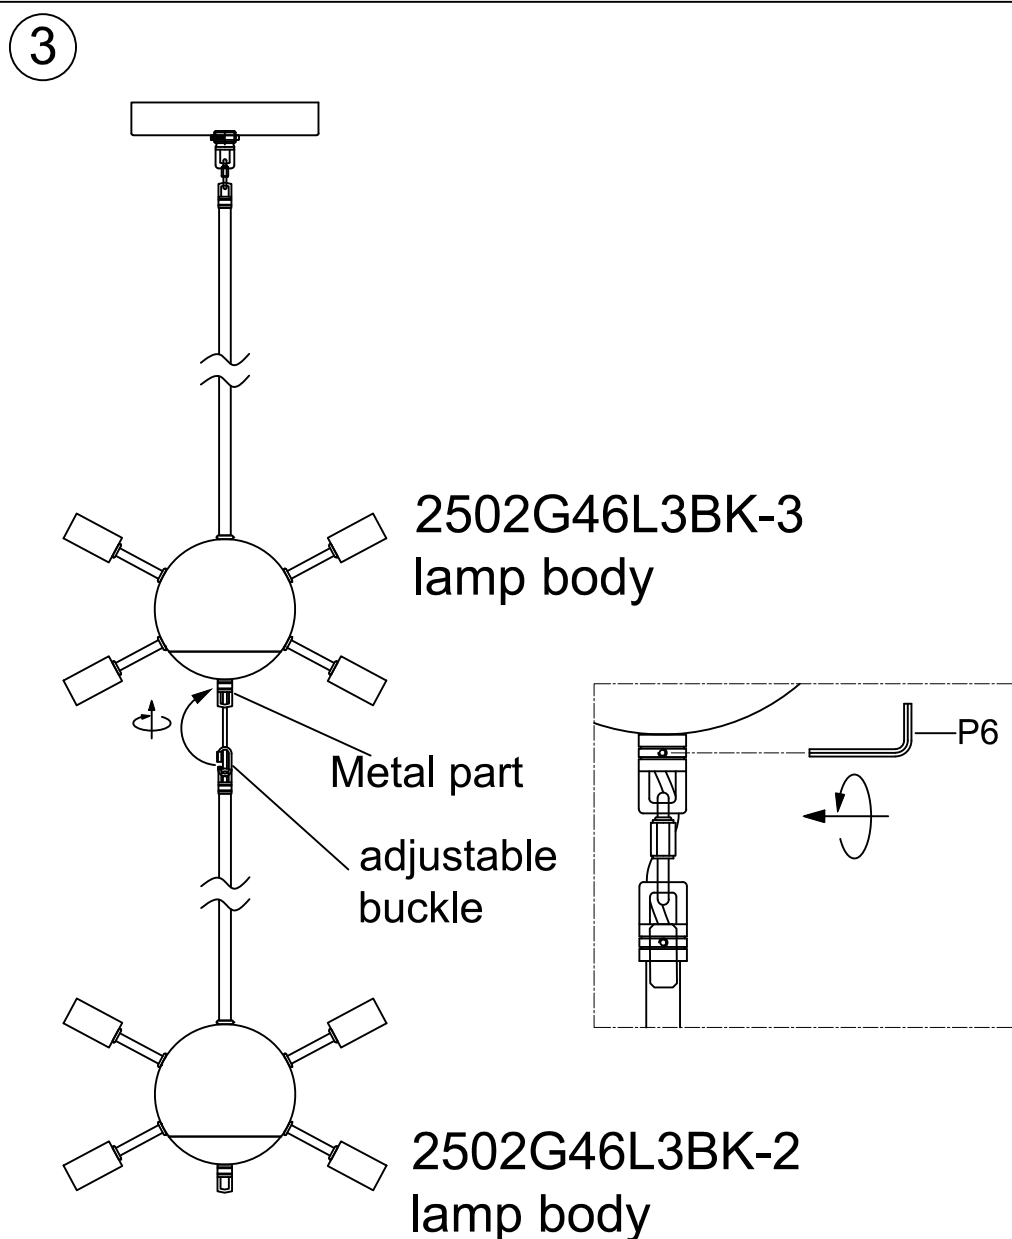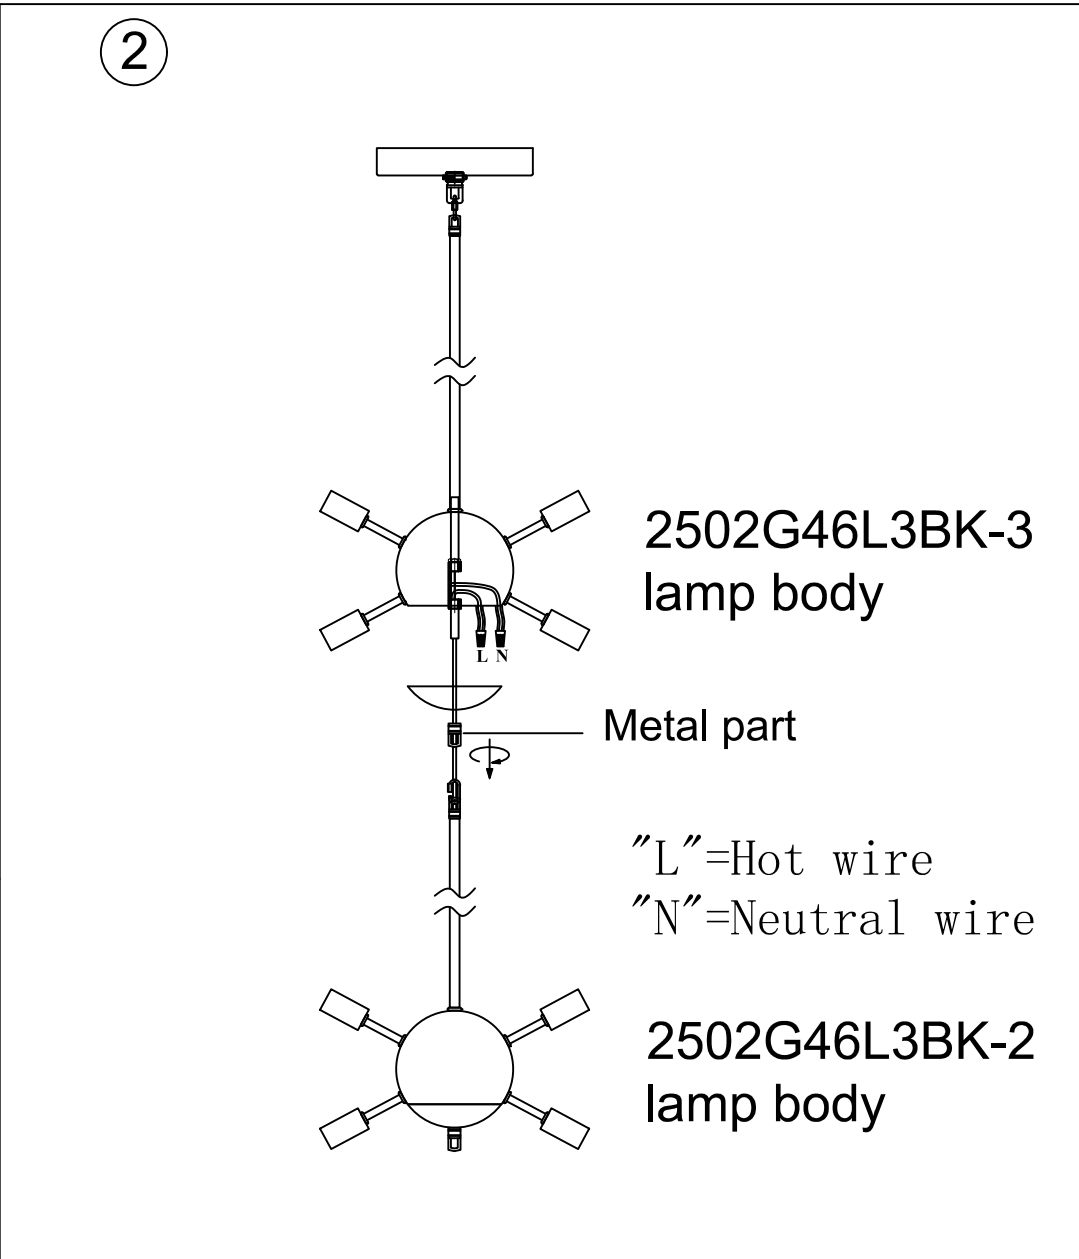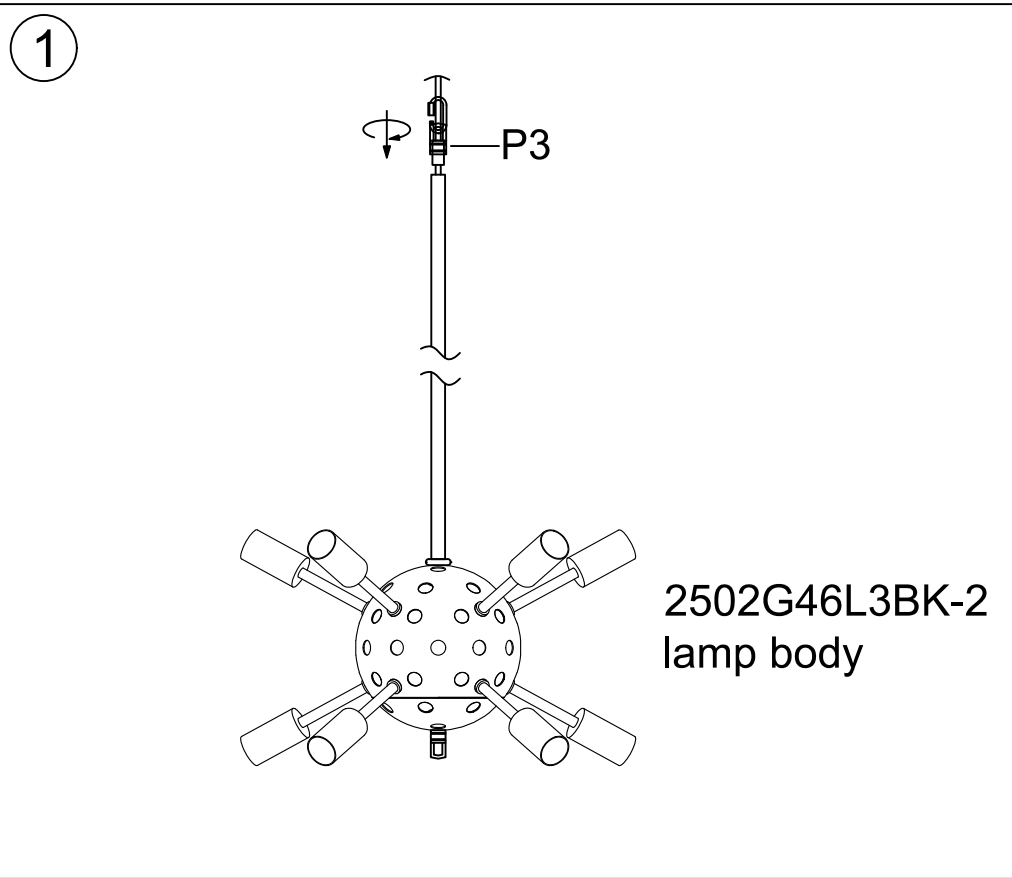


2502G46L3BK

Note:After you have assembled the 2502G46L3BK-3 and 2502G46L3BK-2 lamp body, you can proceed to the next assembly!!!


Step 5

- ① : Take the 2502G46L3BK-1 lamp body and twist (P3) into the rod.
- ② : Twist off the metal part of the 2502G46L3BK-2 lamp body to open the ball cover, and thread the 2502G46L3BK-1 wire into the 2502G46L3BK-2 lamp body, find the wiring cap in the lamp body and connect the two wires together.

①

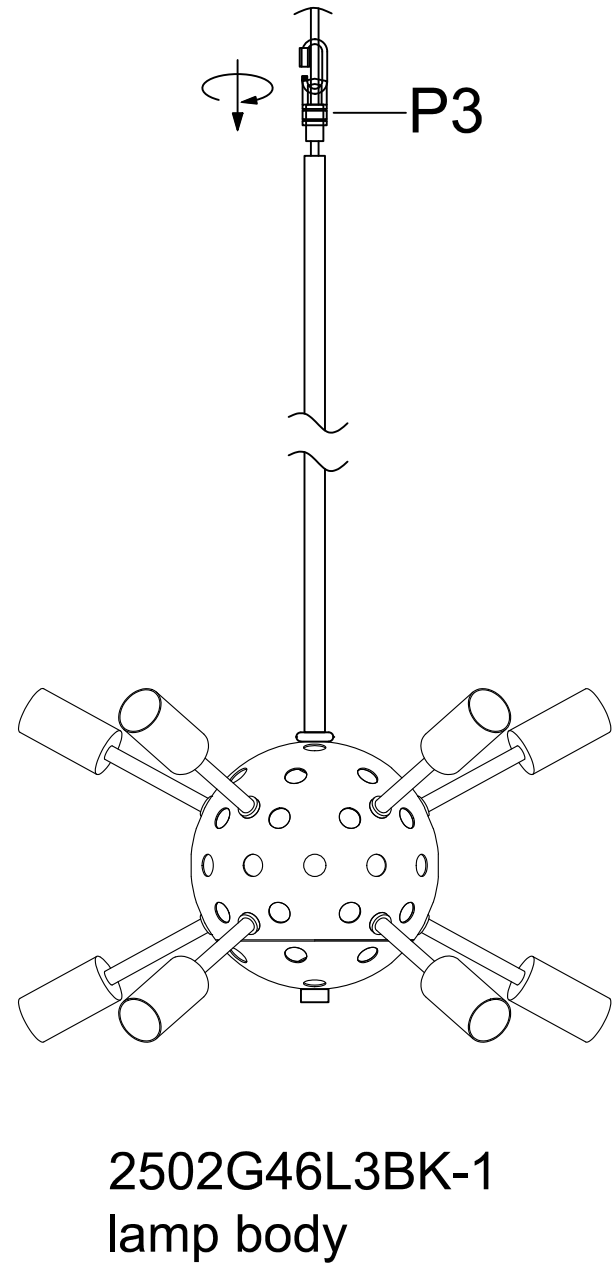

②

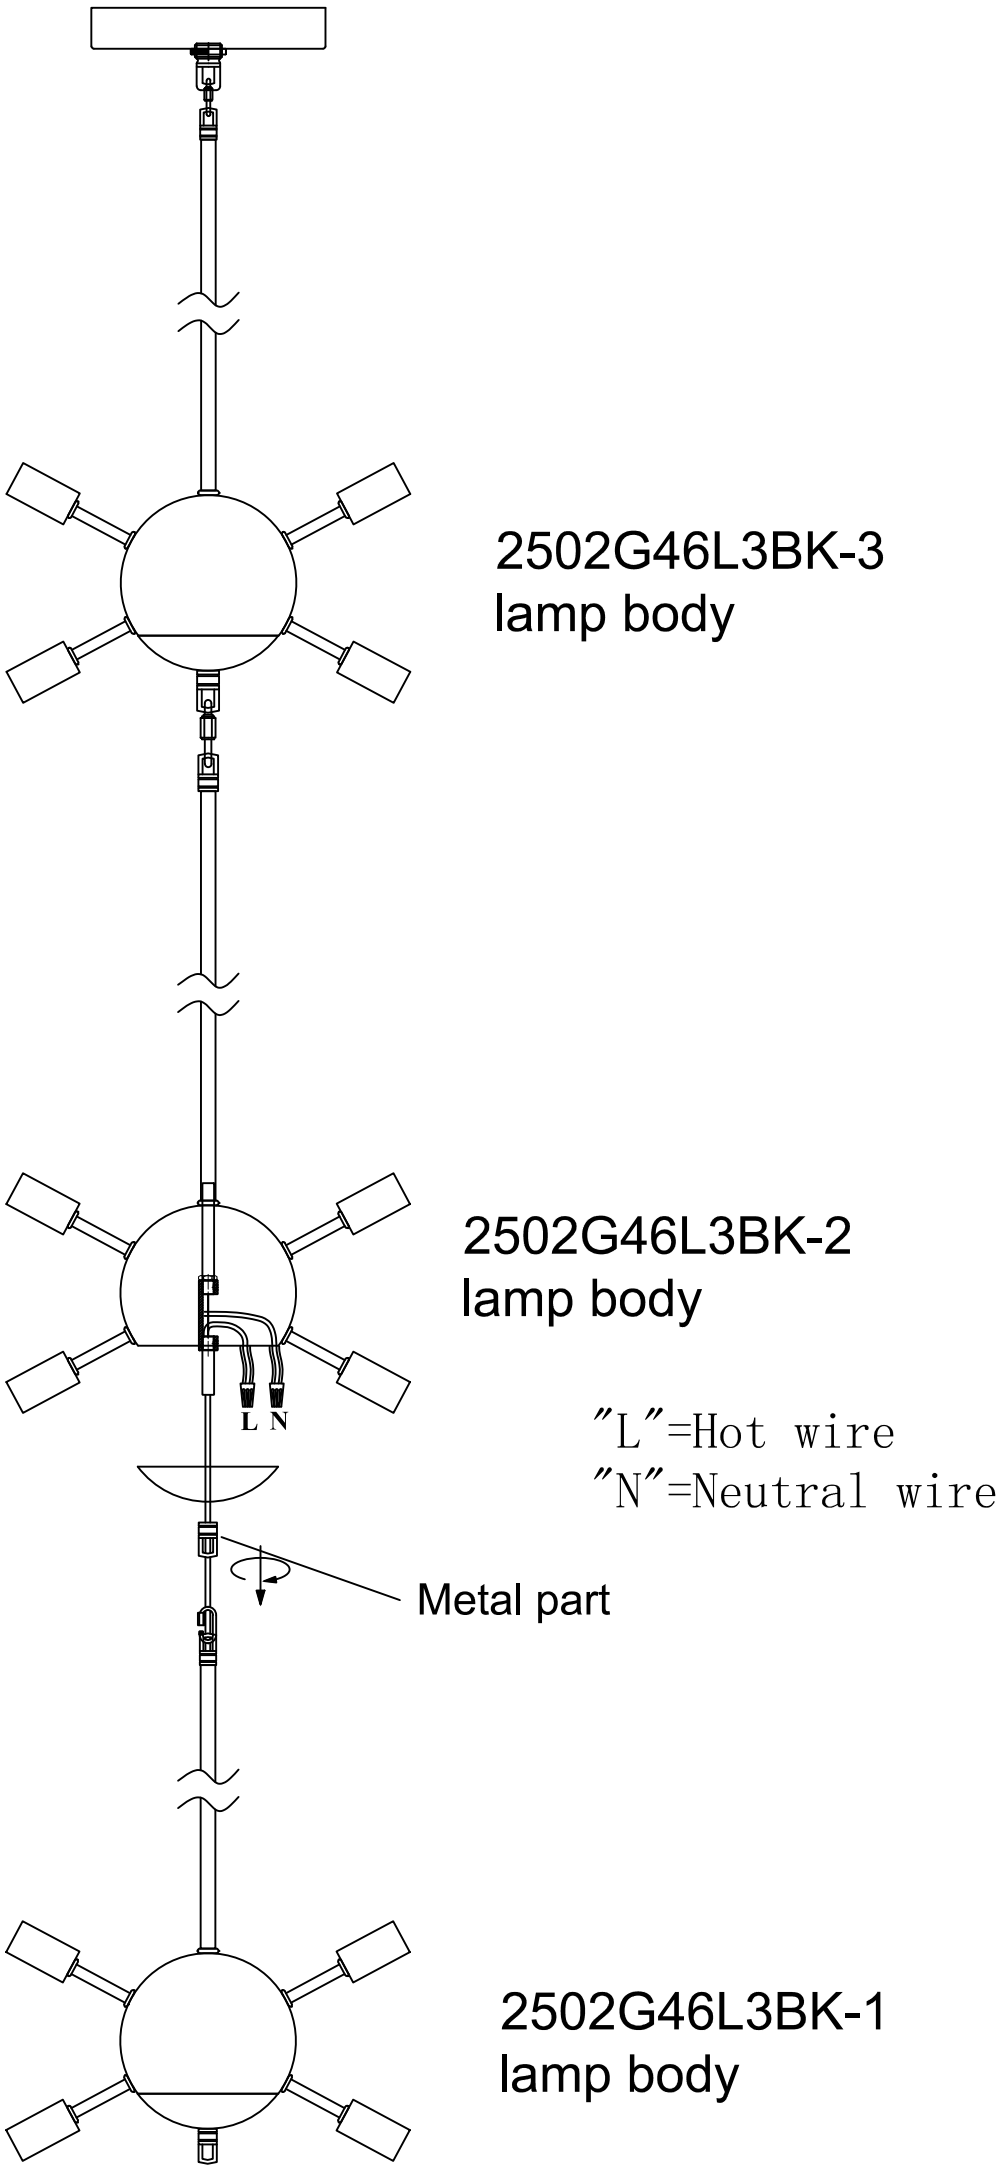



2502G46L3BK

Note:After you have assembled the 2502G46L3BK-3 and 2502G46L3BK-2 lamp body, you can proceed to the next assembly!!!

- ③ : Tighten the ball cover with the metal part, plug the excess wire into the 2502G46L3BK-2 lamp body, and then use the adjustable buckle to fasten the metal part, and finally use the (P6)M4 wrench to tighten the M4 screw in the corresponding hole on the metal part.

Congratulations you have completed the assembly of the lamp body.

3

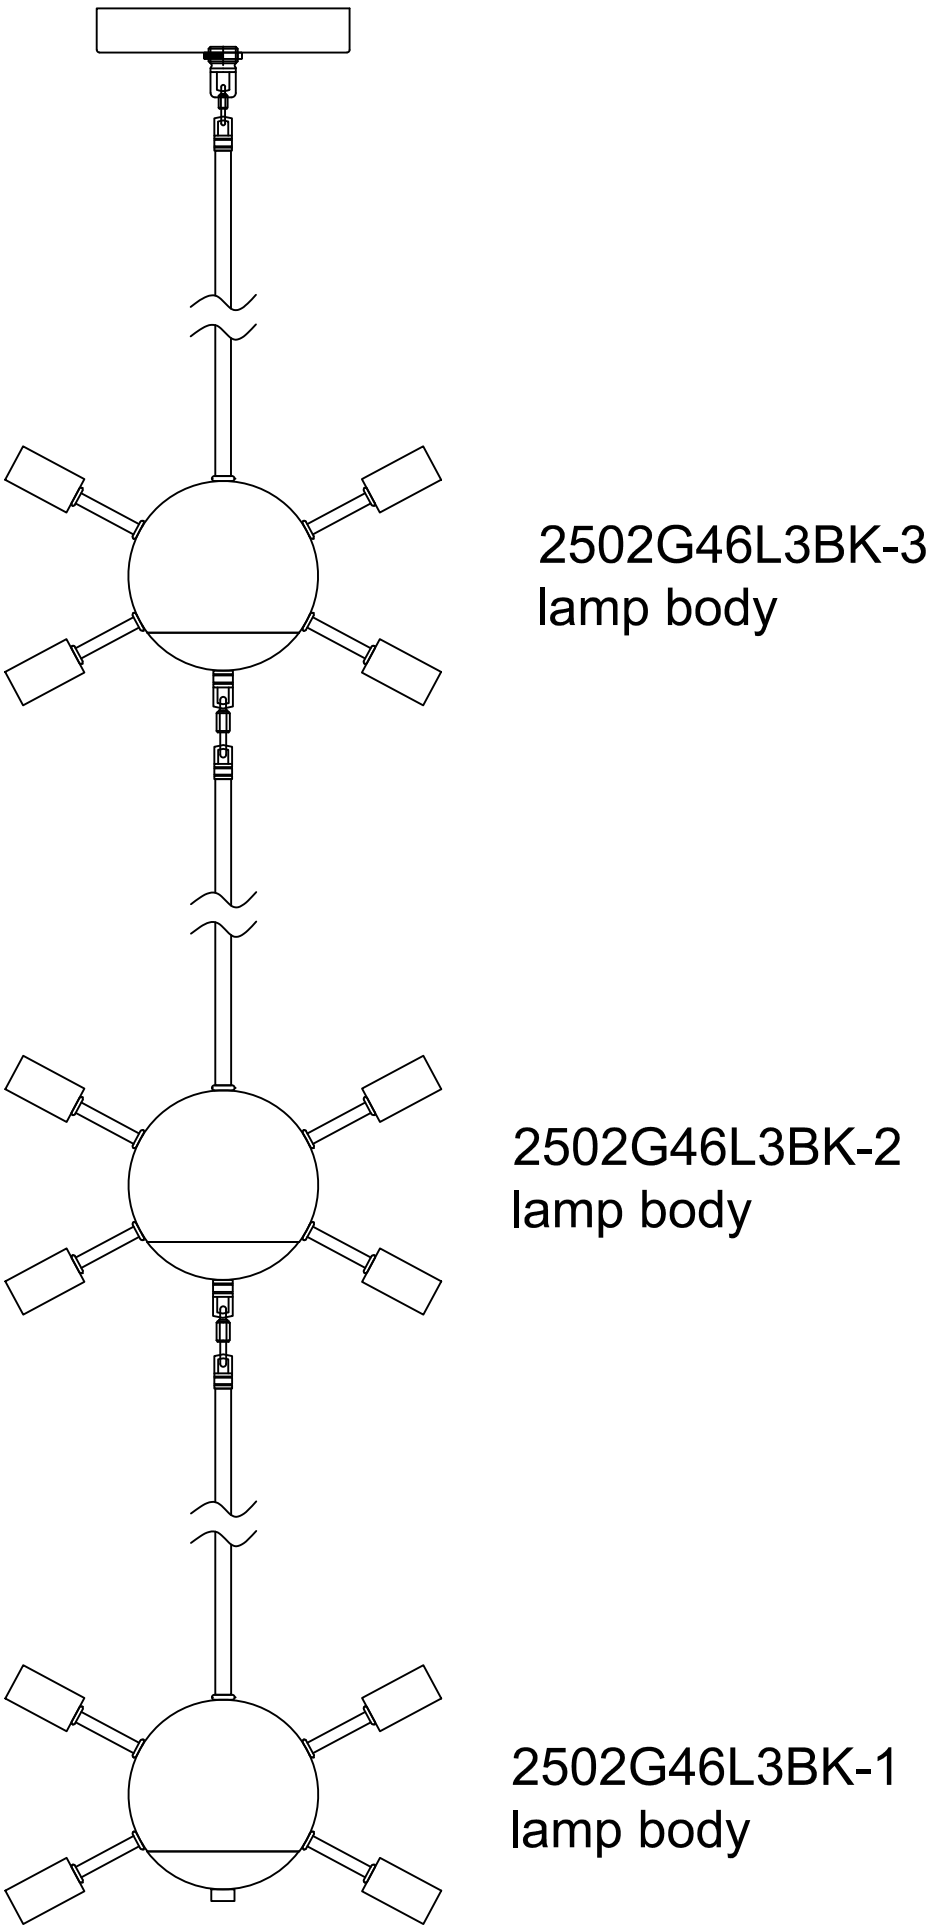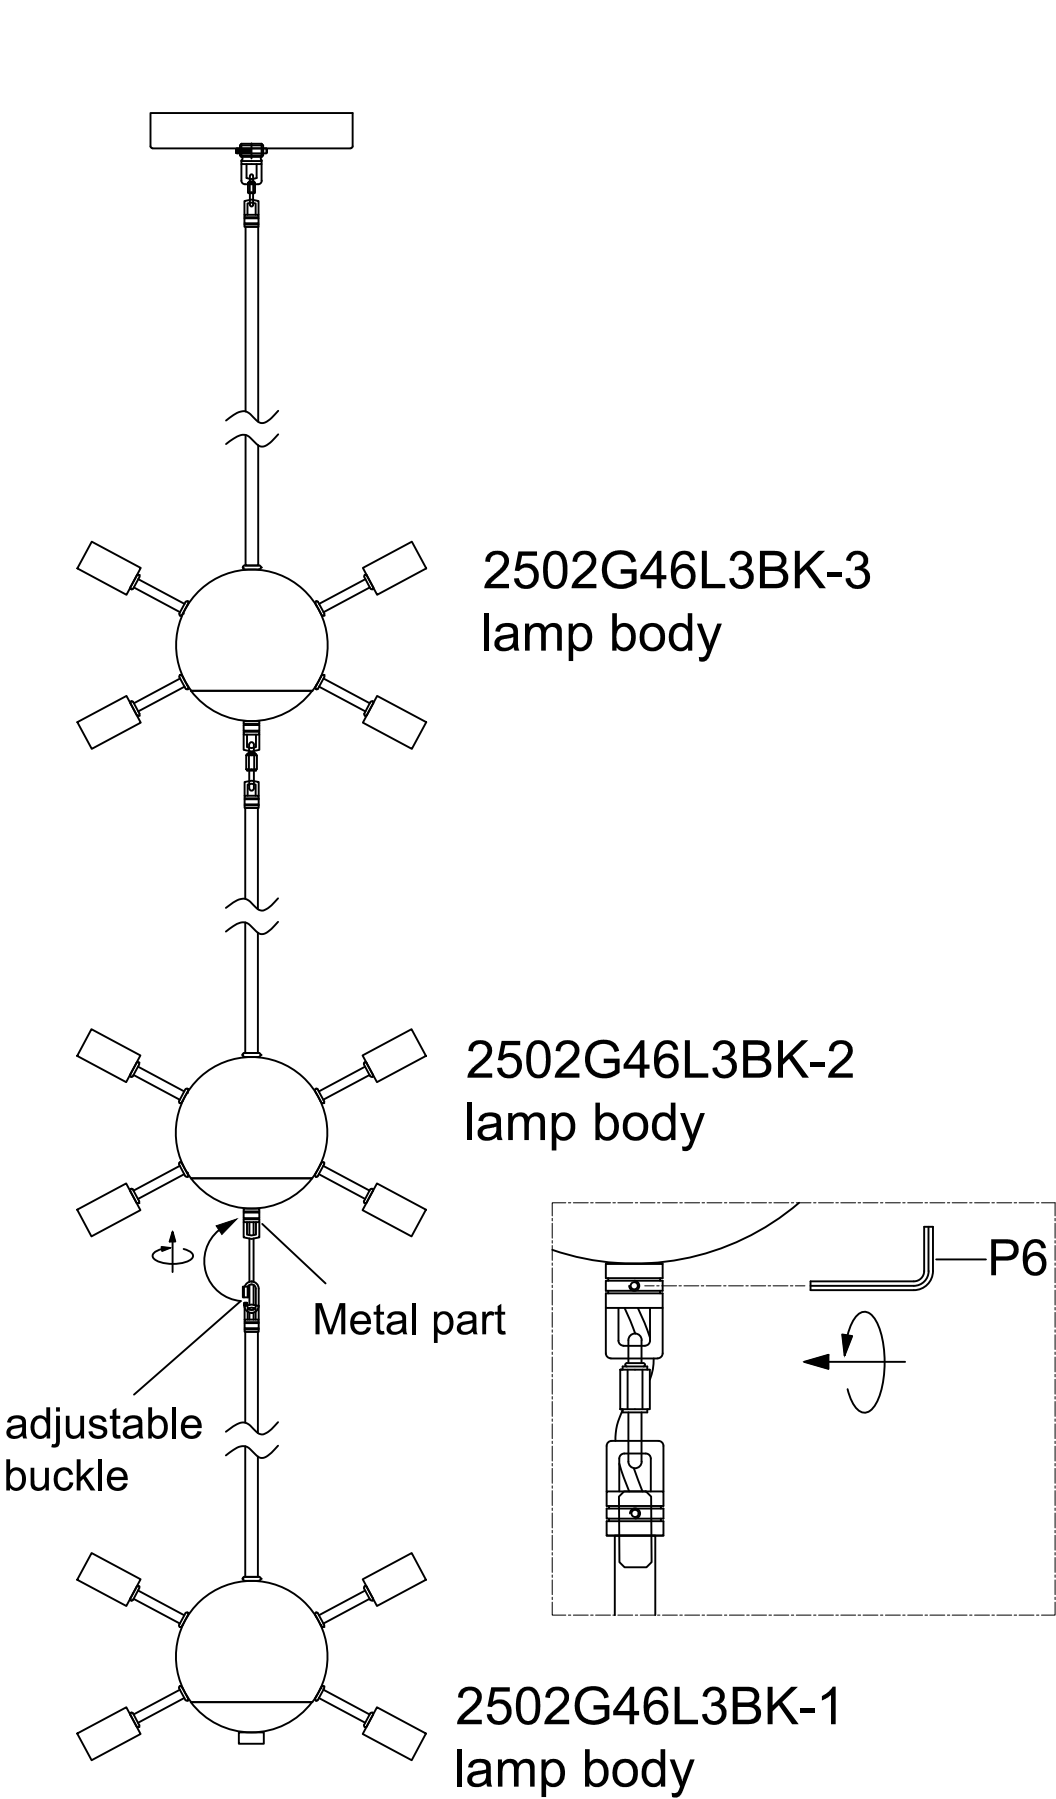

Schematic diagram of three-layer lamp body assembly

2502G46L3BK

Note:after you have assembled the three layers of the lamp body, you can proceed to the next assembly!



Step 6

Install the 2502G46L3BK-3 glass bar first.



When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

2502G46L3BK-3 Glass PARTS LIST

Parts Number	Part	Picture	Description	Qty
CR-2502D46BK-CL-A	A		Glass Bar A(Φ 0.5"*H7.7")	6
CR-2502D46BK-CL-B	B		Glass Bar B(Φ 0.5"*H10")	14
CR-2502D46BK-CL-C	C		Glass Bar C(Φ 0.5"*H15.7")	20
CR-2502D46BK-CL-D	D		Glass Bar D(Φ 0.5"*H20.4")	12

2502G46L3BK-3 Crystal Dressing Diagram


Schematic diagram of
layer installation

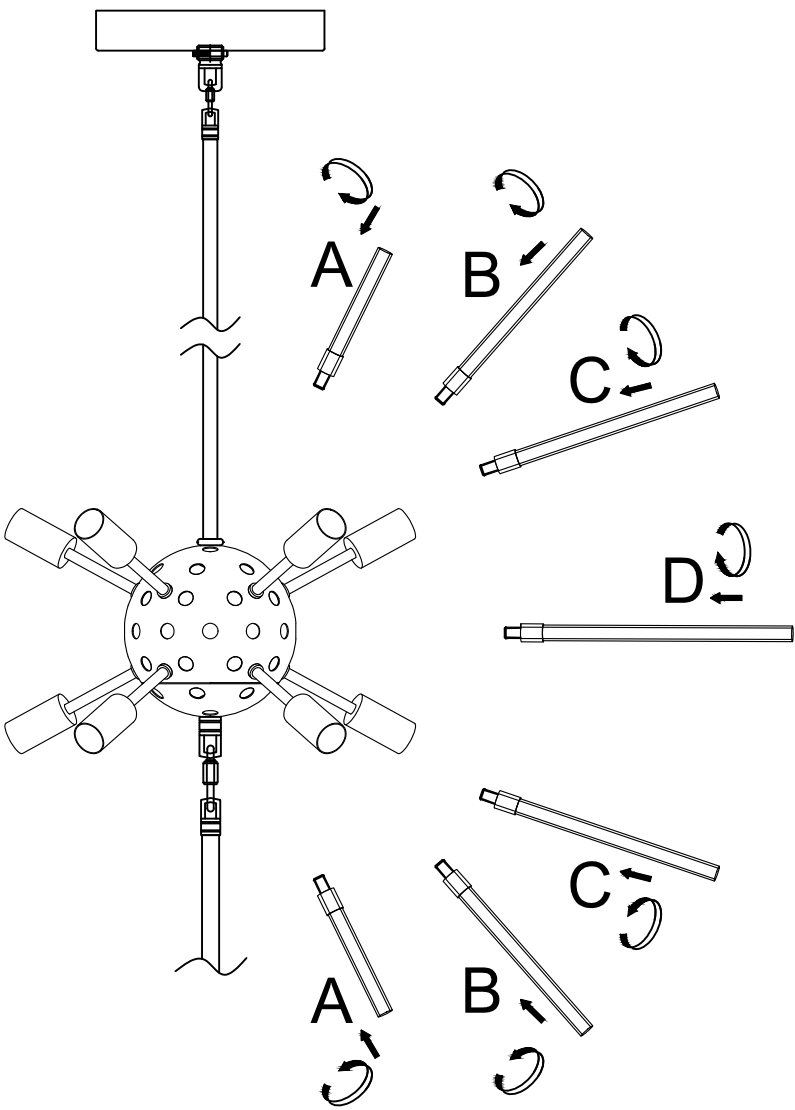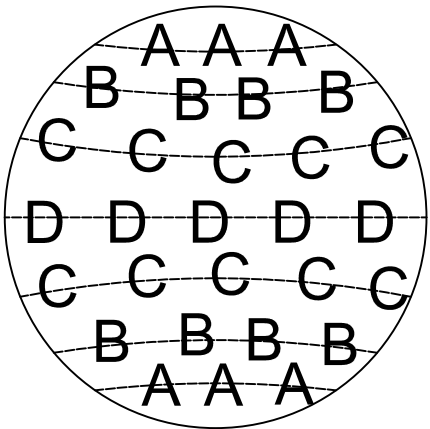

1. Twist the glass Bar A ,B,C,Dinto the corresponding hole

2502G46L3BK

Congratulations, you have completed the installation of 2502G46L3BK-3 lamp body and glass.

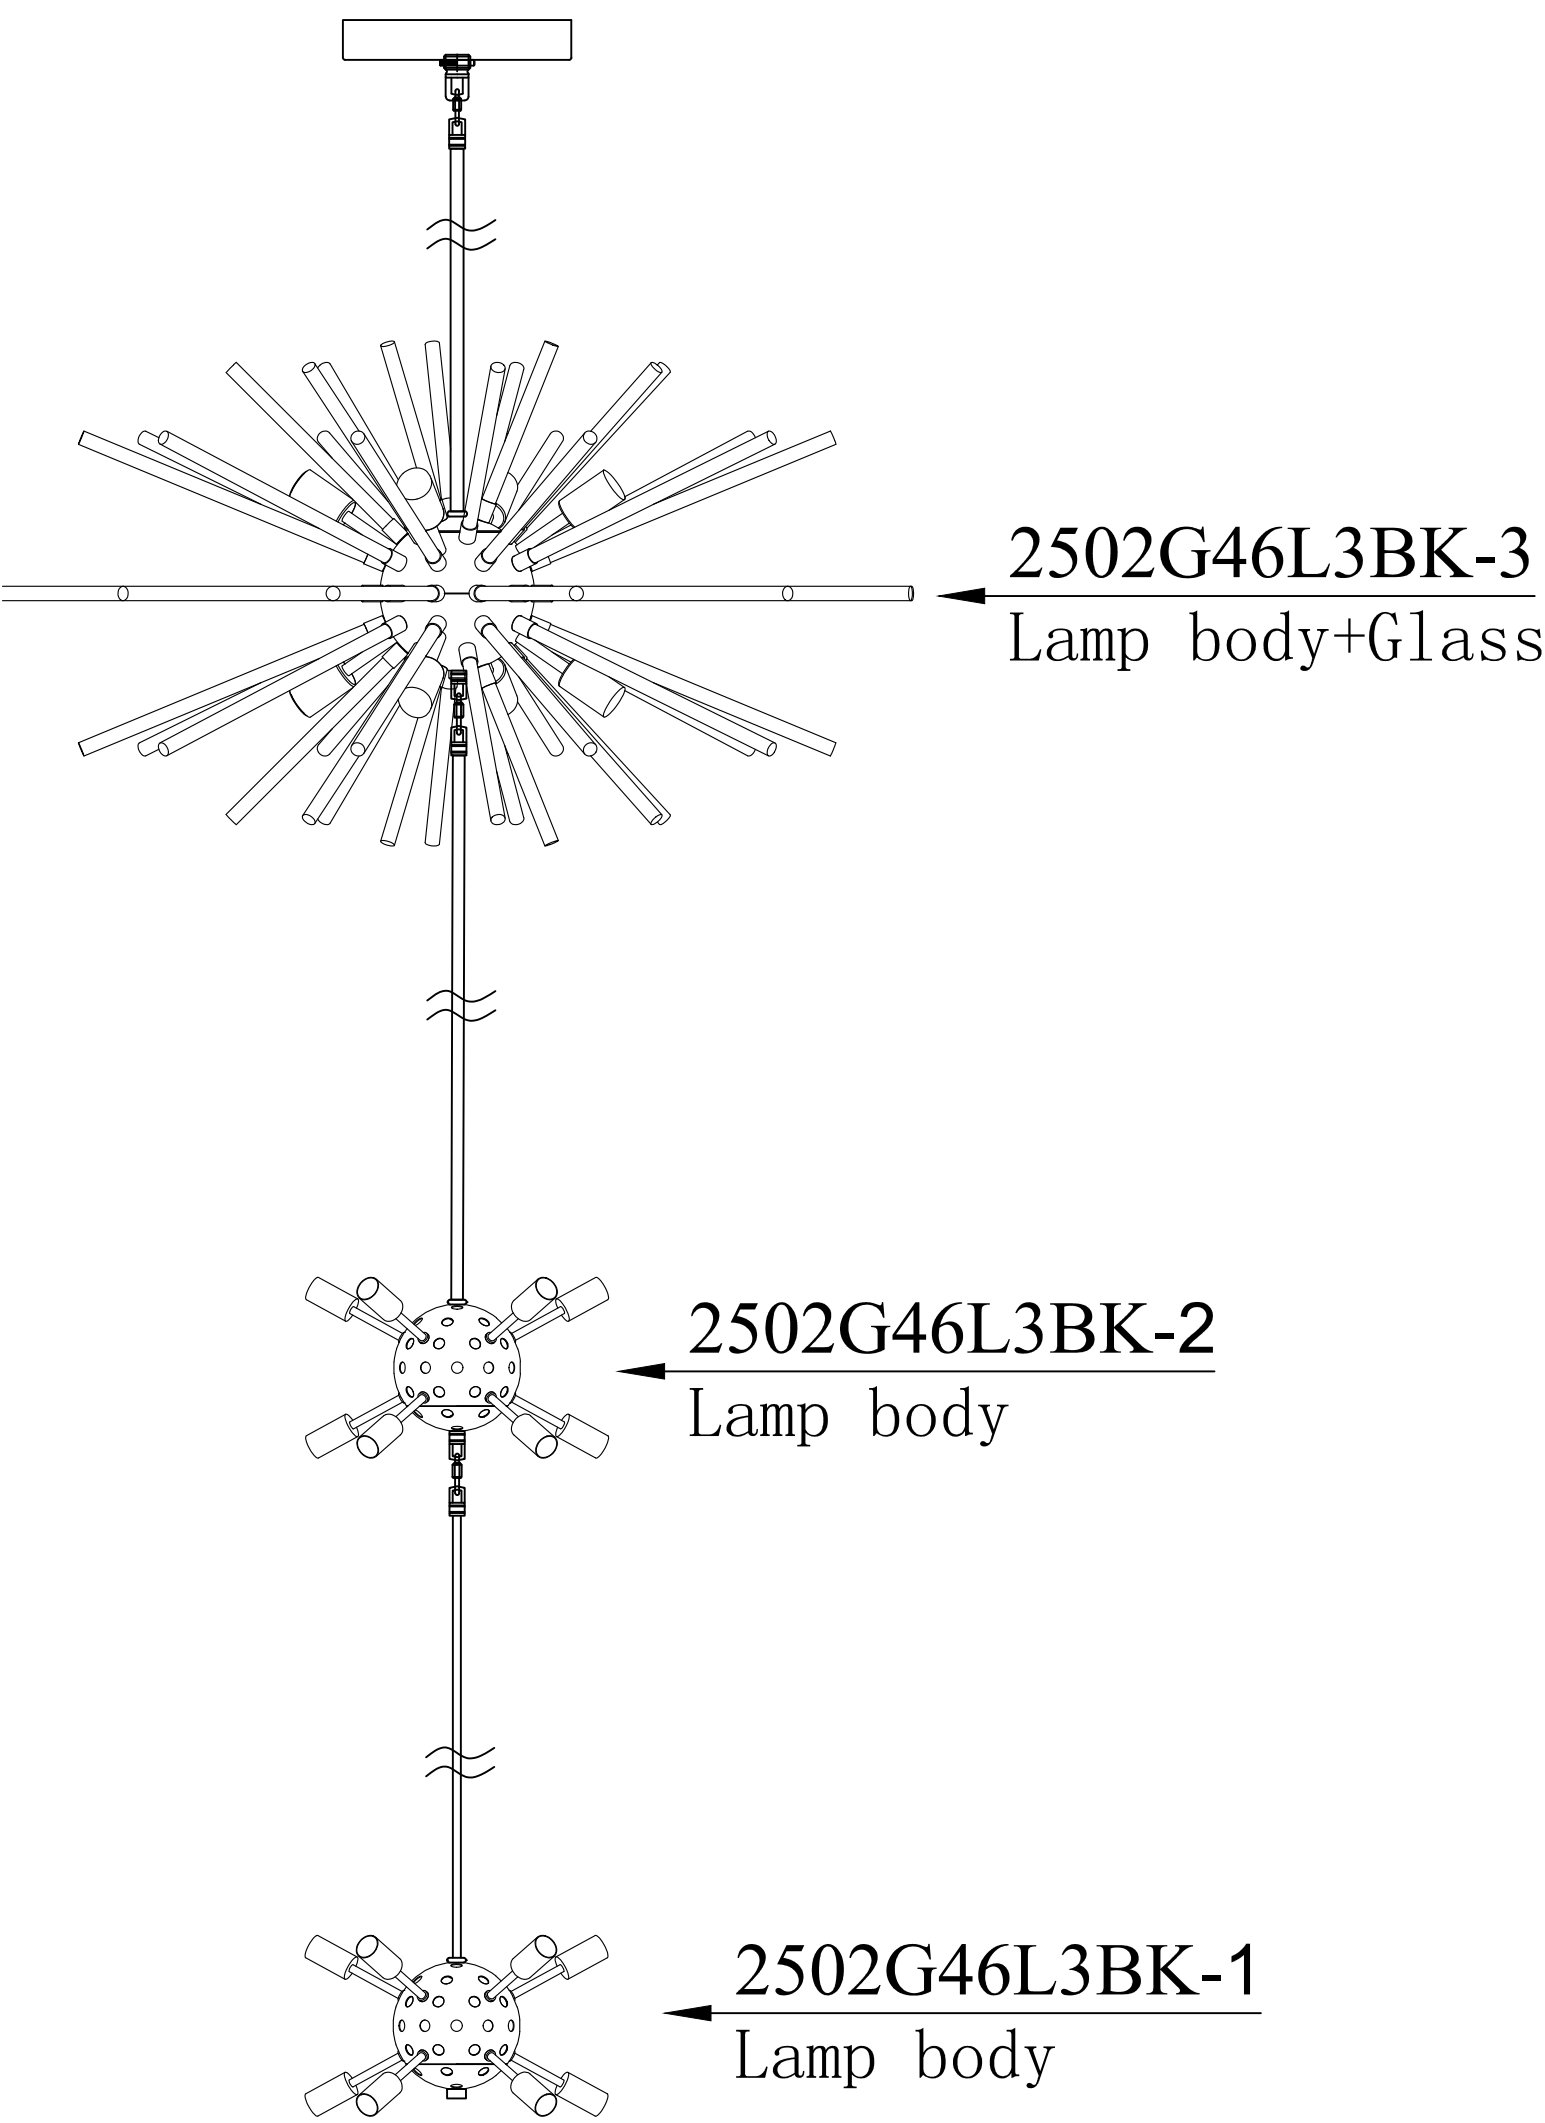

2502G46L3BK

Note:after you have assembled the 2502G46L3BK-3 of the lamp body and crystal , you can proceed to the next assembly!



Step 7

Install the 2502G46L3BK-2 glass bar.



When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

2502G46L3BK-2 Crystal PARTS LIST

Parts Number	Part	Picture	Description	Qty
CR-2502D42BK-CL-A	A		Glass Bar A(Φ 0.5"*H7.7")	6
CR-2502D42BK-CL-B	B		Glass Bar B(Φ 0.5"*H10")	14
CR-2502D42BK-CL-C	C		Glass Bar C(Φ 0.5"*H14.4")	20
CR-2502D42BK-CL-D	D		Glass Bar D(Φ 0.5"*H18.2")	12

2502G46L3BK-2 Crystal Dressing Diagram


Schematic diagram of
layer installation

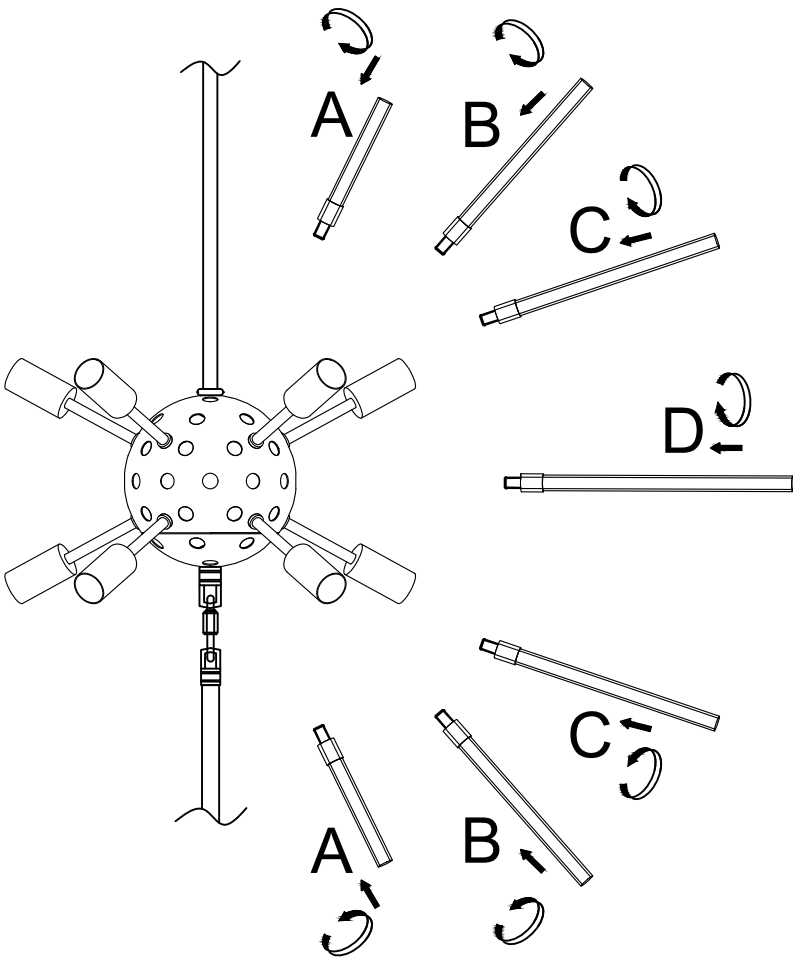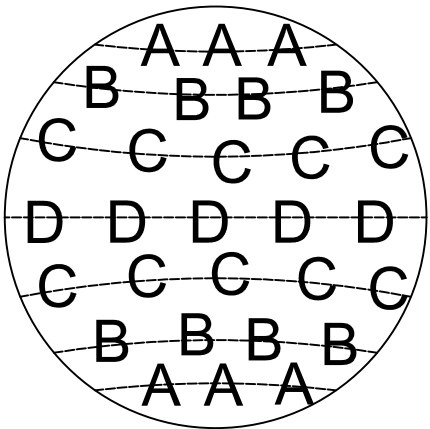

1. Twist the glass Bar A ,B,C,D into the corresponding hole

2502G46L3BK

Congratulations, you have completed the installation of 2502G46L3BK-2 lamp body and glass.

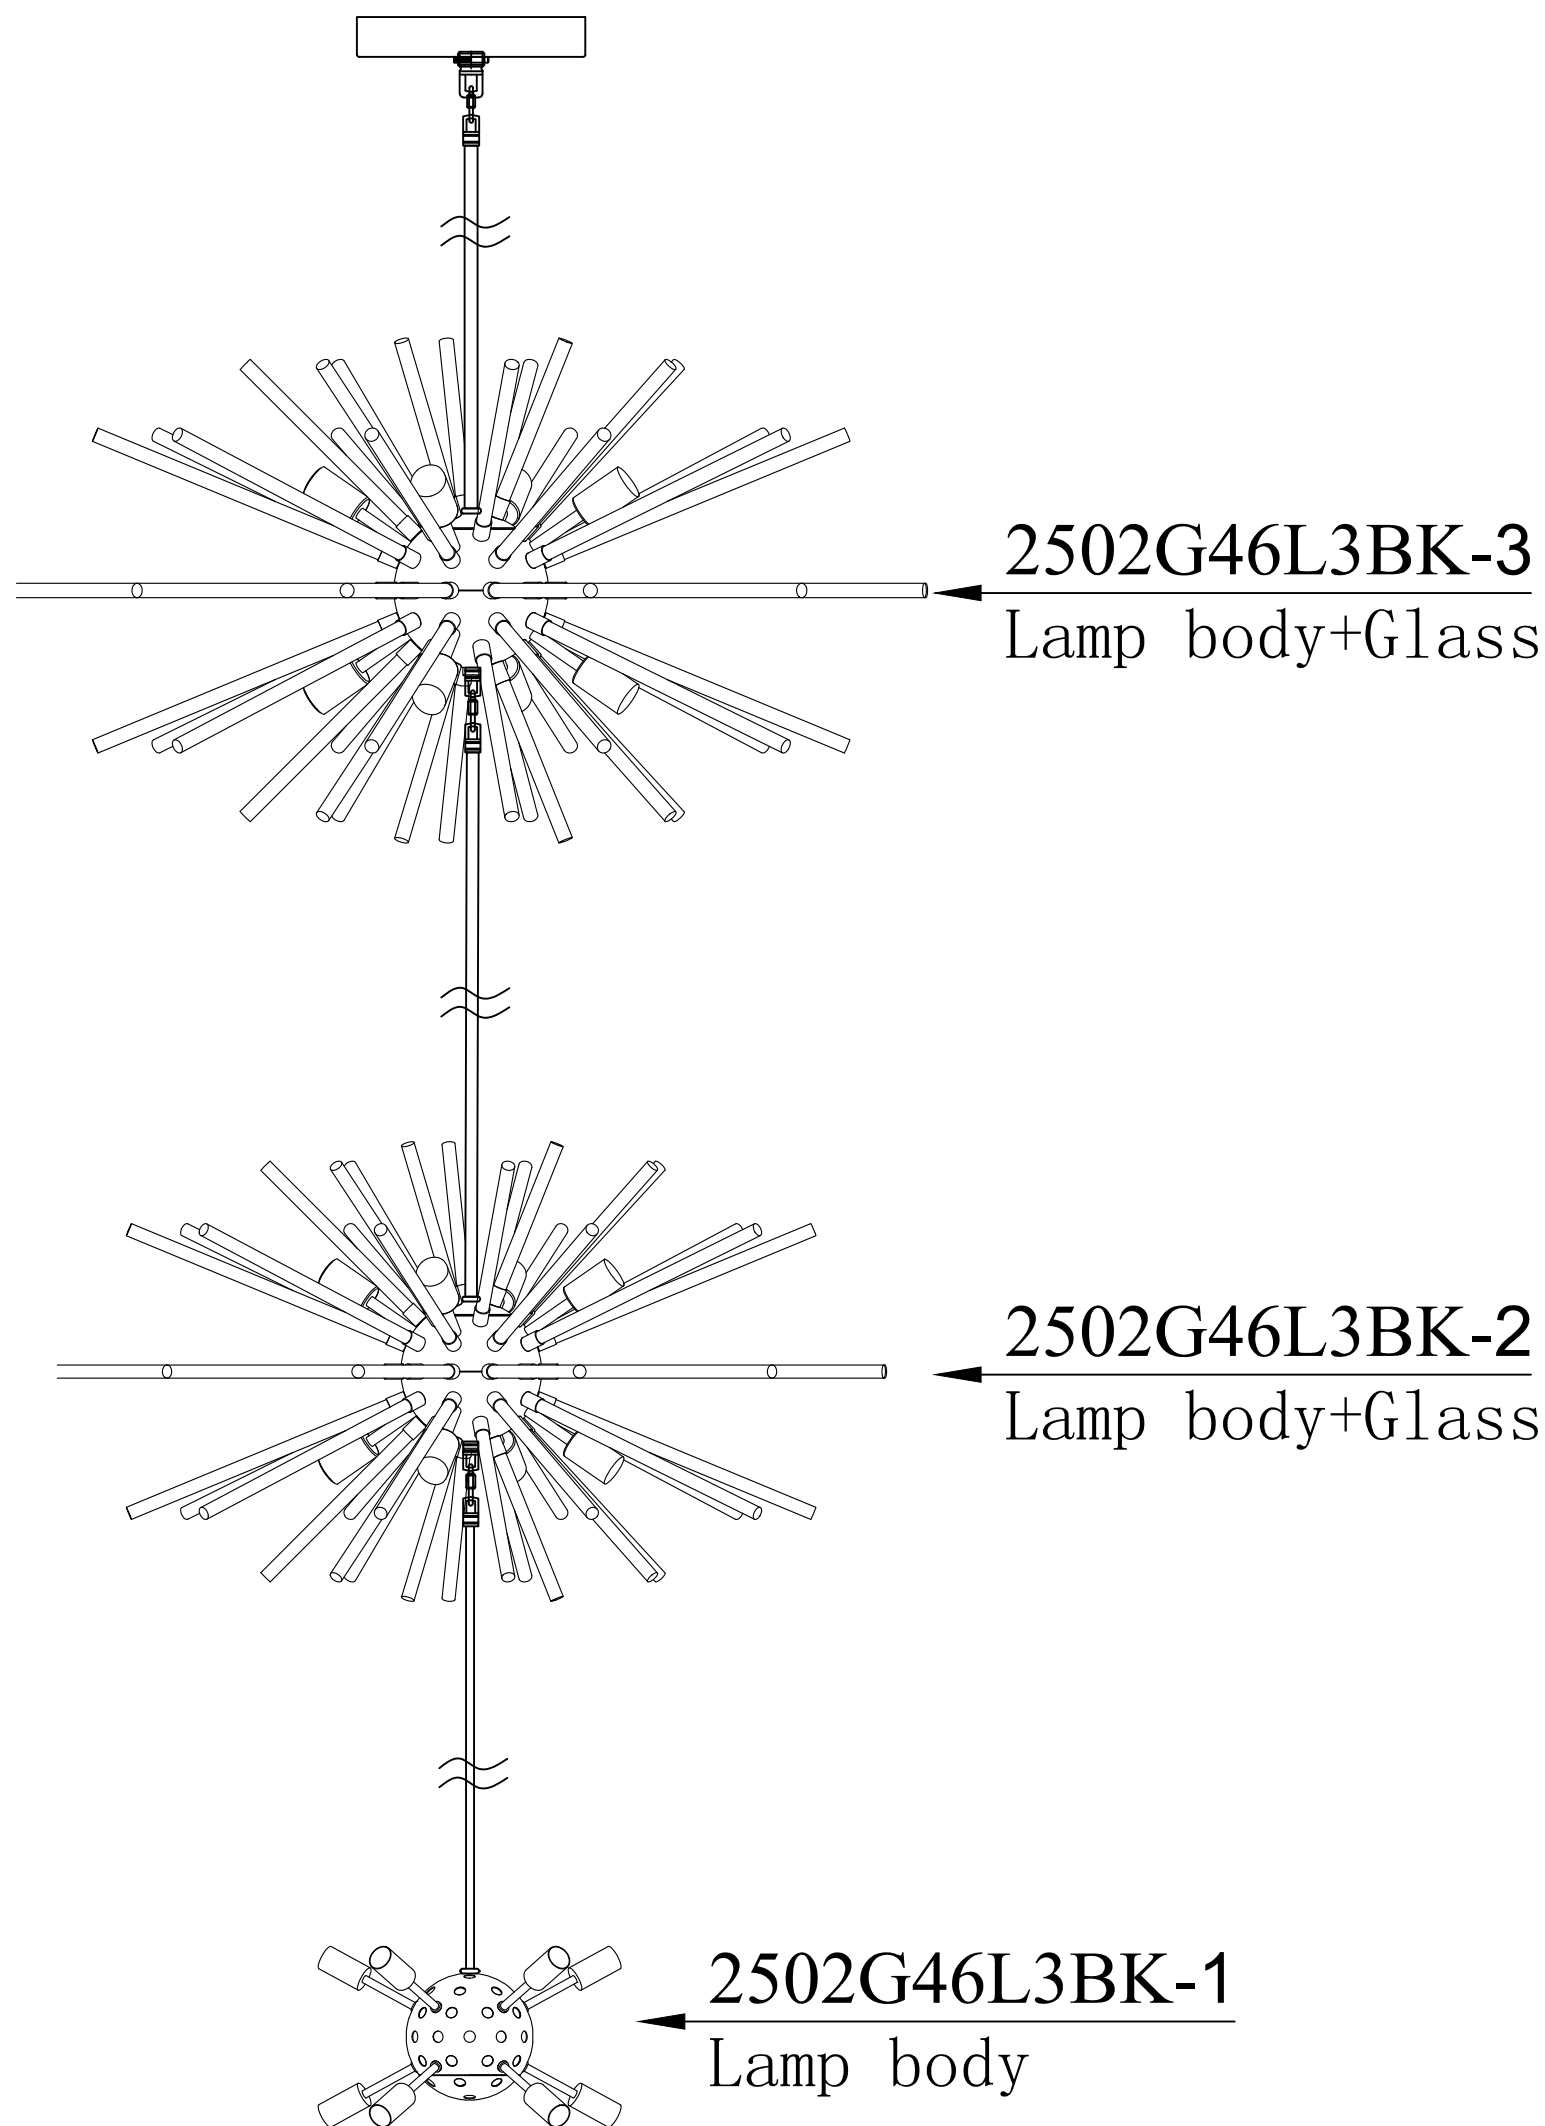

2502G46L3BK

Note:after you have assembled the 2502G46L3BK-2 of the lamp body and crystal , you can proceed to the next assembly!



Step 8

Install the 2502G46L3BK-2 glass bar.



When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

2502G46L3BK-1 Crystal PARTS LIST

Parts Number	Part	Picture	Description	Qty
CR-2502D36BK-CL-A	A		Glass Bar A(Φ 0.5"*H7.7")	6
CR-2502D36BK-CL-B	B		Glass Bar B(Φ 0.5"*H9.6")	14
CR-2502D36BK-CL-C	C		Glass Bar C(Φ 0.5"*H13")	20
CR-2502D36BK-CL-D	D		Glass Bar D(Φ 0.5"*H15.3")	12

2502G46L3BK-1 Crystal Dressing Diagram


Schematic diagram of layer installation

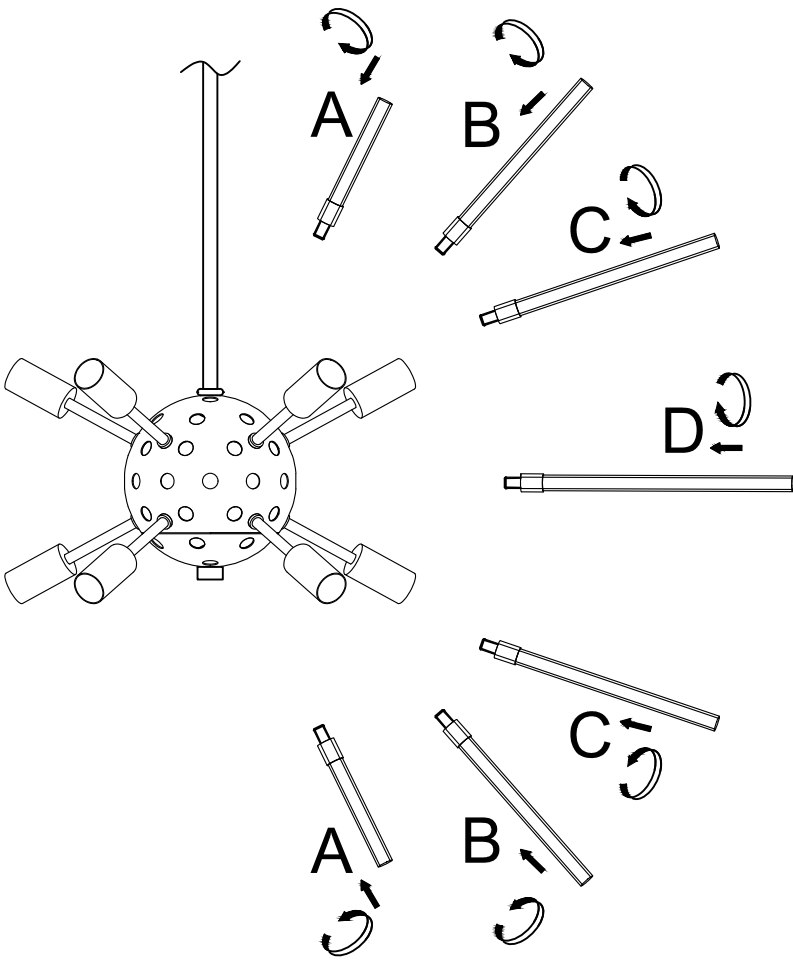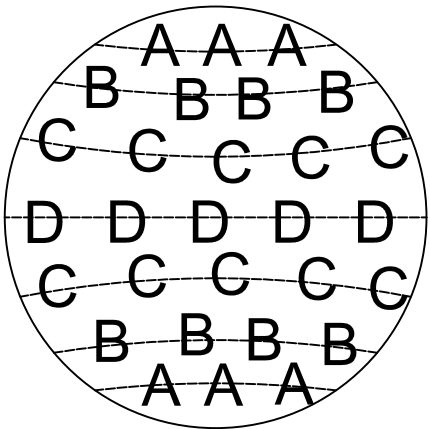

1. Twist the glass Bar A ,B,C,Dinto the corresponding hole

2502G46L3BK

Congratulations, you have completed the installation of the three layers of lamp body and Glass.

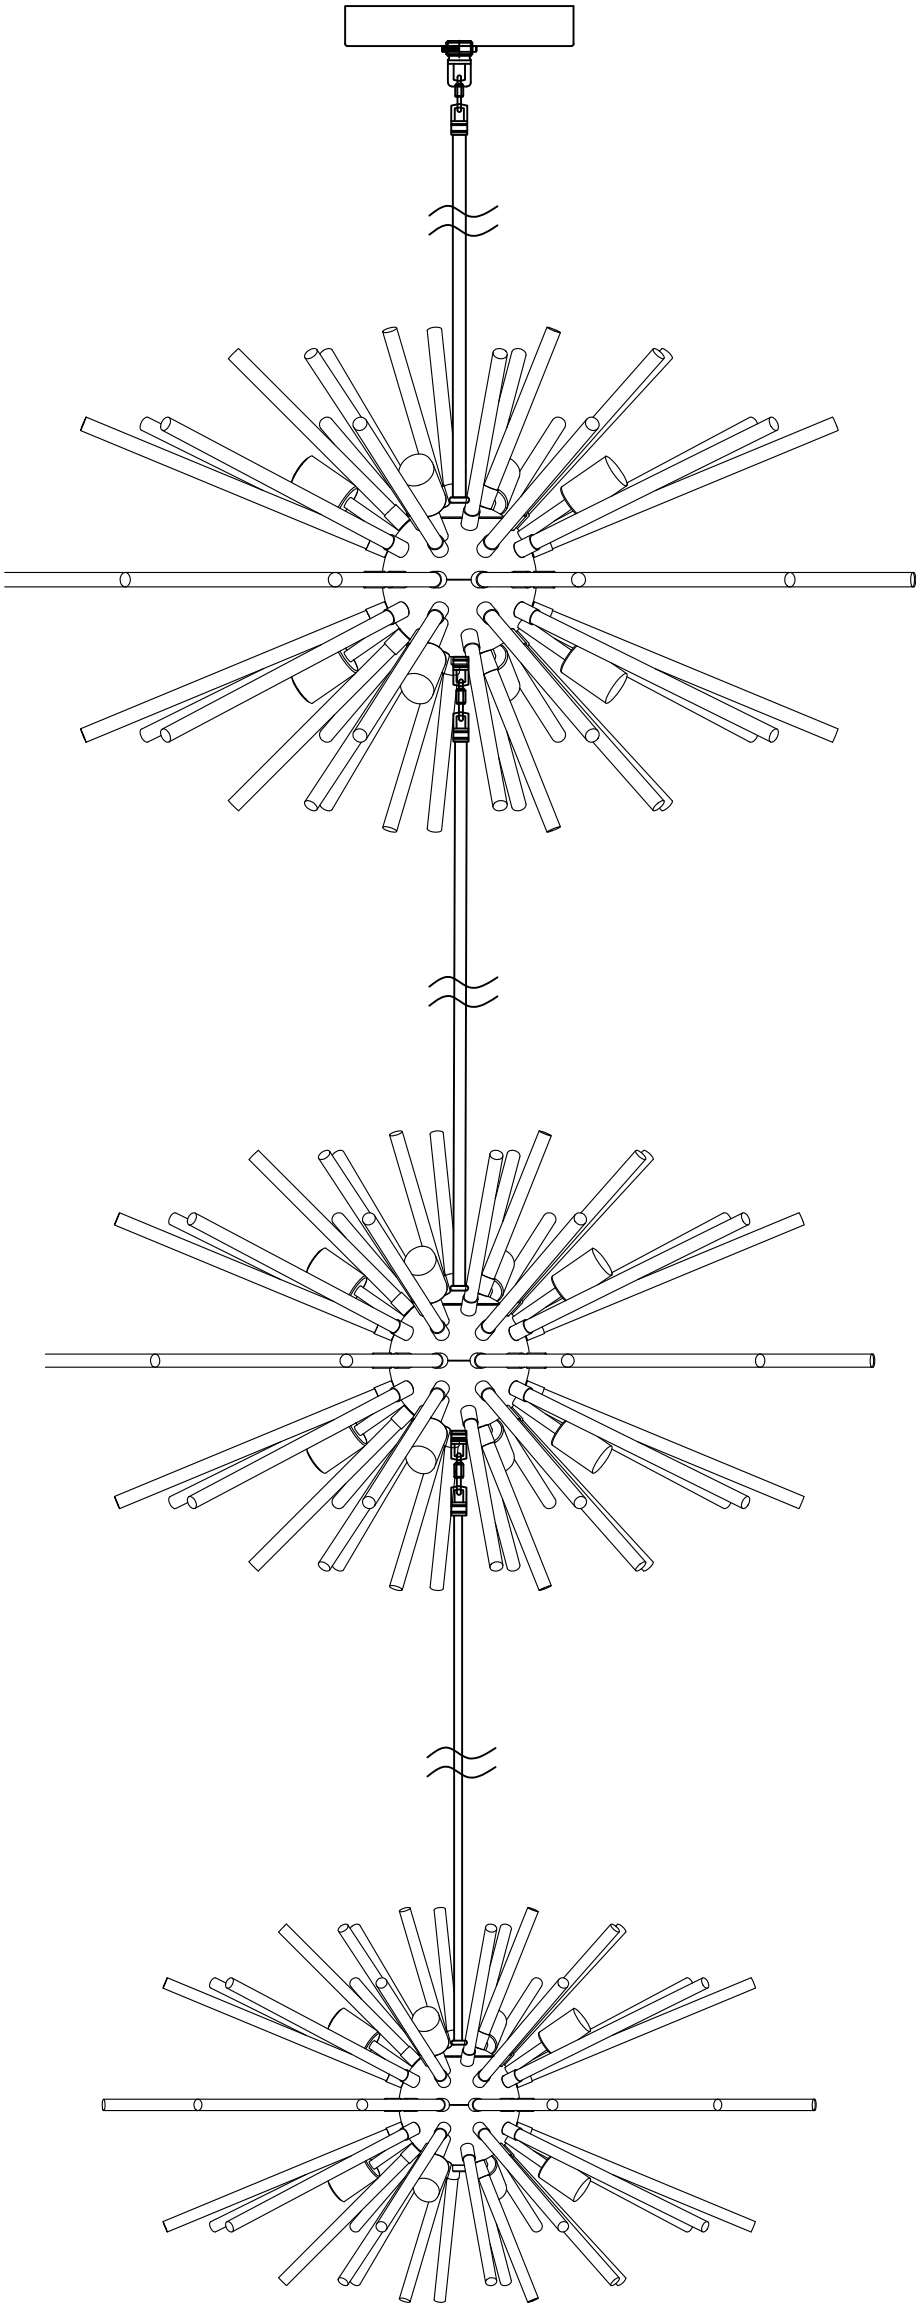

Congratulations !

You are now done installing your
Elegant Lighting fixture. Sit back
and admire each crystal as it will
become the statement piece for
your room/house.

Thank you.

Cleaning and Maintenance of Chandelier Frame

The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean soft, dry cloth. Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish. Failure to follow these instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals

Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

To Order Crystal Replacement Parts

Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us . For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle . You will be contacted with prices prior to shipment. All orders must be pre-paid.

Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of one (1) year from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department.

A written return authorization form will be sent to you with specific instructions.

Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department .Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warranty, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.