

# ASSEMBLY INSTRUCTIONS

## ITEM NO: FX-3745-38

\*\*\* THIS IS A DIRECT WIRED FIXTURE. WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.


\*\*\* TO REDUCE THE RISK OF ELECTRIC SHOCK, SHUT OFF THE MAIN ELECTRICAL SUPPLY AT FUSE BOX/CIRCUIT BREAKER.

\*\*\* THIS FIXTURE SHOULD ONLY BE CLEANED WITH A SOFT LINT FREE CLOTH DAMPLED WITH WATER. DO NOT USE ANY CHEMICAL OR ABUSIVE CLEANER AS THEY MAY DAMAGE THE SURFACE OF THE PRODUCTS.

\*\*\* THIS LED FIXTURE IS NOT DIMMABLE.

CAREFULLY UNPACK AND PLACE ALL PARTS ON A SMOOTH SURFACE.

1. CONNECT THE GREEN GROUND WIRE "T" TO THE SUPPLY WIRE, CATHODE WIRE "N" IN WHITE TO THE SUPPLY WIRE, ANODE WIRE "L" IN BLACK TO THE SUPPLY WIRE IN THE JUNCTION BOX AS ILLUSTRATED WITH WIRE NUTS (1).
2. ATTACH THE MOUNTING PLATE (2) TO JUNCTION BOX AND TIGHTEN BY SCREWS (3).
3. LOOP THE CABLE INSIDE THE CANOPY USING THE PLASTIC STRAIN RELIEF TO HAVE YOUR DESIRED LENGTH, TUCK ADDITIONAL WIRE INSIDE THE CANOPY (4).
5. ALIGN THE CANOPY TO THE MOUNTING PLATE AND TIGHTEN BY SIDE SCREW (5).

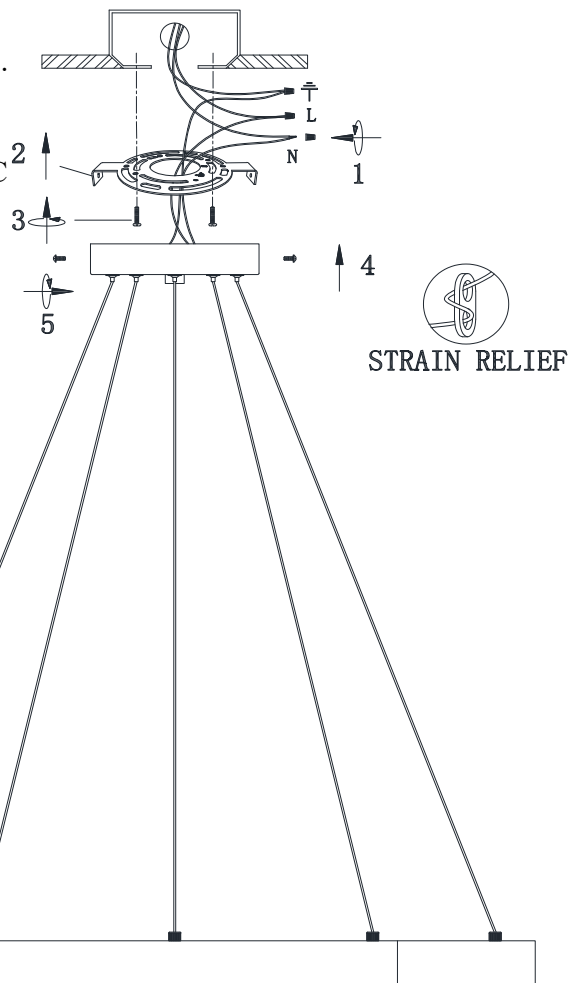

*This LED light provides low maintenance service with no bulbs to change.*

TURN ON POWER AND ENJOY YOUR LIGHT!!!

**USE 38W LED BULB  
(bulb included)**

**SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.**