

# Installation manual for:

2800G44C, 2800G44G

2800G44GT

RC/EC/SA/SS

Dimensions:D44" H44" L36+1

Collection:Maria Theresa

Bulb Type:E12 bulb not included

Lamp Frame Weight(lbs):31.8

Total Weight(lbs):124



Thank you for choosing our product(s).


Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation.

If you have any questions, our professional customer service team is committed to assisting you, please call our toll free HOTLINE AT:



# 1-888-388-3390



## SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.


## CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit: 110 - 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

## Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions please call our Customer Service department at 1-888-388-3390. Please have model number (at the front page) where you purchase from and any other relevant information ready. Our customer service team will provide comprehensive and worry free service to our valued customers.

## Frame Parts List

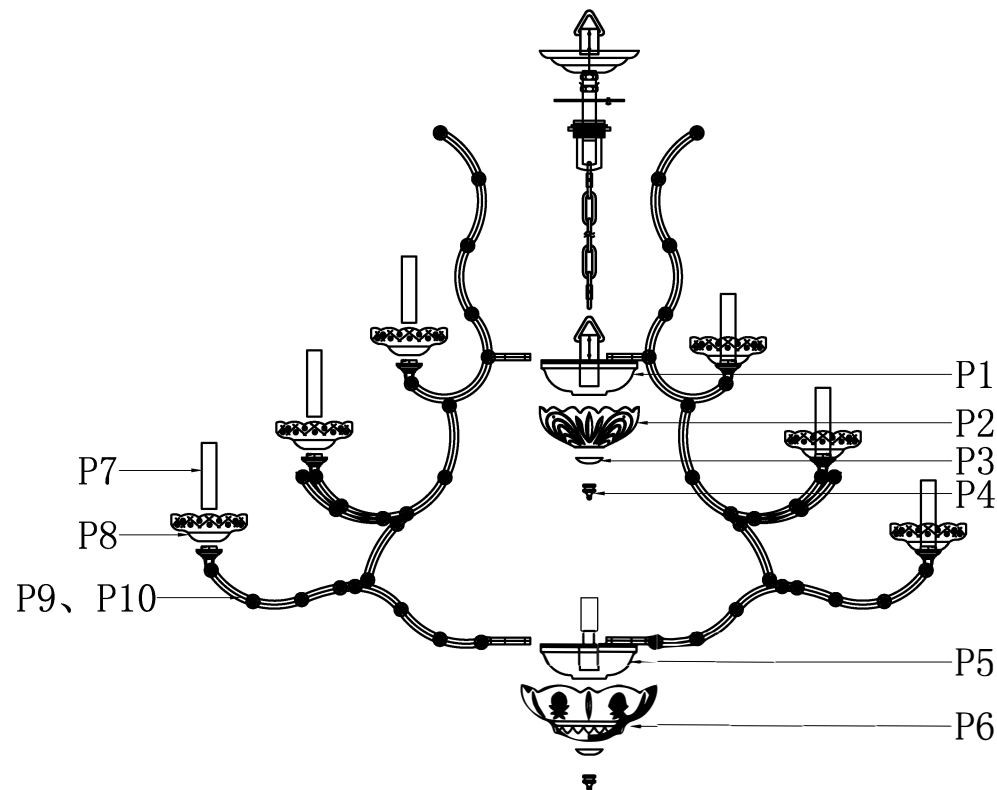














2800G44 D44" H44" L36+1

## Step 1















Please use the parts list to ensure you are not missing any parts

2800G44










### PARTS LIST

part	picture	Description	Qty	Check list
ZA		4"Crossbar	1	
ZB		Ø6"Canopy cover	1	
ZC		Canopy ring	1	
ZD		Chain 59"	1	
P1		top tier lamp body	1	
P2		top tier bobèche 5.9"	1	
P3		washer	2	
P4		finial	2	
P5		bottom tier lamp body	1	
P6		bottom tier bobèche 7.1"	1	
P7		4"Candle cover	36	
P8		bobèche 4.5"	36	
P9		lamp arm	4	

2800G44 D44" H44" L36+1

part	picture	Description	Qty	Check list
P10		lamp arm	4	
A		1050-14#*2+911-2.5"	8	
B		1050-14#*1+911-2.0"	180	
C		1050-14#*1+911-2.5"	8	
D		1050-14#*1+911-2.5"	12	
E		1050-14#*3+911-2.5"	8	
F		1050-14#*2+911-3.0"	16	
G		1050-14#*1+911-3.0"	16	
H		1050-14#*4+911-3.0"	16	
I		1050-14#*7+911-3.0"	8	
J		1050-14#*8+911-3.0"	8	
K		1050-14#*8+911-3.0"	8	
L		1050-14#*11+911-3.0"	8	
M		1050-14#*7+2024-14#*1 1050-14#*7+1050-14#*3 +911-2.5"	8	

2800G44 D44" H44" L36+1


part	picture	Description	Qty	Check list
N		1050-14#*7+2024-14#*1 1050-14#*7+1050-14#*1 +911-2.5"	8	
O		1050-14#*6+2024-14#*1 1050-14#*6+911-2.5"	8	
P		1050-14#*5+2024-14#*1 1050-14#*5+911-2.5"	16	
Q		1050-14#*5+2024-14#*1 1050-14#*5+911-2.5"	12	
R		1050-14#*4+2024-14#*1 1050-14#*4+911-2.5"	8	
S		1050-14#*3+2024-14#*1 1050-14#*3+911-2.5"	8	
T		1050-14#*4+2024-14#*1 1050-14#*4+911-2.5"	8	
U		1050-14#*4+701-50#	1	
V		1050-14#*10+701-50#	1	

2800G44 D44" H44" L36+1

part	picture	Description	Qty	Check list

## Step 2

## Canopy Installation Instruction

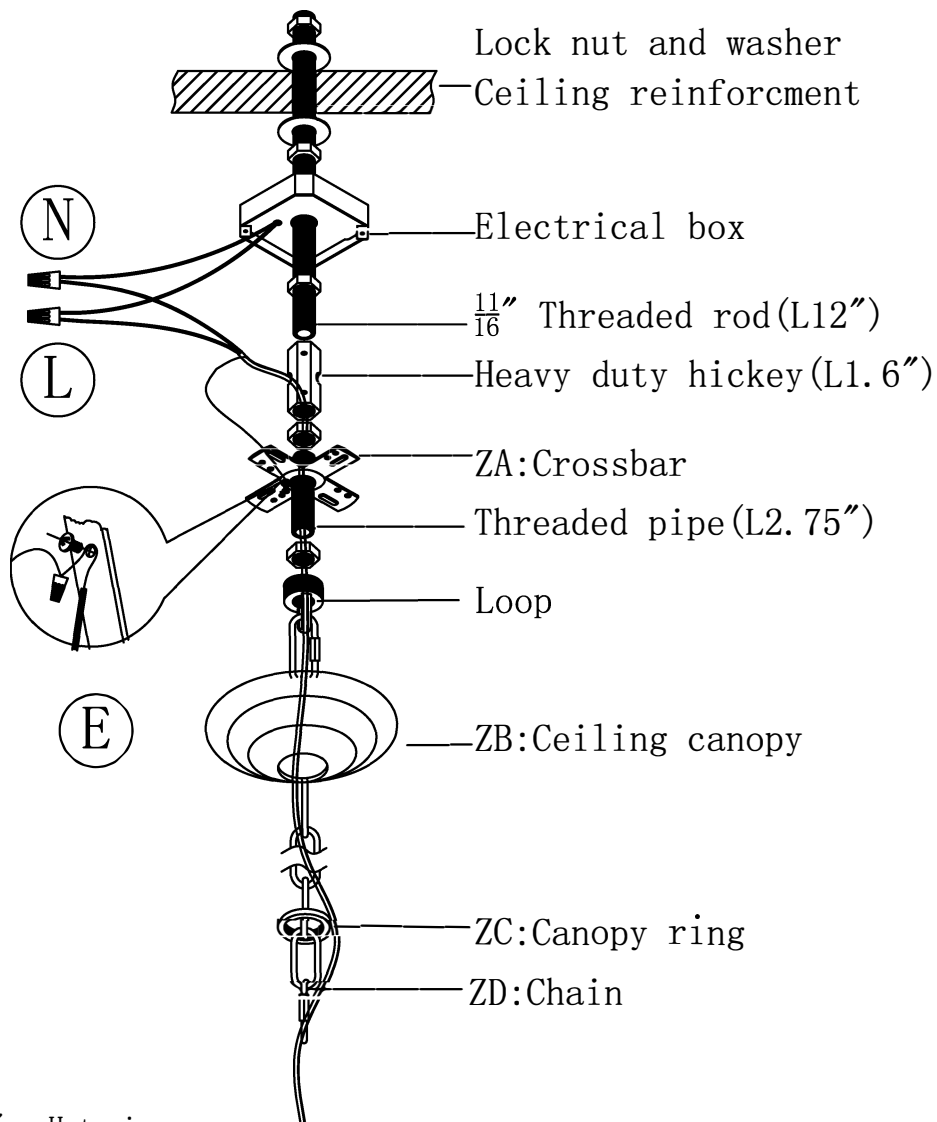


"L" = Hot wire  
 "N" = Neutral wire  
 "E" = Ground wire


**IMPORTANT:** Test sockets with bulb before dressing the fixture.

1. Drill a  $\phi 0.7$ " hole in the ceiling reinforcement to allow a  $\frac{11}{16}$ " threaded rod to pass through.
2. Attach the electrical box to the ceiling reinforcement and pass the  $\frac{11}{16}$ " threaded rod through the box and secure it to the heavy duty hickey.
3. Pass the fixture wires and ground wire through the loop, canopy ring, center hole of canopy and the heavy duty hickey.
4. Pull ceiling wires down through the fixture box and make connection.
5. Screw loop only onto threaded pipe.
6. Hang the fixture on chain.
7. Secure the canopy with canopy ring.


## Frame Assembly Diagram

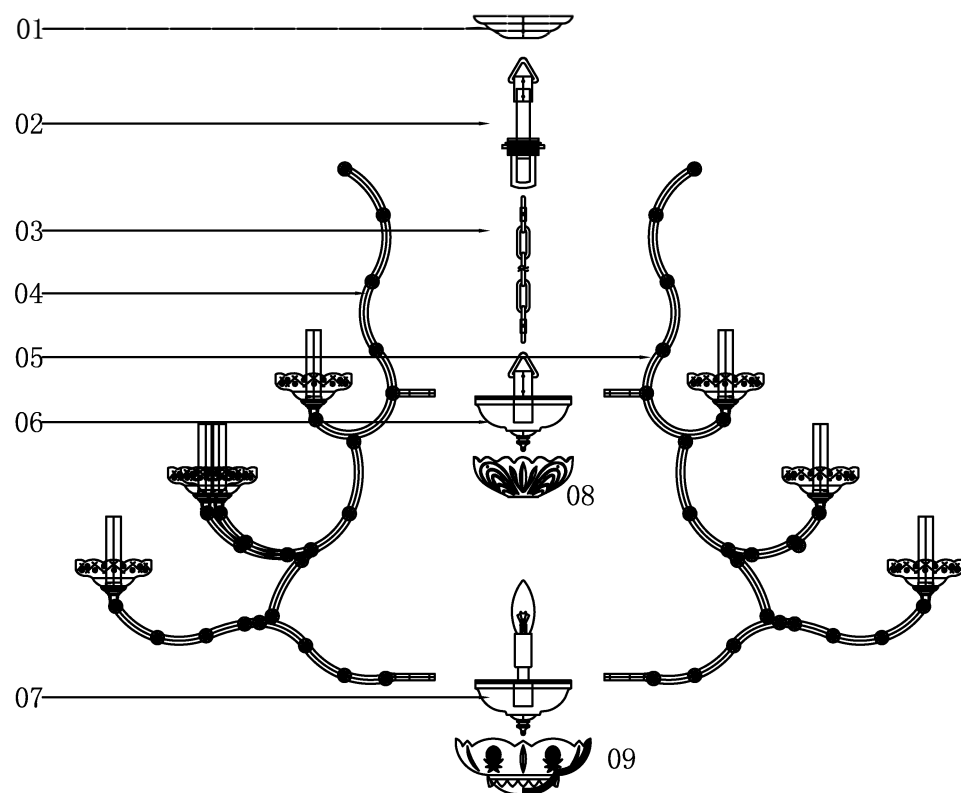

Lamp body (06)  
part list

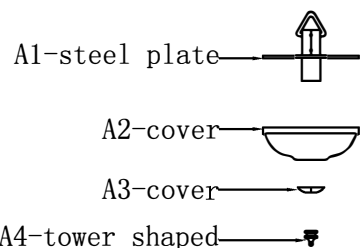

Lamp body (07)  
part list

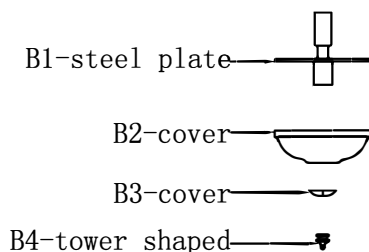

## Step 3

## Frame Assembly Instructions

### Installation:

Please read all instructions carefully. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete.

Please note that each part has been assigned a number. Please proceed in a numerical order.

1. Fix the crossbar to the junction box to the ceiling.
2. Unscrew the loop of the threaded pipe(02), hang the canopy cover(01) into the threaded pipe(02) with ring.
3. Screw the pipe(02) at the crossbar of the heavy duty hickey.
4. Hang the chain(03) on the pipe(02) of the end of the loop with the safe lock.
5. Break up the lamp body(06) A1~A4 and lamp body(07) B1~B4.
6. Unscrew the M5 screws of the steel plate(A1, B1), assemble the lamp arm(05, 06) on the steel plate(A1, B1), fix them with the M5 screws.
7. Connect the wires on the lamp body(07), pull the one of the wire to the lamp body(06), connect it with the main wire at the lamp body(06).
8. Assemble the lamp body(06), add the glass dish(08) on it with the tower shaped(A4), assemble the lamp body(07), add the glass dish(09) on it with tower shaped(B4).
9. Pull the main wire pass the chain(03) to the junction box then connect wires correctly.
10. Fix the canopy cover(01) to the ceiling with the ring.
11. As the crystal dressing instruction, hang the crystal parts.


## Step 4 Crystal Dressing Instructions

1. Hang crystal "A", "B", "C", "D", "E", "F", "G", "H", "I", "J", "K", "L", "S", "U", "V".
2. Connect both ends of T with A,  
Connect both ends of R with C,  
Connect both ends of Q with D,  
Connect both ends of P with F,  
Connect both ends of O with G,  
Connect both ends of N with H,  
Connect both ends of M with I.

## Crystal Dressing Diagram



When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

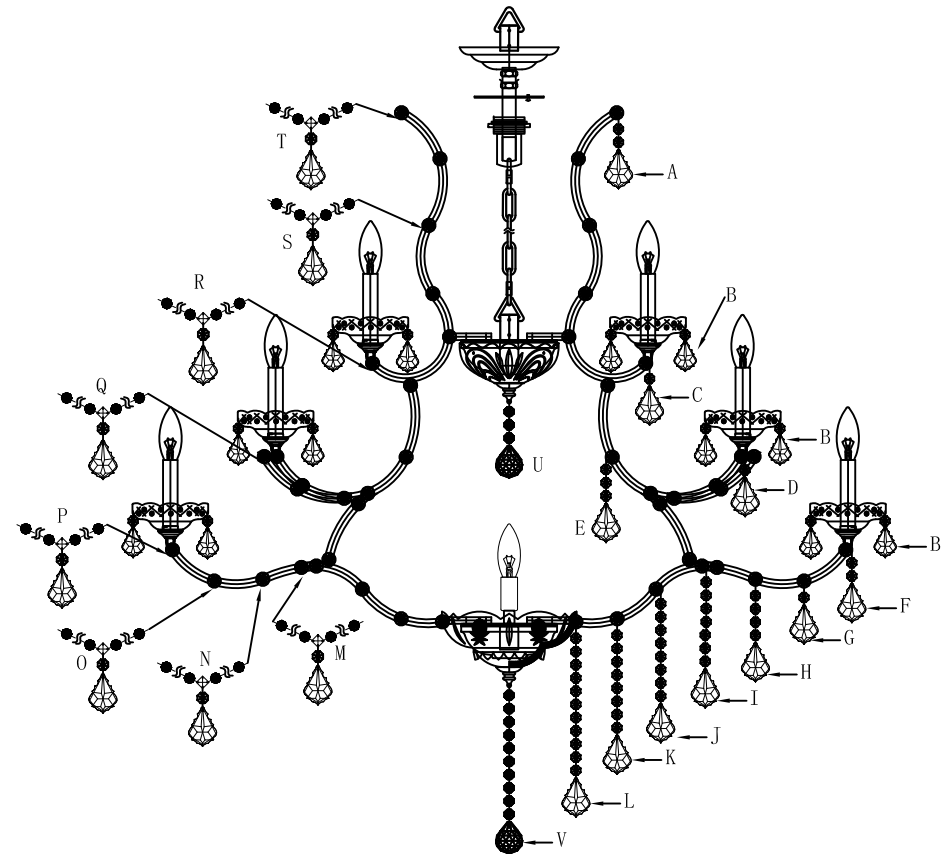

## Congratulations !

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

If you require any additional assistance, please contact us at 1-888-388-3390.

Thank you.

### Cleaning and Maintenance of Chandelier Frame

The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean, soft, dry cloth. Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish. Failure to follow these instructions automatically voids the guarantee.

### Cleaning and Maintenance of Crystals

Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

### To Order Crystal Replacement Parts

Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us at the address shown on the reverse side. For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle and faxing it to our customer service department at 215-423-8882. You will be contacted with prices prior to shipment. All orders must be pre-paid.



## Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of two(2) years from the date of purchase. Our company will at its option, repair or replace any frame that has a defect in the material or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department at the address and phone number shown below. A written return authorization form will be sent to you with specific instructions.

### CUSTOMER SERVICE DEPARTMENT

500-550 E. Erie Avenue

Philadelphia, PA 19134

Tel: 215-423-8880

Fax: 215-423-8882

## Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department at the address on the reverse side. Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reserved the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warranty, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.