

ASSEMBLY INSTRUCTIONS

ITEM NO: WL-2930-DB WL-2930-RU WL-2930-BS WL-2930-AB

***** WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.**


*** These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.**

CAREFULLY UNPACK AND PLACE ALL PARTS ON A SMOOTH SURFACE.

- 1) DRILL 2 HOLES ON THE WALL WITH THE SPACE TO MATCH MOUNTING STRIP (2) AND INSERT PLASTIC ANCHOR (1).
- 2) INSTALL MOUNTING STRIP (2) TO THE WALL WITH SCREW (3).
- 3) ATTACH THE BASE OF THE LIGHT (4) TO THE MOUNTING STRIP AND TIGHTEN WITH SIDE SCREW (5).
- 4) DRILL MORE HOLES ON THE WALL AND THE SPACE OF THE HOLES MUST MATCH THE HOLES ON INNER WIRE COVER (7).
- 5) INSERT PLASTIC ANCHORS (1) INTO THE HOLES AND INSTALL INNER WIRE COVER TO THE WALL WITH SCREWS (8) AND ALIGN THE WIRE THROUGH IT.
- 6) PUT THE OUTER WIRE COVER (9) ON INNER WIRE COVER (7).
- 7) PUT THE SHADE (10) ON THE SOCKET AND TIGHTEN WITH RING (11)
- 8) INSTALL RECOMMENDED BULB (12)
- (NOT INCLUDED IN THE PACKAGE).
- 9) INSERT THE PLUG INTO AN OUTLET.
- 10) TURN ON THE LIGHT AND ADJUST THE SWIVEL (13) TO DESIRED LOCATION.

ENJOY YOUR LIGHT!

**Use 60 Wattage (Maximum)
type A bulb (bulb not included)**

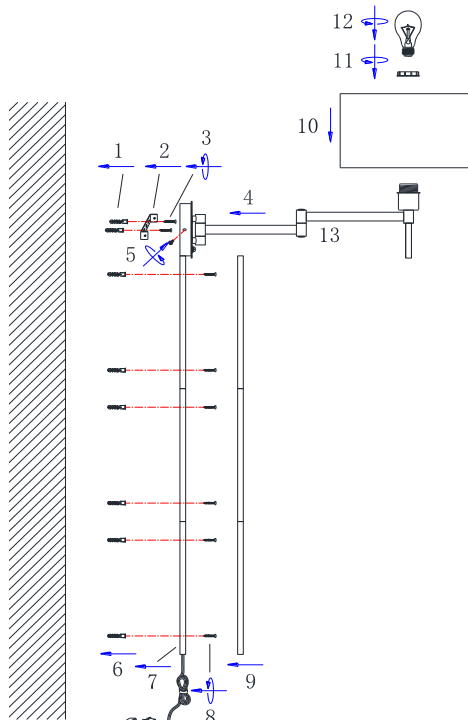

IMPORTANT SAFETY INSTRUCTIONS:

THIS LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A SAFETY FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF IT DOES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS THE PLUG CAN BE FULLY AND EASILY INSERTED. DO NOT ATTEMPT TO ALTER THE PLUG.

***** SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE. *****