

INSTALLATION INSTRUCTIONS

Item#4102-66/84/172 (New. 2022/12/30)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Determine desired hanging height and thread rods (F1, F2 and F3) to all thread (G). Attach canopy (D) by threading onto rod (F1). Carefully pass wires through each rod during assembly.
4. Attach mounting plate (A) to junction box (not included) with mounting screws (B) (Size: #8-32N*L1"). The side of mounting plate (A) marked "GND" with two convex points must face out.

CONNECTING THE WIRES (Fig. 2)

5. Connect electrical wires as shown in fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (A) using green screw provided.
6. Tuck wire connectors neatly inside the junction box.

COMPLETING THE INSTALLATION (Fig. 1)


7. Place canopy (D) over mounting plate (A) and secure with screws (E).
8. Place large glass shade (I), metal cover (J), small glass shade (K) over socket (H). Then secure with socket ring (L).
9. Install (1) one medium base bulb (M) up to 100 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. **—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

Set# A-021-118DH
-Mounting plate
-Ground screw
-Mounting screw *2

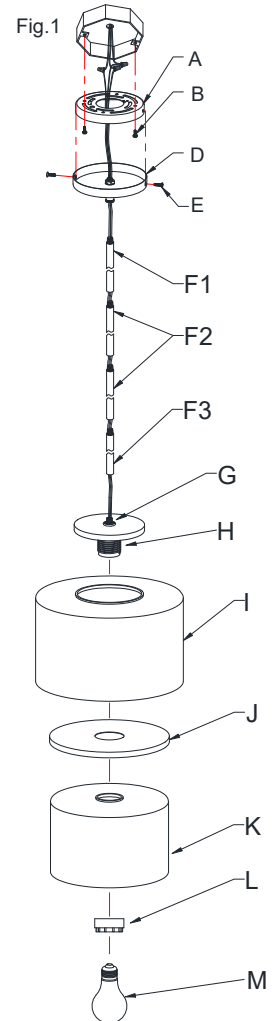

Rod# W32-1-66/84/172 *1 (F1)
W32-1-66/84/172 *2 (F2)
W32-H-66/84/172 *1 (F3)

Fig. 2

