

INSTALLATION INSTRUCTIONS

Item#N7381-613 (New. 2022/05/15)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Loosen screws (D) to remove mounting plate (A) from fixture body (C).
4. Attach mounting plate (A) to junction box (not included) using mounting screws (B) (SIZE: #8-32N, L0.5"). The side of mounting plate marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (A) using green screw provided.
6. Tuck wire connections neatly into junction box.

FINISHING THE INSTALLATION (Fig.1)

7. Place fixture body (C) over mounting plate (A) and secure with screws (D).
8. Place glass shade (E) followed by metal ring (I) over socket (G) and secure with screw shell (J).
9. Thread acrylic rods (H1), (H2) into coupler (F1),(F2).
10. Install (1) one medium base bulb (K) up to 100 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
11. Place cloth shade (L) onto glass shade (E).

Your installation is now complete. Return power to the junction box and test the fixture.

Fig. 1

Set#A-021-122A

- Mounting plate
- Ground screw
- Mounting screw *2

Acrylic rod:
H1:L95mm *2pcs
H2:L155mm *2pcs


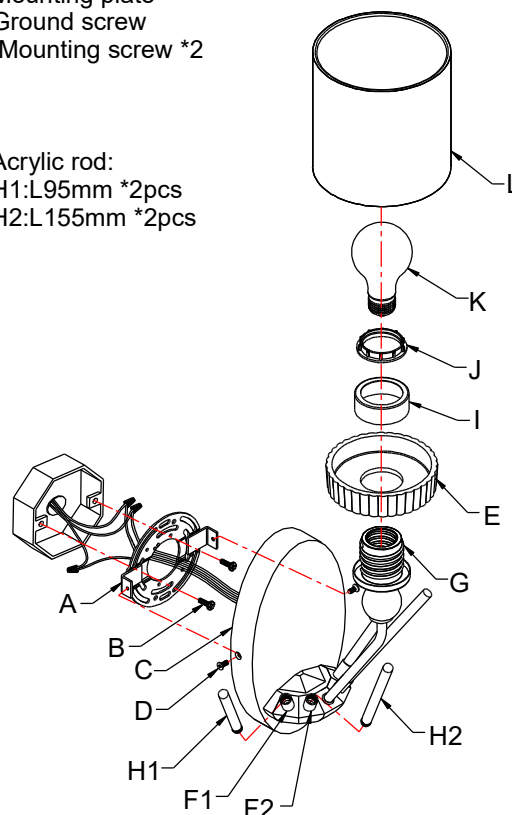


Fig. 2

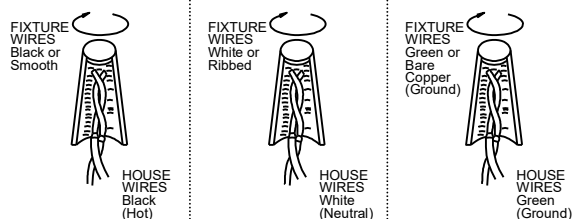

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.