


LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #603-GA





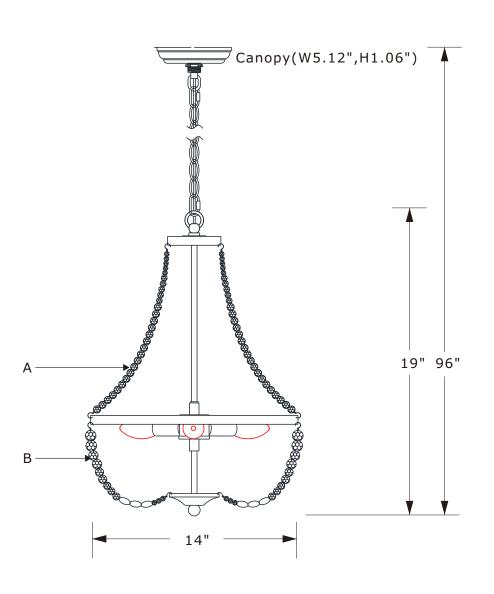



All electrical components must be

installed by a licensed electrician

in accordance with the National

Electric Code and the appropriate

local electrical codes.





You will need 3-Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE

This fixture is DAMP rated

How to Install

- 1.Do a complete inventory of all parts and components before you start installation.
- 2.Attach the Top Stem assembly onto the Light Cluster.
- 3. Attach the Bottom Stem onto the Light Cluster.
- 4. Put the bottom metal cap over the bottom stem and secure it with ball finial.
- 5.Dress the fixture with beads "A" and "B" as illustrated.

Bead Sets

A.24 Sets.

(6)8mm + (5)10mm +

(18)12mm

B.32 Sets.

(2)18mm + (2)16mm +


(2)14mm + (3)12mm +

(3)(20-10)mm + (3)8mm

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.



PART NUMBER MODEL #603-GA

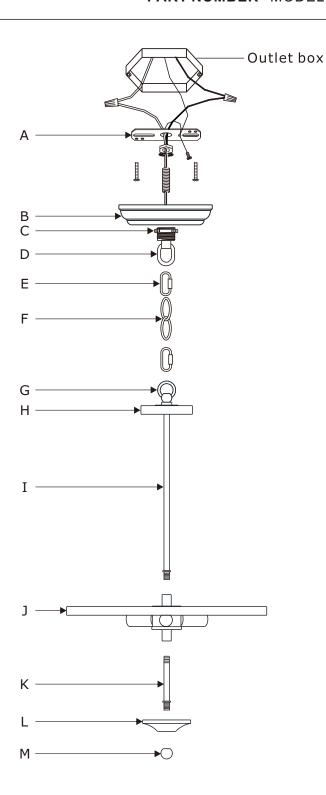

Part Number

- A. (1) Mounting Hardware
- B. (1) Canopy(W5.12",H1.06") #XRE603GACAN5.12IN
- C. (1) Collar Ring
- D. (1) Collar Loop
- E. (2) Quick Link
- F. (1) Hanging Chain(72",4mm) #XRE603GACHA4MM
- G. (1) Fixture Loop
- H. (1) Top Band Ring
- I. (1) Top Stem(11.02",9.7mm)
- J. (1) Middle Band Ring
- K. (1) Bottom Stem(4.33",9.7mm)
- L. (1) Metal Cap
- M. (1) Ball Finial #XRE603GAFIN