


ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0215

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.


NOTES: 1. Before installing, consult local electrical codes for wiring and ground requirements.
2. Read and save this instruction.

Hardware Package (included):

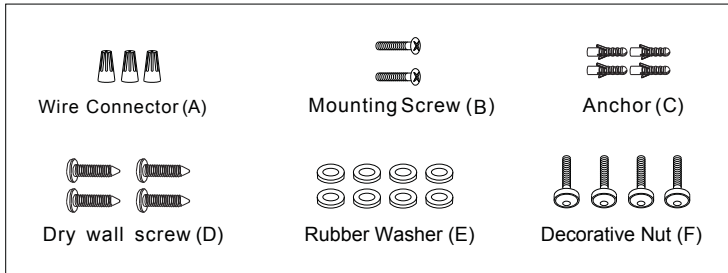

Installation Steps

Turn off the power at fuse or circuit box.

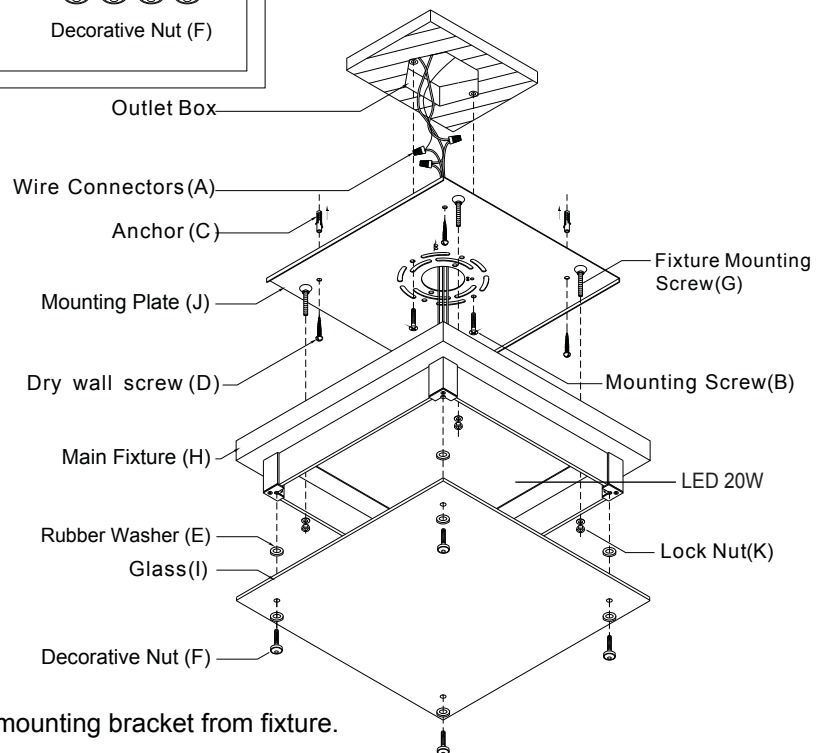



1. Remove four lock nuts(K) to separate the mounting bracket from fixture.
2. Attach the mounting plate(J).
 - a) For wooden mounting place:
Attach the mounting plate(J) to the outlet box using two mounting screws(B) and secure the drywall screws into the mounting holes of the mounting place.
 - b) For cement or drywall mounting place:
Hold the mounting plate to the outlet box and mark the drilling holes on the mounting place for drilling.
Hammer the anchors in the drilling holes until it's flush with the ceiling wall. Fasten the mounting plate by driving the dry wall screws(D) into the anchors(C).
3. Pull out the outlet box wires and the house ground wire from the outlet box. Make wire connections using the wire connectors(A):
 - a. The black wire from the fixture to the black wire from the power source.
 - b. The white wire from the fixture to the white wire from the power source.
 - c. Loop the supply ground wire around the ground screw on the mounting plate and tighten it in place. Connect the fixture ground wire to the supply ground wire using a wire connector(A).
4. Attach the main fixture(H) to the mounting plate and fasten it with four lock nuts(K).
5. Secure the square glass(I) with four decorative nuts and rubber washers.

Turn on the power at fuse or circuit box.

Note: Suggested dimmers are Lutron: MSCL-OP153MH, MACL-153MH, DVWCL-153PH, TGCL-153PH, SCL-153PH.

The following parts are available for re-order if damaged or missing.

Spare Parts List:

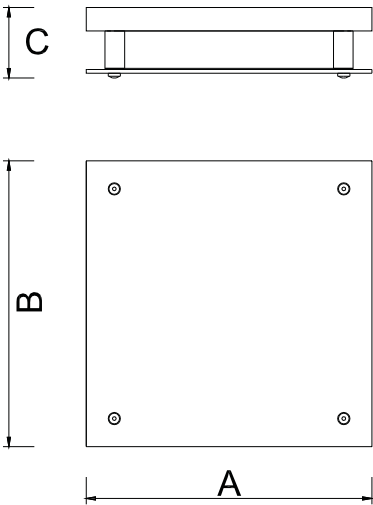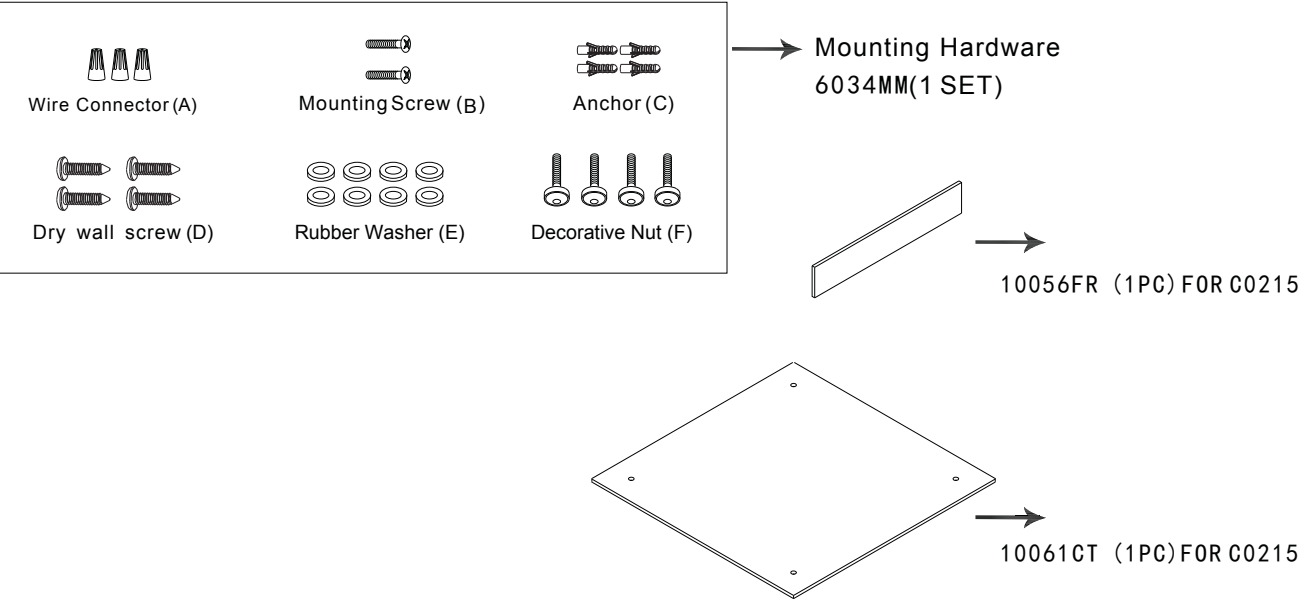

A: 12"
B: 12"
C: 3"