


# ASSEMBLY INSTRUCTION MODEL #ARC-1907-GA-CL-MWP



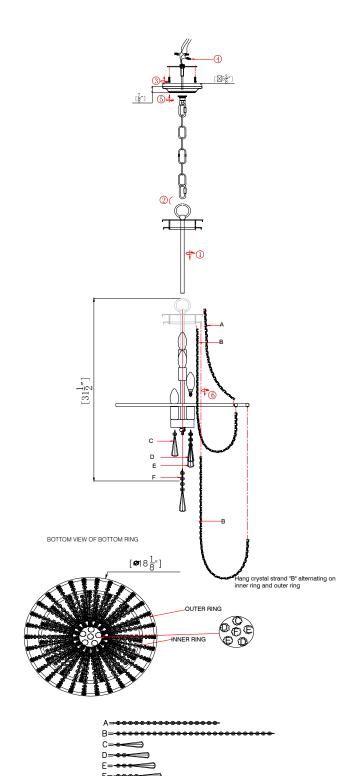

All electrical components must be

installed by a licensed electrician

in accordance with the National

Electric Code and the appropriate

local electrical codes.



You will need 4 Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE

#### **How to Install**

- Attach the mounting strap onto the outlet box by machine screws. Thread the screw collar loop onto the bottom of threaded nipple on the mounting strap.
- 2. Screw the center stem kit onto the frame.
- 3. Decide the preferred hanging height and adjust to the required chain. Hang one end of the chain onto the loop and second end of it onto the screw collar.
- **4.** After the wires are connected, rasie the canopy up against the ceiling and secure it by screw collar loop ring.
- **5.** When you begin to dress the fixture, start with package labeled(A).
- $\textbf{6.} \ \text{IMPORTANT:} Apply \ \text{crystal sets in alphabetical order.}$

## **Crystal Sets**

A. 18sets 21\*14mm

B. 45sets 34\*14mm

C. 1set 1\*14mm+1\*76mm drop

D. 2set 2\*14mm+1\*76mm drop


E. 2set 3\*14mm+1\*76mm drop

F. 1set 4\*14mm+1\*76mm drop

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov



PART NUMBER MODEL #ARC-1907-GA-CL-MWP

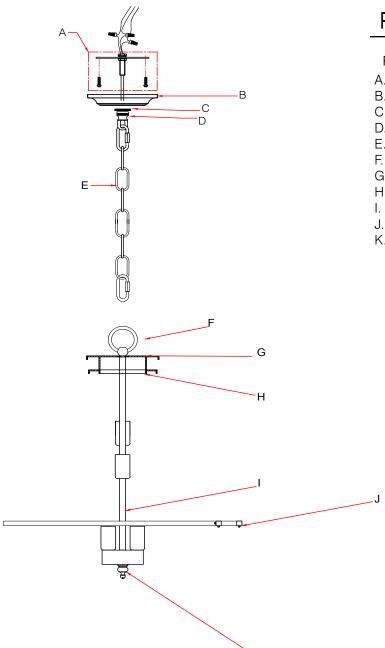

# Part Number

### Part Numbers

- A. (1)-Mounting Hardware
- B. (1)-Canopy;ø5\*H1"(XBN1905GACAN5.375IN)
- C. (1)-Screw Collar Loop Ring
- D. (1)-Screw Collar Loop E. (1)-Chain;ø1/5\*L72"(XBN1905GACHA5MM)
- F. (1)-Fixture Loop;ø2"
- G. (1)-Upper Ring;ø5 1/2"
- H. (1)-Lower Ring;ø5 2/5" I. (1)-Center Stem;L16"
- J. (1)-Bottom Ring;ø18 "
- K. (1)-Bottom Finial;H1 1/5"(XBN1900GAFIN)