





# WYLLIS 12 & 18 FLUSH MOUNTS

KWFM703; KWFM702

## General Product Information



**Please Note:**  
KWFM703 is also TRIAC and 0-10V dimmable.

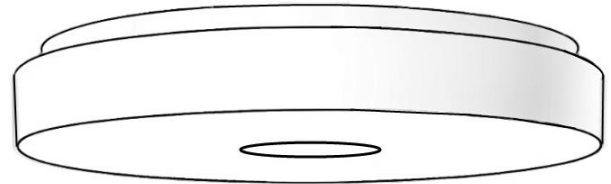

## Suggested/Required Tools



## Safety Information

### CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**USE MINIMUM 90°C SUPPLY CONDUCTORS.**




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

**Please Note:** The LED portion of this fixture is made from alabaster and should be treated with care. Regular dusting with a soft, dry cloth is recommended. Water and harsh cleaning agents can damage the material's surface. If the fixture requires more intensive cleaning, consult a professional.

**Fixtures that are ceiling mounted and weighs more than 50lbs or wall mounted and weighs more than 25lbs should be provided with support independent of the outlet box.**

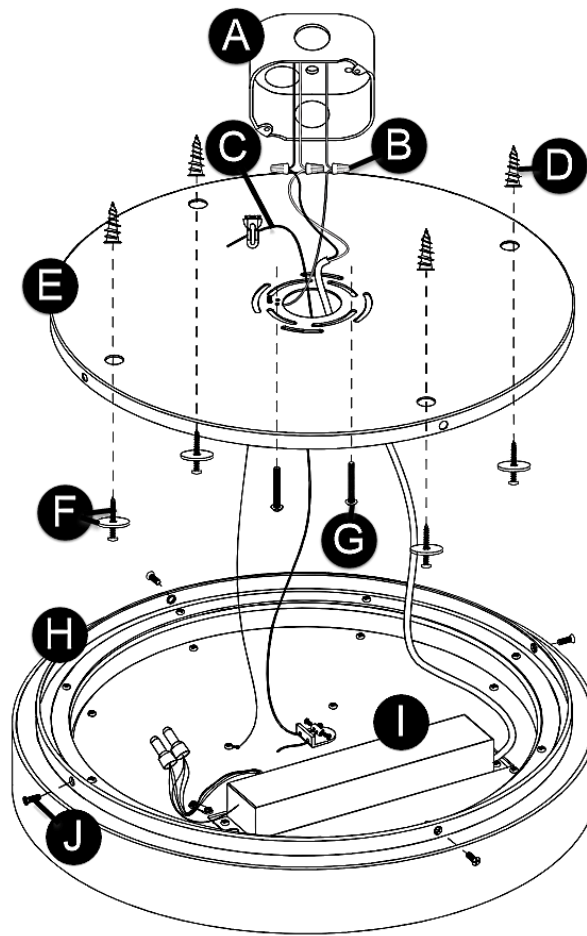

## FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Safety Cable
- D. Anchors
- E. Mounting Plate
- F. Anchor Screws & Washers
- G. Mounting Screws
- H. Fixture
- I. Driver
- J. Fixture Screws

## INSTRUCTIONS

### I. Preparing the Fixture

1. Separate the mounting plate from the fixture by removing the fixture screws.
2. Secure the mounting plate to the junction box using the mounting screws. Then further secure the mounting plate directly to the ceiling with the anchors and anchor screws.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Loop and secure the safety cable over a stable structure that agrees with local building codes.
3. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Neutral driver wire (white) to neutral power line wire
  - b) Hot driver wire (black) to hot power line wire
4. If applicable, for 0-10V (KWFM703 only) dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires if not in use.
5. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
6. Carefully tuck all the wires behind the mounting plate.

### III. Installing the Fixture

1. Mount the fixture onto the mounting plate and secure it in place by installing the fixture screws.