

Gardner Linear Chandelier

CC1166 1.0

GENERATION LIGHTING

Chandelier


GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

CAUTION - RISK OF FIRE
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.

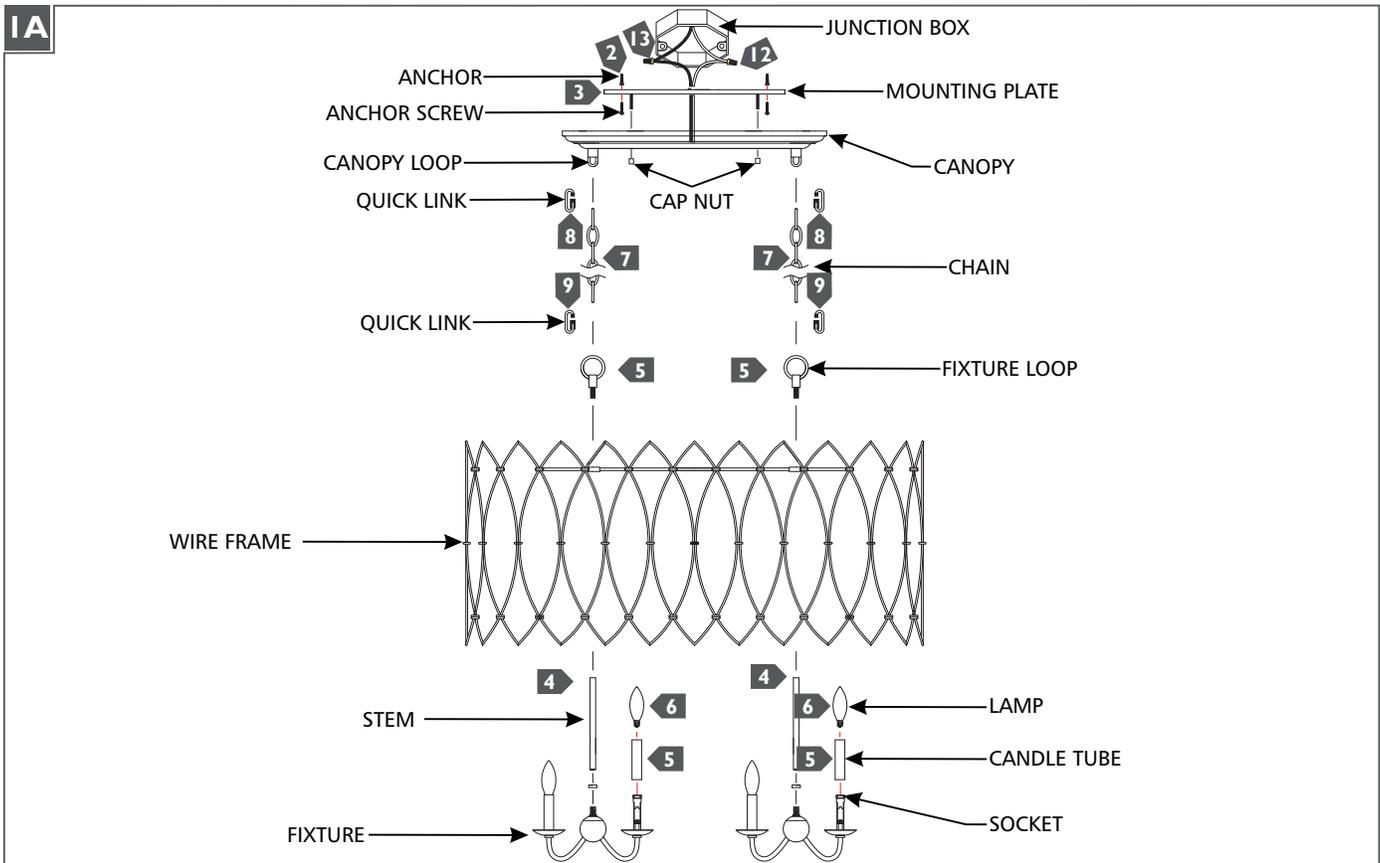

- 1** Temporarily install the mounting plate to the junction box and mark the anchor hole locations through the mounting plate holes, then remove the mounting plate.
- 2** Drill appropriate sized holes at the marked locations and install the anchors.
- 3** Secure the mounting plate to the junction box and screw the anchor screws into the anchors.
- 4** Place the spacer onto the fixture and secure in place by screwing the stem onto the fixture. Repeat for each side. Then Place the wire frame over the stems and secure it in place by screwing the fixture loops onto the stems.
- 5** Install the candle tubes by slipping them over the sockets.
- 6** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.
- 7** Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 8** Install the quick link to bottom end of the chain, then secure the quick link onto the fixture loop.
- 9** Install the quick link onto the remaining end of the chain, then secure the quick link onto the canopy loop.
- 10** Weave the cord through the chain, canopy, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 11** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 12** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 13** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 14** Neatly place all wires into the junction box/canopy, place the canopy onto the mounting plate, and secure it in place using cap nuts.

SAVE THESE INSTRUCTIONS!

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.generationlighting.com

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.