

## Installation manual for

3503G34C/G

Dimensions : D33.5" H38.3"

Collection: Monroe

Bulb Type : LED PCB 180W 4000K/3000K

Lamp Weight: 105.8 LBS Total Weight: 115 LBS



Thank you for choosing our product(s).

Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instructions and read carefully for proper installation. If you have any questions, our professional customer service team is committed to assisting you, please call our toll free





### SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF. BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.

### CAUTION


- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit: 110 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

### Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions, please call our Customer Service department at 1-888-388-3390. Please have model number (at the front page), where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

3503G34 D33.5" H38.3"

# Frame Assembly Diagram

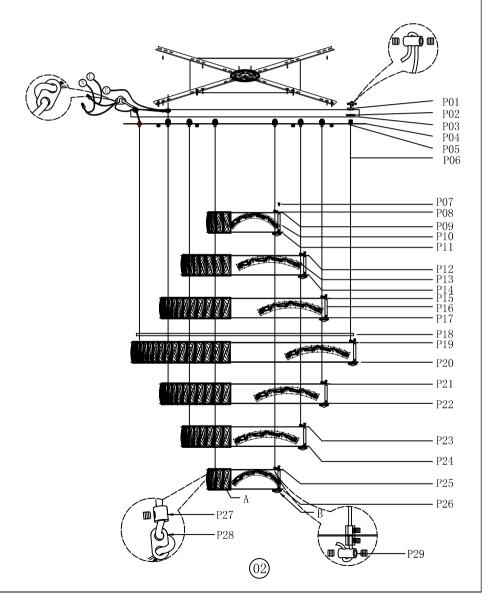

Step 1

Please use the partslist to ensure you are not missing any parts.


3503G34

PARTS LIST

Part #	Picture	Description	Qty	Check list
ZA	×	bracket system	1	
ZB	) <del></del>	M4*40 screw	8	
ZC	<b>}</b>	5/32*40 screw	2	
ZD		M5 screw cap	8	
ZE	Cang.	plastic anchor screw	8	
ZF	▶	junction caps	3	
P01	В	M12 nut	24	
P02	-	M12 metal pad	24	
P03		D31.5"H1" canopy box	1	
P04		<b>ø</b> 33.5″ S.S plate	1	
P05	-	M12*28 wire adjuster	24	
		ssl 2*24# <b>Ø</b> 3.6mm*47.2″ electric wire	3	
		ssl 2*24# <b>Ø</b> 3.6mm*43.3″ electric wire	2	
		ssl 2*24# <b>Ø</b> 3.6mm*63″ electric wire	4	
P06	~~	ssl 2*24# <b>¢</b> 3.6mm*70.9″ electric wire	1	
	1	ssl 2*24# <b>¢</b> 3.6mm*55.1″ electric wire	3	
		ssl 2*24# <b>¢</b> 3.6mm*86.6″ electric wire	3	
		ssl 2*24# <b>Ø</b> 3.6mm*66.9″ electric wire	3	
		ssl 2*24# <b>Ø</b> 3.6mm*74.8″ electric wire	2	
		ssl 2*24# <b>Ø</b> 3.6mm*94.5″ electric wire	1	
		ssl 2*24# <b>¢</b> 3.6mm*82.7 electric wire	2	
P07	<b>D</b>	<8*H8 wire fixer	48	
P08	(mem.)	M4*10 screw	84	
P09	0	<b>ø</b> 10.6″ S.S ring	1	
P10		L180*H55-4W high voltage LED PCB	6	
P11	0	Ø10.6″ S.S ring	1	

Picture	Description	Qty	Check list
0	Ø17.7″ S.S ring	1	
	L200*H43-4W high voltage LED PCB	34	
0	D17.7" pipe ring	1	
0	<b>∅</b> 23.6″ S.S ring	1	
	2.4" metal pipe	84	
0	Φ23.6" S.S ring	1	
	D30" pipe ring	1	
0	<b>Ø</b> 31.5″ S.S ring	1	
0	φ31.5″ S.S ring	1	
0	\$\phi_{23.6"}\$ S.S ring	1	
0	<b>Ø</b> 23.6″ S.S ring	1	
0	Ø17.7″ S.S ring	1	
0	D17.7" pipe ring	1	
0	<b>Ø</b> 10.6″ S.S ring	1	
O	<b>Ø</b> 10.6″ S.S ring	1	
0	14*10*2.5mm	14	
0	<b>ø</b> 8∗H18 wire fixer	34	
	1.2"3"crystal	576	
$\boxtimes$	1.2"1.2"crystal	240	
		Ø17. 7" S. S ring         L200*H43-4W high voltage LED PCB         D17. 7" pipe ring          Ø23. 6" S. S ring          2. 4" metal pipe          Ø23. 6" S. S ring          Ø31. 5" S. S ring          Ø31. 5" S. S ring          Ø23. 6" S. S ring          Ø23. 6" S. S ring          Ø17. 7" S. S ring          Ø17. 7" pipe ring          Ø10. 6" S. S ring          Ø10. 6" S. S ring          Ø10. 6" S. S ring          Ø8*H18 wire fixer          Ø8*H18 wire fixer	Ø17. 7" S. S ring       1         L200*H43-4W high voltage LED PCB       34          D17. 7" pipe ring       1          Ø23. 6" S. S ring       1          2. 4" metal pipe       84          Ø23. 6" S. S ring       1          Ø31. 5" S. S ring       1          Ø31. 5" S. S ring       1          Ø23. 6" S. S ring       1          Ø23. 6" S. S ring       1          Ø17. 7" S. S ring       1          Ø17. 7" S. S ring       1          Ø10. 6" S. S ring       1          Ø10. 6" S. S ring       1          Ø10. 6" S. S ring       1          Ø8*H18 wire fixer       34          Ø8*H18 wire fixer       34


Step 2
Canopy Installation Instruction

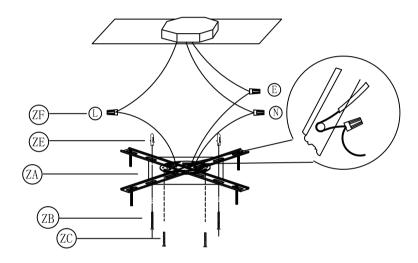

- 1. Drill two holes on the ceiling and put the plastic anchor screw(ZE) into the holes(If the wall is wood made, this step can be ignored);
  2. Attach the Bracket (ZA) to the Junction Box with two screws(ZC).
- 3. Fix the bracket on the ceiling with screws (ZB) 4. Connect the wires with electrician approved junction caps (ZF).

 $3503G34 \quad \text{D33.} \ 5'' \ \text{H38.} \ 3''$ 

Step 3 Frame Assembly Diagram

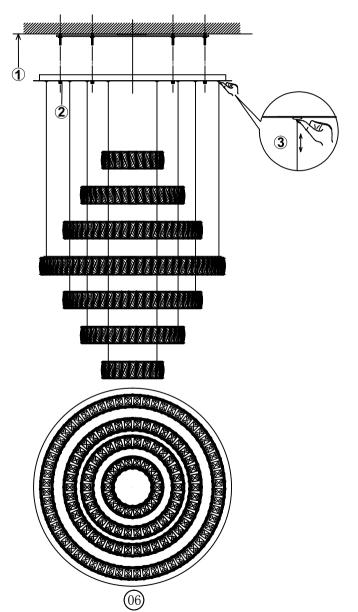



# Frame Assembly Instructions

#### Installation:

Please read all instructions carefully, before you proceed to install. Make sure that the power supply is turned off and remained off until the installation is completed. Please note that each step has been assigned a number. Please proceed following the numerical order.

- 1. put the fixture on the bracket;
- 2. fix the fixture on the bracket with screw (ZD);
- 3. press down the metal pipe on the wire adjuster (P05), adjust the height of the lamp by push up or pull down the wire (P06). Release (P05), the wire length will be kept.

# Congratulations!

You are now done installing your Elegant lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

If you require any additional assistance, please contact us at 1-888-388-3390.

Thank you!

## Cleaning and Maintenance Instruction

The frame and canopy surface is stainless polished. Please use a clean, soft and dry cloth to clean. Do not use any hard object or tools to scratch on the surface of the metal. Failure to follow these instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

### To Order Replacement Parts

Please contact the store where the product was purchased or contact us at the address shown on the reverse side. For ease of ordering, you may use the original parts list, indicating the model number, part number and quantity and faxing it to our customer service department at 215-423-8882. You will be contacted with prices prior to shipment. All orders must be pre-paid.

### Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of two (2) years from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department at the address and phone number shown below. A written return authorization form will be sent to you with specific instructions.

CUSTOMER SERVICE DEPARTMENT 500-550 E. Erie Avenue Philadelphia, PA 19134

Tel: 215-423-8880 Fax: 215-423-8882

### Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department at the address on the reverse side. Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warrantee, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.