


ISLANDER®

FP320**1 Ceiling Fan

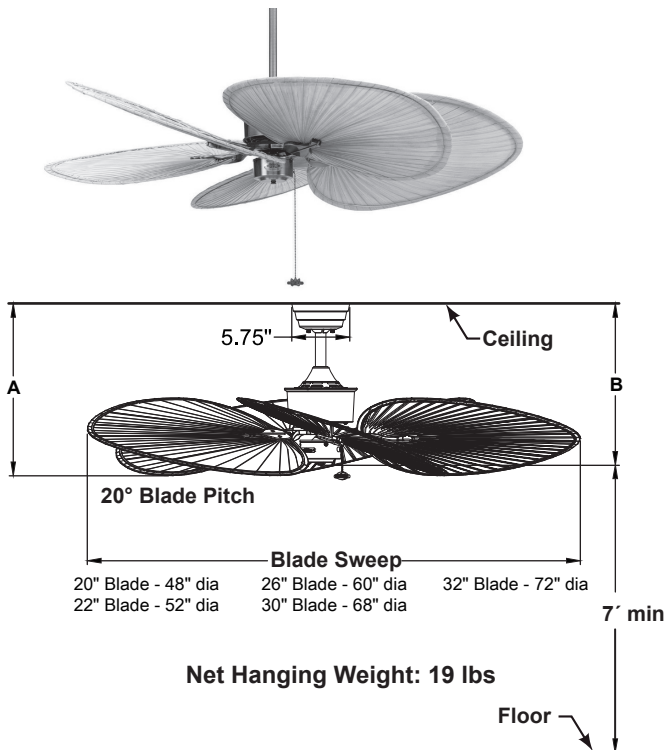

Available Finishes	
AB	Antique brass
OB	Oil-rubbed bronze (Damp)
PW	Pewter
RS	Rust (Damp)

	A	B
Fan w/6" downrod	17.11"	16.07"
Fan w/12" downrod	23.11"	22.07"
Fan w/18" downrod	29.11"	28.07"
Fan w/24" downrod	35.11"	34.07"
Fan w/36" downrod	47.11"	46.07"
Fan w/48" downrod	59.11"	58.07"
Fan w/60" downrod	71.11"	70.07"
Fan w/72" downrod	83.11"	82.07"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

FK2100 AC motor is designed for optimal performance with this fan.

FAN SPEEDS:

Material, shape and size of fan blade will affect fan speed. In general, smaller blades will turn faster than larger ones and narrower blades will turn faster than the wider ones.

BLADES:

A variety of 5-blade sets are available in palm, bamboo, wood and composite materials. The fan can be configured using 4 blades and blade holders to increase speed and airflow. See our catalog or visit www.fanimation.com for blade options.

CONTROL OPTIONS:

Optional CW1, CW1SW, CW2, CW5, CWRL4 and CW60WH wall controls are available and optional BTCR9, C4, CRL4WH and CRL8TS remote controls with receiver unit and BTR9 receiver unit are available—sold separately. Optional C21 wall control and TR20WH remote control are available with use of optional SW50 switch cap receiver—all sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 6" long wet-location downrod (DR1-6). Optional wet-location downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is dry location rated only, except where (Damp) is noted next to above listed finish codes.

Airflow / Energy Efficiency Info (120V) Airflow measured with BPD4 Blade in 52" sweep					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	111	4010	47	0.70	85
Med	70	2172	62	0.46	35
Low	35	1159	129	0.23	9

Energy Guide FTC test with BPD4 Blade			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
50	1927	14	38