


**DRONE™**

# FPD6235\*\* Ceiling Fan

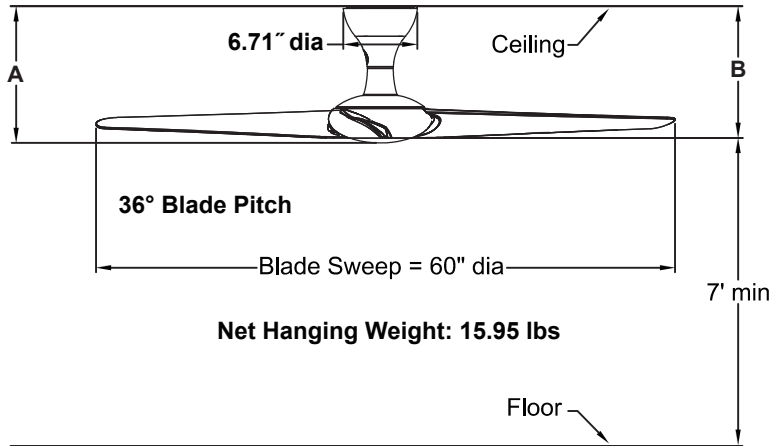

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

158 x 22 sensorless DC motor is designed for optimal performance with this fan.

**BLADES:**

A set of three 30" composite blades is included.

**CONTROL OPTIONS:**

TR205 hand-held remote control is included. Push button remote control with variable fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206 wall control available—sold separately. Instructions are provided with each control.

**EXTENSION ROD OPTIONS:**

Optional extension rod are available in 6", 12", 24", 36" and 48" lengths — all sold separately. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for extension rod options.

**LOCATION USE:**

Fan is rated for dry and damp locations.

	A	B
<b>FPD6235 Ceiling Fan</b>	12.37"	11.91"
Fan w/ET6235-6" Extension Rod	18.37"	17.91"
Fan w/ET6235-12" Extension Rod	24.37"	23.91"
Fan w/ET6235-24" Extension Rod	36.37"	35.91"
Fan w/ET6235-36" Extension Rod	48.37"	47.91"
Fan w/ET6235-48" Extension Rod	60.37"	59.91"

<b>Available Finish</b>	
GBL	Glossy Black with Glossy Black Blade
GWH	Glossy White with Glossy White Blade
SL	Sliver with Sliver Blade

<b>Airflow / Energy Efficiency Info (120V)</b>					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	150	8877	242	0.45	37
Med	87	5204	731	0.11	7
Low	30	1853	846	0.05	2

<b>Energy Guide FTC</b>			
Power (Watt)	Total Air Delivery (CFMave)	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
21	3410	\$ 6	160