


ODYN™ CUSTOM



MAD8152** Ceiling Fan

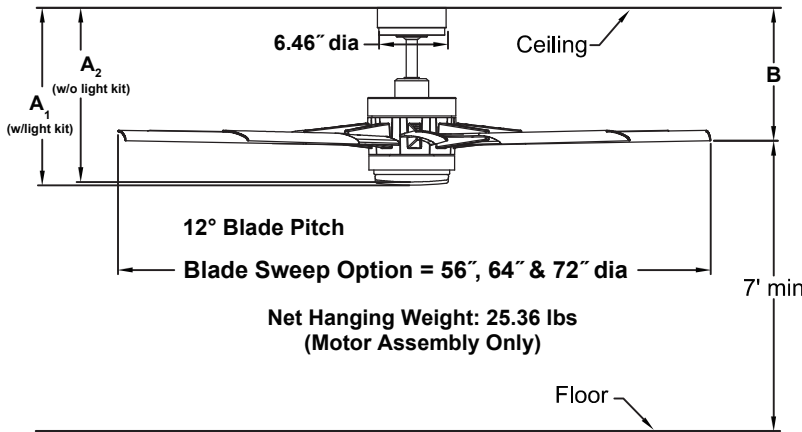

	A ₁	A ₂	B
Fan w/6" downrod	16.64"	16.33"	12.46"
Fan w/12" downrod	22.64"	22.33"	18.46"
Fan w/18" downrod	28.64"	28.33"	24.46"
Fan w/24" downrod	34.64"	34.33"	30.46"
Fan w/36" downrod	46.64"	46.33"	42.46"
Fan w/48" downrod	58.64"	58.33"	54.46"
Fan w/60" downrod	70.64"	70.33"	66.46"
Fan w/72" downrod	82.64"	82.33"	78.46"

Available Finishes	
BLW	Black with Opal Frosted Glass/Steel Cap
BNW	Brushed Nickel with Opal Frosted Glass /Steel Cap
DZW	Dark Bronze with Opal Frosted Glass/Steel Cap
GRW	Matte Greige with Opal Frosted Glass/Steel Cap
MWW	Matte White with Opal Frosted Glass/Steel Cap

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

DC165NM sensorless DC motor is designed for optimal performance with this fan.

BLADES:

A set of nine 24", 28" and 32" all weather composite blades —sold separately.

LIGHTING OPTIONS:

One 18-watt LED included.

CONTROL OPTIONS:

TR205D hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206D wall control and WFR8152 WiFi receiver unit are available—sold separately. Instructions are provide with each control.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 6" long wet-location downrod (DR1SS-6). Optional wet-location downrods are available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 24" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Option close-to-ceiling kit is available. Call technical support for more information.

LOCATION USE:

Fan is rated for dry, damp and wet locations.

Airflow / Energy Efficiency Info (120V) test with BPW8152-72 Blade in 72" sweep					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 th)	84	8813	258	0.44	34
Med (9 th)	58	6087	538	0.18	11
Low (1 th)	29	2928	983	0.06	3

Energy Guide FTC Measured with BPW8152-72 Blade in 72" sweep			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
18	5639	5	305

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1500	3000	90%