

SL-16-MR16 UP/DOWN LIGHTS

landscape • entertainment • architectural • hospitality • illumination







WALL MOUNT UP/DOWN SL-16-MR16



SPECIFICATIONS

CONSTRUCTION: 316 stainless steel or brass; cylinder and canopy

LENS: Clear tempered flat glass

CANOPY GASKET: Black newsponge closed cell .190" thickness

LAMP SUPPLIED: 2×20 watt MR16 FL(BAB) 5000 hours average rating (40w total max) **LAMP OPTIONS:** We recommend 20 watt MR16 ULTRA10, 000 hours average rating; 20 watt MR16 TITAN 18, 000 hours average rating; $4 \times 4 \times 10^{-5}$ watt MR16 TITAN 18, 000 hours average rating; $4 \times 4 \times 10^{-5}$ watt MR16 TITAN 18, 000 hours average rating; $4 \times 4 \times 10^{-5}$ watt MR16 TITAN 18, 000 hours average rating; $4 \times 4 \times 10^{-5}$ watt MR16 TITAN 18, 000 hours average rating; $4 \times 4 \times 10^{-5}$ watt MR16 TITAN 18, 000 hours average rating; $4 \times 4 \times 10^{-5}$ watt MR16 TITAN 18, 000 hours average rating; $4 \times 4 \times 10^{-5}$ watt MR16 TITAN 18, 000 hours average rating; $4 \times 4 \times 10^{-5}$ watt MR16 TITAN 18, 000 hours average rating; $4 \times 4 \times 10^{-5}$ watt MR16 TITAN 18, 000 hours average rating; $4 \times 4 \times 10^{-5}$ watt MR16 TITAN 18, 000 hours average rating; $4 \times 4 \times 10^{-5}$ watt MR16 TITAN 18, 000 hours average rating; $4 \times 4 \times 10^{-5}$ watt MR16 TITAN 18, 000 hours average rating; $4 \times 4 \times 10^{-5}$ watt MR16 TITAN 18, 000 hours average rating; $4 \times 4 \times 10^{-5}$ watt MR16 TITAN 18, 000 hours average rating; $4 \times 4 \times 10^{-5}$ watt MR16 TITAN 18, 000 hours average rating $4 \times 4 \times 10^{-5}$ watt MR16 TITAN 18, 000 hours average rating 4×10^{-5} watt MR16 TITAN 18, 000 hours average rating 4×10^{-5} watt MR16 TITAN 18, 000 hours average rating 4×10^{-5} watt MR16 TITAN 18, 000 hours average rating 4×10^{-5} watt MR16 TITAN 18, 000 hours average rating 4×10^{-5} watt MR16 TITAN 18, 000 hours average rating 4×10^{-5} watt MR16 TITAN 18, 000 hours average rating 4×10^{-5} watt MR16 TITAN 18, 000 hours average rating 4×10^{-5} watt MR16 TITAN 18, 000 hours average rating 4×10^{-5} watt MR16 TITAN 18, 000 hours average rating 4×10^{-5} watt MR16 TITAN 18, 000 hours average rating 4×10^{-5} watt MR16 TITAN 18, 000 hours average rating 4×10^{-5} watt MR16 TITAN 18, 000 hours average rating 4×10^{-5} watt MR16 TITAN 18, 000 hours average rating 4×10^{-5} watt MR16 TITAN 18, 000 hours

SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

WIRING: Black and 2 White 250°C silicone lead wires


CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable

(12/2, 10/2 or 8/2 only)

MOUNTING: Canopy included with 2 stainless steel or brass #2 Phillips, flat head, wood screws

FINISH: Stainless Steel-Machined stainless steel only Brass-Unfinished brass. Optional finishes available

DOWN LIGHT MODEL AVAILABLE SEE SL-16-DMR16

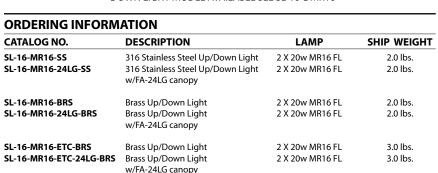

COLOR/BEAM/GLARE CONTROL ACCESSORIES


FA-08-21 Round 1/8" Black Hex Cell Louver
FA-11-BLUE Blue Tempered Flat Glass Lens
FA-11-AMBER Amber Tempered Flat Glass Lens
FA-11-RED Red Tempered Flat Glass Lens
FA-104-SB Wide Spread Sand Blasted Glass Lens

SL16-MR16-SS



SL16-MR16-ETC-BRS

LIGHT DISTRIBUTION AND PHOTOMETRICS



SL-16 Light Distribution and Photometrics 6 ft. (1.8m) radius



SL-16 Light Distribution and Photometrics 5 ft. (1.5m) radius


IP65 C € Intertek


	Intertek
JOB INFORMATION	
Туре:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	
FOCUS INDUSTRIES INC. 25301 COMMERCENTRE DRIVE LAKE FOREST, CA 92630	www.focusindustries.com sales@focusindustries.com (949) 830-1350 • FAX (949) 830-3390

Black Texture Antique (Standard) Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT -ATV	-BRT	-CAM	-WTX	-НТХ	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT




WALL MOUNT UP/DOWN SL-16-MR16






SL16-MR16-ETC



SL16-MR16-24LG



SL16-MR16-ETC-24LG