

INSTALLATION INSTRUCTION


For Model # P611-077L as a fixture unit

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.


MOUNTING THE FIXTURE, HARDWARE VERSION

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.
3. Disconnect the wire nuts to remove the cord and plug
4. Secure mounting back plate (J) to the outlet box with screws (O) (SIZE: **#5-32N*L0.6"**). The side of the mounting back plate marked "GND" must face out.

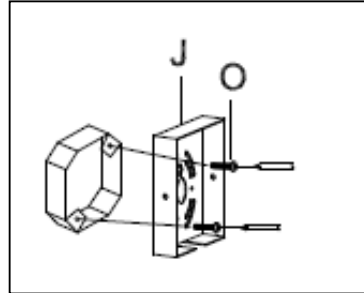

CONNECTING THE WIRES (Fig. 5)

5. Connect the electrical wires as shown in **Fig.5**, making sure that all wire nuts (N) are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate by using the green screw provided.

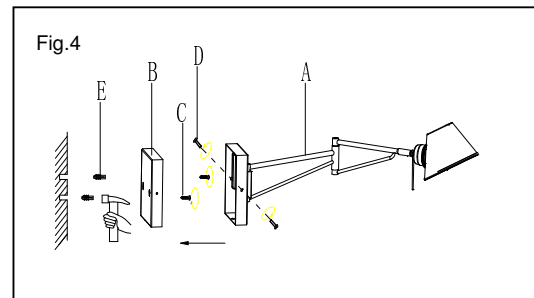


FINISHING THE INSTALLATION (Fig. 4)

6. Align fixture body (A) over mounting back plate (J) and secure with the mounting screws provided
7. Insert the cap into the bottom hole of the fixture body (A).

(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)


Your installation is now complete. Return power to the outlet box and test the fixture.

Fig. 5

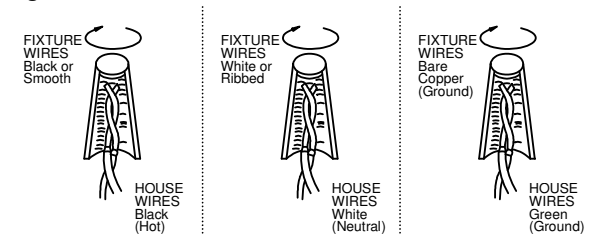

FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

SUPPLY CONDUCTORS

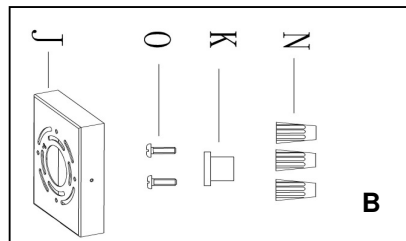

NOTE: Illustration on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Remove the cord and plug by disconnecting the wire nuts to the power cord (CAUTION/ATTENTION : CAN NOT RETURN TO PLUG VERSION ONCE THE CORD AND PLUG HAVE BEEN REMOVED).

Spare Parts Bag B:

N: P4 Wire Nuts (3PCS)

K: Cap--- Dia12mm * H9.5mm (1PC)

O: Screw--- 8#-32N*0.6"L (2PCS)

J: Back Plate--- 5-1/2"*4-1/2"*1-1/8" (1PC)

