


# assembly instructions

Family: Mariner | Item No. 2535 RZ



## start here

Drawing 1 - Strap Detail

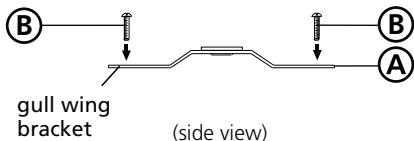


1

- Find a clear area in which you can work.
- Unpack fixture and glass from carton.
- Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first mounting the mounting strap to the junction box, making all necessary electrical connections, mounting the fixture to the wall, and then installing the glass.**

Drawing 2 - Fixture Mounting

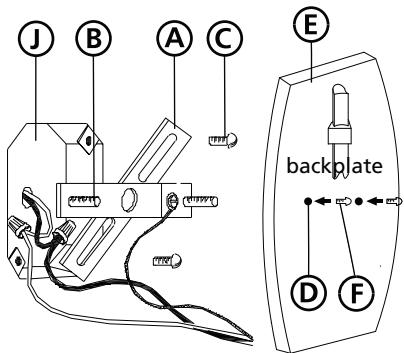

2


- This fixture is designed to provide the option of having the long decorative tail attached to the backplate or changing to the small decorative knob. To change this piece follow steps 1 & 2.

  - Remove hex nut (10) from inside backplate, allowing the tail/knob to be removed - see **Drawing 3**.
  - Slip stud (11) of tail/knob through hole in bottom of backplate, and thread hex nut (10) onto stud (11), tighten with wrench.

3

- Prepare mounting strap (A) by threading the two long mounting screws (B) into the back of the gull wing bracket - see **Drawing 1**.
- Be sure the holes into which the screws are threaded match the spacing of holes (D) in the back plate (E) - see **Drawings 1 and 2**.
- Attach mounting strap (A) to junction box (J) using two 8-32 screws (C) 1" long (not provided) - see **Drawing 2**.

Drawing 3 - Fixture Assembly

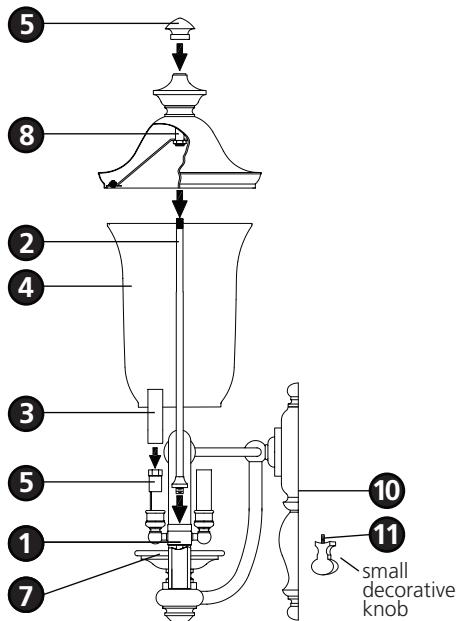

4

- Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (**I.S. 18**) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

5

- Slip the two mounting screws (B) through the two mounting holes (D) in the backplate (E) - see **Drawing 2**.
- While holding fixture in place, thread the two ball knobs (F) onto mounting screw (B) and tighten.

6

- To install glass, thread center stem (2) into cluster assembly (1) - see **Drawing 3**.
  - Slip candle sleeve (3) over exposed socket (6).
  - Fixture can now be lamped accordingly
  - Slip glass (4) over center stem (2) and cluster assembly (1), making sure bottom edge of glass fits inside the edge of glass plate (7).
  - Slip center stem (2) through rooftop center tube (8), making sure glass (4) fits inside recess of the the roof.
  - Thread finial (6) onto center stem (2).
- Note: Over tightening could cause glass damage.

Note: Maximum wattage for 2535 fixture is 40 watts per bulb.

2.7.08