

Glass Installation Instructions

C67

Pluto Table Lamps 274120 & 274120C

Page 1 of 1

To Install Bulb & Glass (Figures 1 & 2)


Component Parts

A Fixture	F Rubber Washer (2)
B Socket	G Nut
C Glass	H Cap
D Screw	
E Steel Washer (2)	


1. Carefully unpack the lamp from the carton.
2. Unthread cap (H) from screw (D).
3. Remove nut (G), first steel washer (E), and first rubber washer (F) from screw (D). Save for later use. Parts ship installed.
4. Slip screw (D) with steel and rubber washer (E&F) up through hole in glass (C).
5. Slide remaining rubber washer (F) onto screw (D) followed by steel washer (E). Thread nut (G) onto screw (D) and tighten. (Figure 1)

Note: Be sure not to over tighten the nut.

6. Install bulb. (not included) Bulb is included with the "C" version.
7. Tilt glass (C) over bulb. Slide screw (D) up through hole in top of fixture (A). Thread cap (H) onto end of screw (D) to secure glass (C). (Figure 2)

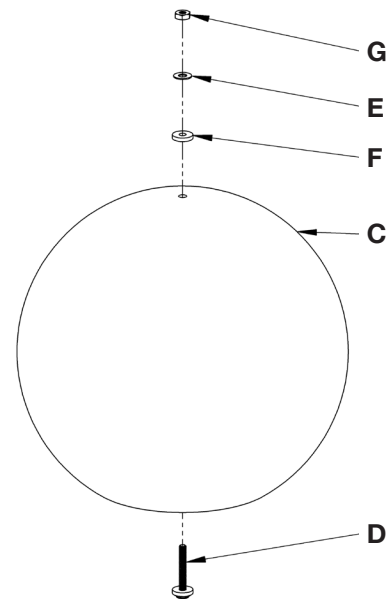

(Figure 1)

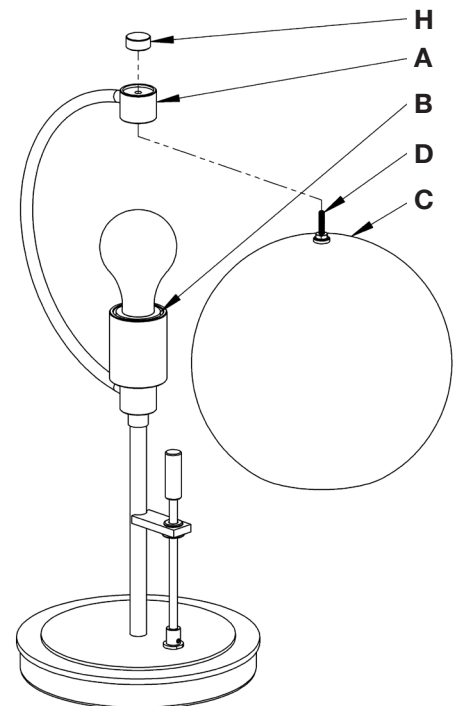

(Figure 2)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.