


ASSEMBLY & INSTALLATION INSTRUCTIONS

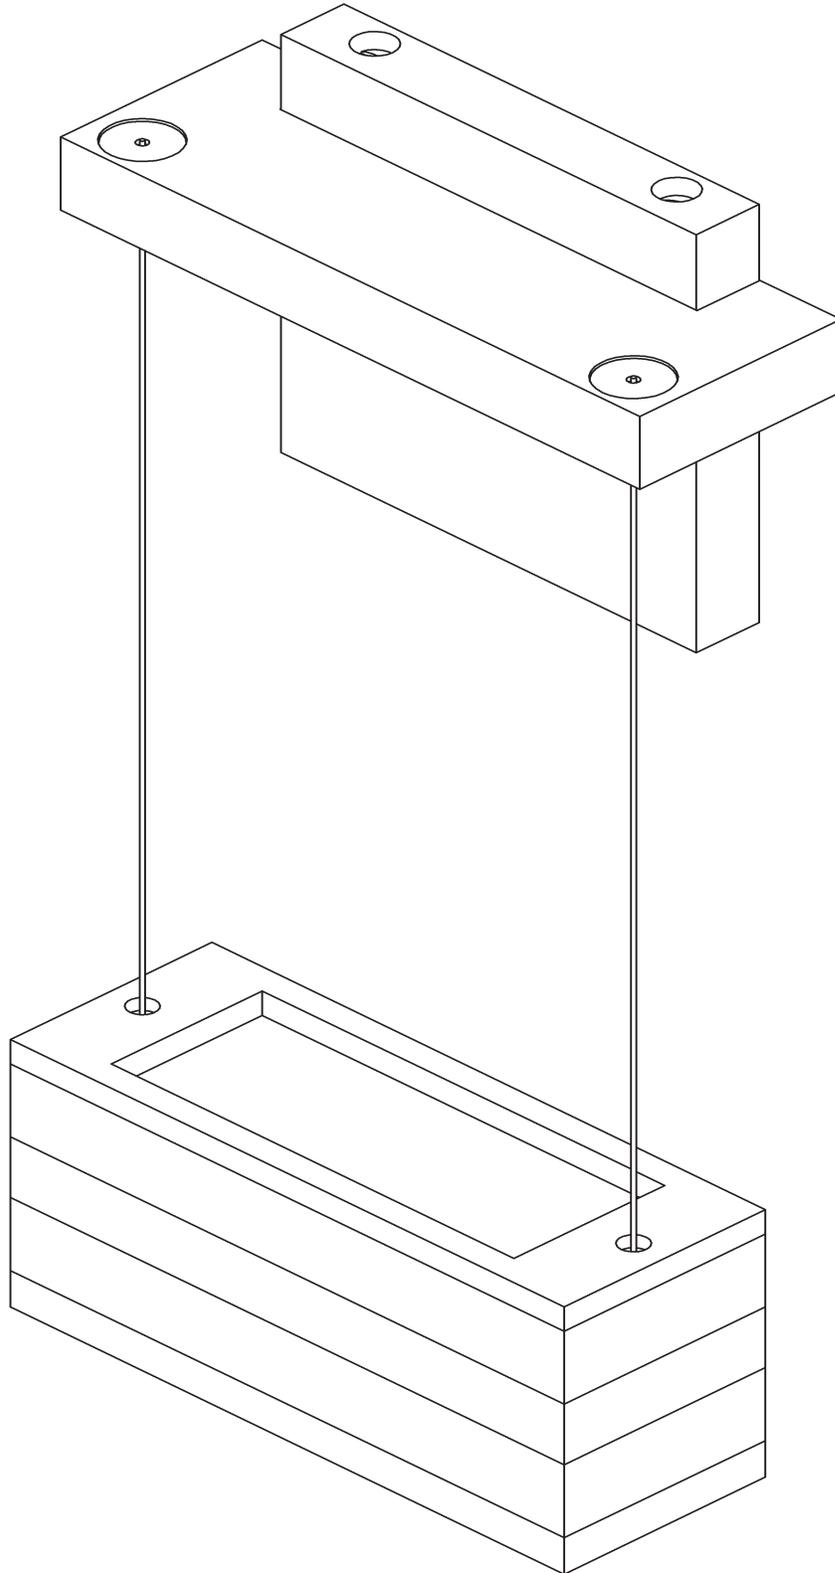

ASSEMBLY & INSTALLATION INSTRUCTIONS

COMPONENT PARTS

A	Crossbar
B	Fixture
C	Driver
D	Cupped Washer
E	Ground Screw
F	#8 Screws (4)
G	Accent Piece
H	Supply/Support Cables (2)
I	Grippers (2)
J	Plastic Caps (2)

ASSEMBLY & INSTALLATION INSTRUCTIONS

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. This fixture must be installed by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

TO INSTALL TO WALL (FIGURE 1)


1. Carefully unpack the fixture from the carton.
2. Using two machine screws (not provided) attach crossbar (A) to the electric box.

NOTE: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.

3. Hold fixture (B) close to the wall. Using suitable wire connectors (not provided) connect the fixture wires from driver (C) to supply wires (white to white and black to black). Attach a pigtail lead to crossbar (A) using the cupped washer (D) and ground screw (E). Connect all ground wires (bare copper or green to bare copper or green).

CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRES ARE EXPOSED.

4. Once connections are made push all wires and driver (C) through the hole in the center of crossbar (A) and into the electric box.
5. Push fixture (B) firmly against the wall, making sure that no wires are pinched between fixture and wall. Attach fixture (B) to the wall using the #8 screws (F) (Figure 1)
6. See instructions on next page to finish installation.

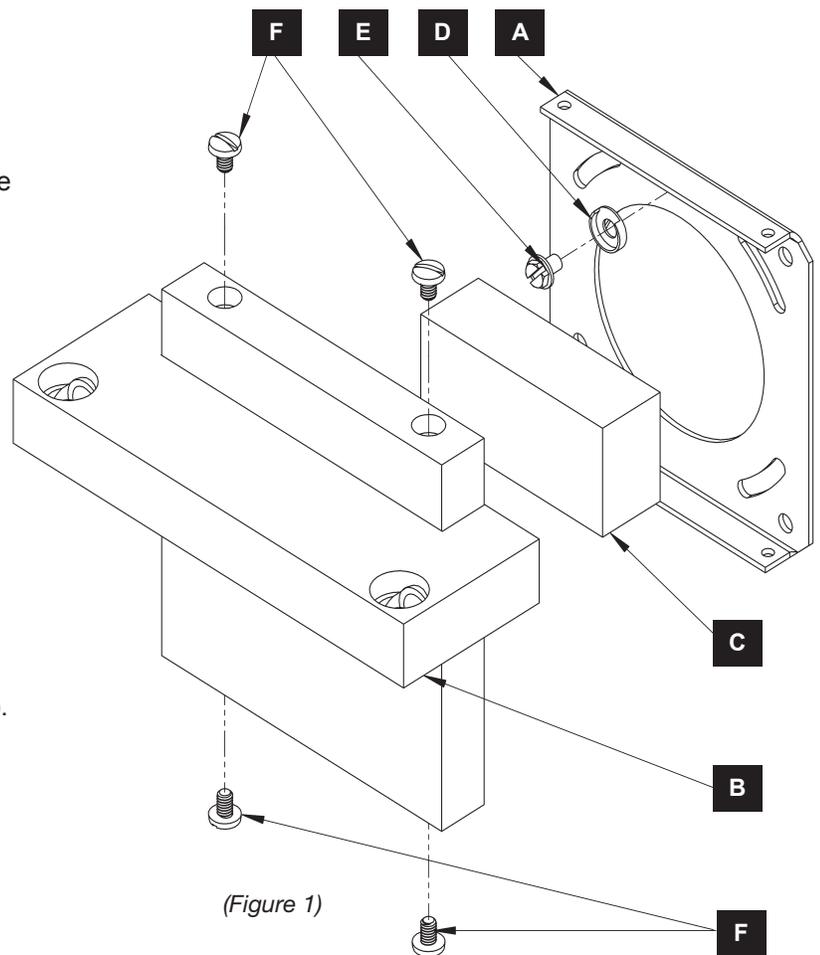

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

*ART+ALCHEMY will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.


ASSEMBLY & INSTALLATION INSTRUCTIONS

TO FINISH INSTALLATION (FIGURE 2)

1. Locate accent piece (G) and uncoil the supply/support cables (H) in order to find the (+) and (-) cable.
2. Locate grippers (I) and align the (+) cable (H) with the (+) gripper and the (-) cable with the (-) gripper. Slide supply/support cables (H) through the grippers (I) until the desired height of accent piece (G) is reached.
3. Using the provided wire cutters (not pictured) cut the supply/support cable (H) as close to the top of the gripper (I) as possible.

NOTE: Once supply/support cables (H) are cut the accent piece (G) can no longer be lowered. Make sure desired height is reached before cutting cables.

4. Cover both grippers (I) and the trimmed supply/support cables (H) with the plastic caps (J). (Figure 2)
5. Restore electricity at main breaker.

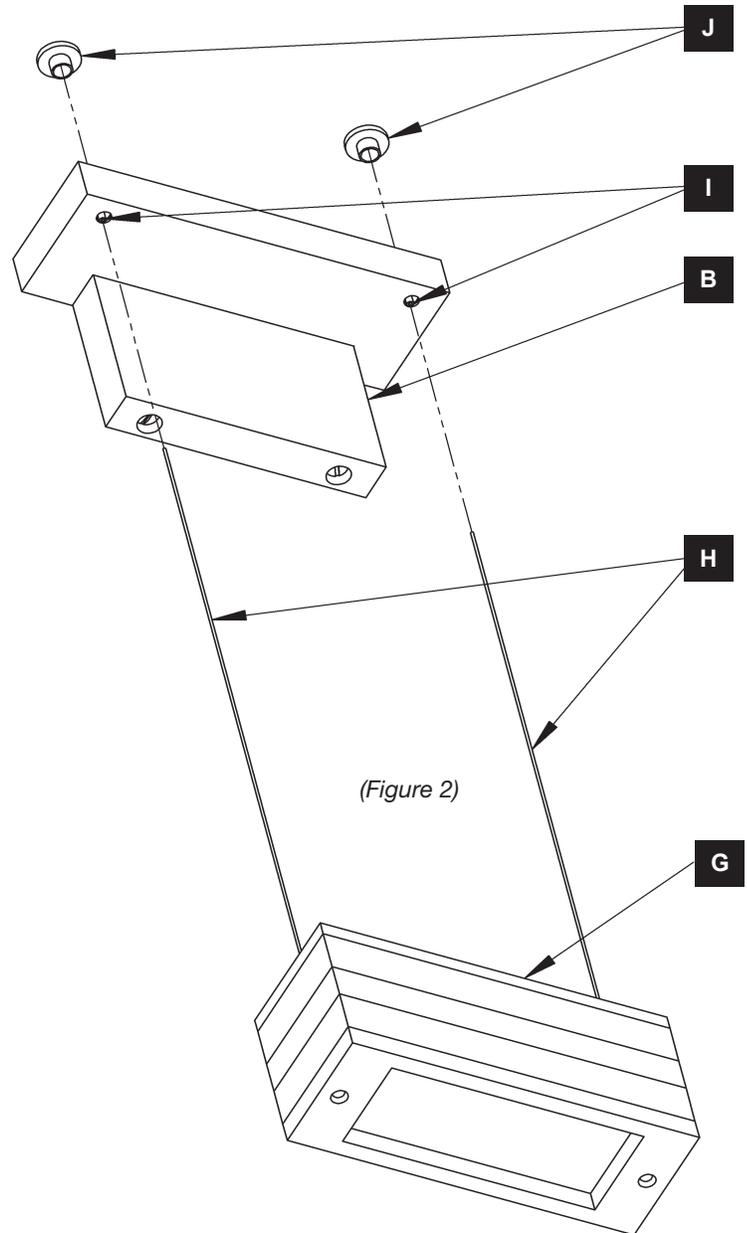

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

***ART+ALCHEMY will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.**