

Mirror Installation Instructions

F07

CAUTION: FAILURE TO INSTALL THIS PRODUCT PROPERLY MAY RESULT IN PERSONAL INJURY OR PROPERTY DAMAGE. We recommend installation by a qualified individual trained in the building trade.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*


Component Parts

- A** Anchor
- B** Screw
- C** Saw Tooth Hanger strip

To Install

Caution: Mirror is heavy. Make sure the mounting surface is in good repair and capable of supporting the weight of the mirror. If in doubt, consult a qualified builder. Attaching mirror directly to a framing member is recommended. If attaching directly to a framing member, omit anchor (A) from the installation.

1. Install anchor (A), if applicable, by threading it directly into the drywall using a number 2 Phillips screwdriver.
2. Install screw (B) into anchor, or directly into framing member, leaving approximately 1/8" of space between the head of the screw and the wall surface.
3. Hang and level mirror from screw by placing the saw tooth hanger strip (C) onto the screw.

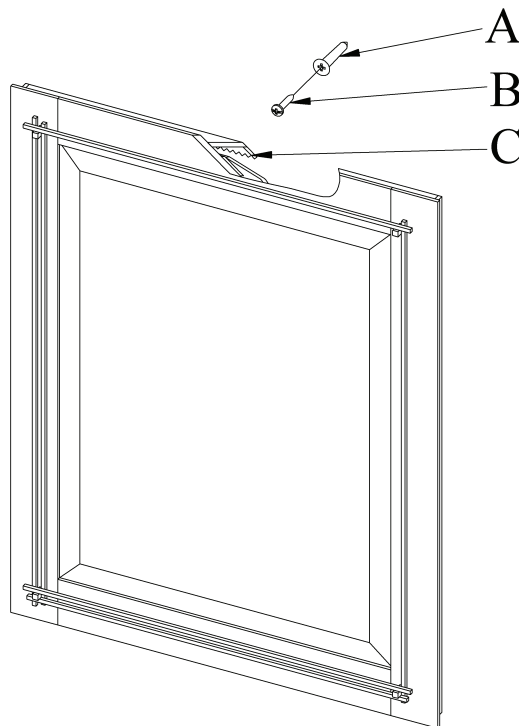

* Hubbardton Forge will not be liable for injury or damage caused by improper installation or use of this product.